

## **SPECIFICATIONS:**


Insulation Resistance: 1,000M $\Omega$  min. at 500V DC Withstanding Voltage: 500Vrms for 1min Voltage Rating: AC250Vrms DC Current Rating: 0.5A Contact Resistance: 100m $\Omega$  max. at 20mV max. Operating Temp.: - 25°C ~ +85°C Mating Cycle: 10,000 times

## **MATERIALS AND FINISH:**

- Contacts: PB
- Insulator: LCP


## **FEATURES**:

- · Card-detection switch
- · Card-flyout break
- Write protection switch
- · RoHS and REACH Compliant





## **OUTLINE DIMENSIONS (mm, With Card Detection Switch):**

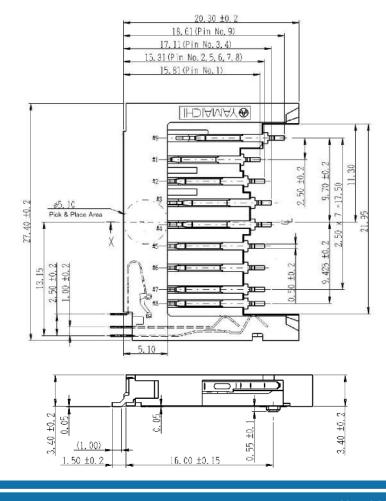

© 2020 Yamaichi Electronics USA Incorporated. All brand or product names may be trademarks of their respective companies.

Yamaichi Electronics USA Inc. Visit Us @ WWW.YEU.COM Email: Info@yeu.com TEL: 408-715-9100

\*\*DISCLAIMER: PRODUCT DATA & DIMENSIONS ARE SUBJECT TO CHANGES WITHOUT NOTICE\*\*