


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00425	Connector, plug, USB A	1	
2	50-00030	Connector, dc plug, 2.35x0.7xL20.8 mm, EIAJ-1, molding style, spring contacts	1	
3	30-00008	Wire, 2C BC, 22 AWG, UL2468, 300V, 80C, 3.6 mm, PVC, 87A	1	
4	24-00023	Overmold, PVC, black	1	
5	24-00063	Overmold, PVC, black	1	
6	Label 259	Adhesive, flag, 15x65 mm	1	

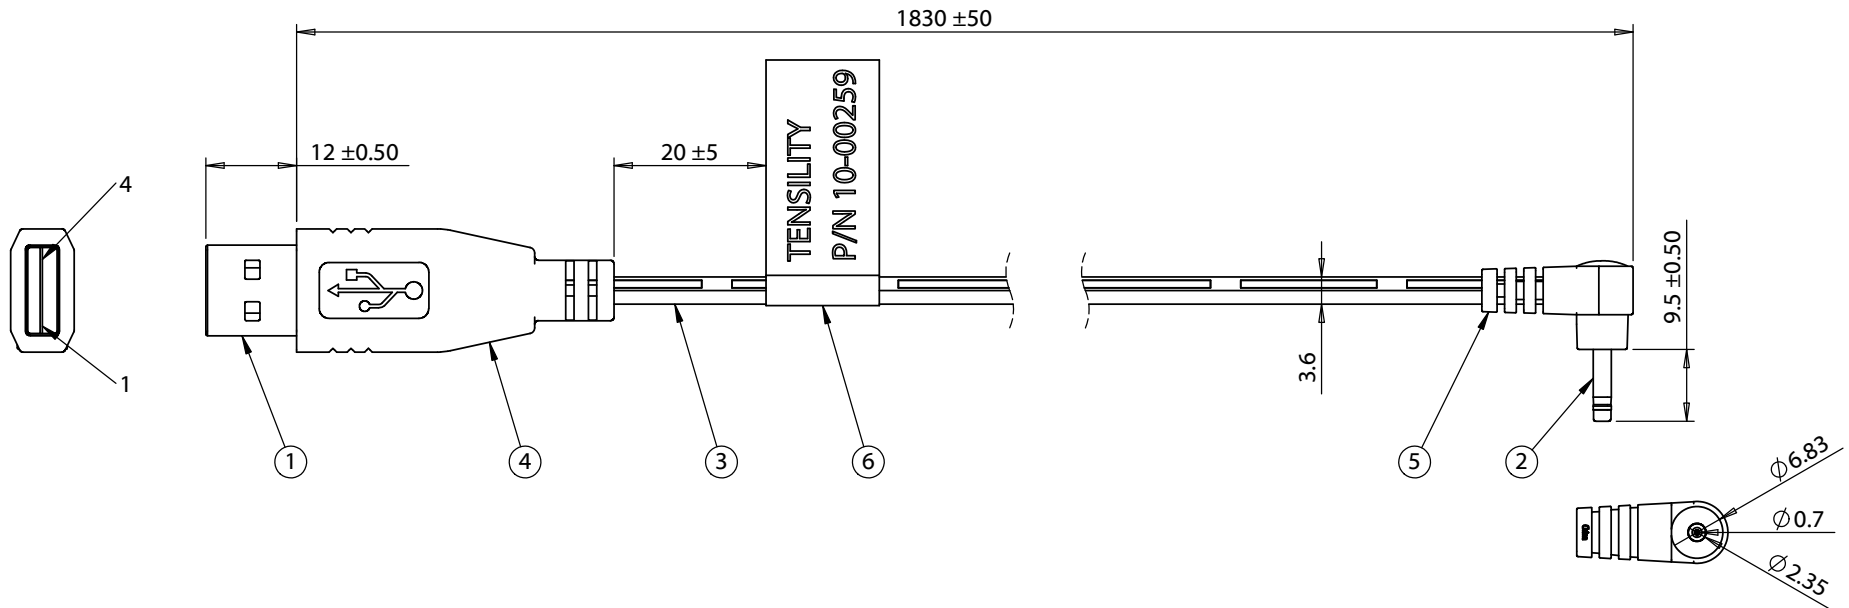

Wiring diagram		
50-00425	Wire Color	50-00030
1	Black with stripe	Sleeve
2	N.C.	-
3	N.C.	-
4	Black	Center

Notes:

Electical requirement: 1 A, 5 Vdc

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>				
A	11/10/2009	Initial release	GL 2016.02.12 10:03:37 -08'00'	RoHS compliant					
A1	3/18/2010	Added label drawing	Verified: LA Digitally signed by LA, DN: cn=LA, o=Tensility, ou=Engineering, email=LA@000259.tensility.com, c=US Date: 2016.02.12 13:20:23 -08'00'	Function test: no open, no short circuit, no intermittent					
A2	9/6/2011	Updated specifications	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, USB A plug to 2.35x0.7x9.5mm 90° 50-00030 plug, center neg, 22 AWG, UL2468, 30-00008					
A3	8/9/2012	Added label specs and updated wire part number			<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>10-00259</td> </tr> </table>	Size:	Part number:	A	10-00259
Size:	Part number:								
A	10-00259								
					<table border="1"> <tr> <td>Scale:</td> <td>1:1</td> <td></td> <td>Sheet 1 of 1</td> </tr> </table>	Scale:	1:1		Sheet 1 of 1
Scale:	1:1		Sheet 1 of 1						