




5000 MHz Ceramic Bandpass Filter

P/N: AM5000B1141

| | |
|---------------------------------|---|
| Center Frequency (Fo) | 5000 MHz |
| Bandwidth(BW) | 400MHz |
| Insertion Loss (Fo) | 3.5 dB max |
| Ripple in BW | 1.3 dB max |
| VSWR in BW | 1.7 : 1 min |
| Attenuation | 18dB min at 4700MHz 18dB min at 5300MHz 50dB min at 5700MHz 50dB min at DC~4400MHz |
| In/Out Impedance | 50 Ω |
| Operating Temp Range | -20 ~ 60°C |
| This product is RoHs compliant. | |

DIMENSIONS

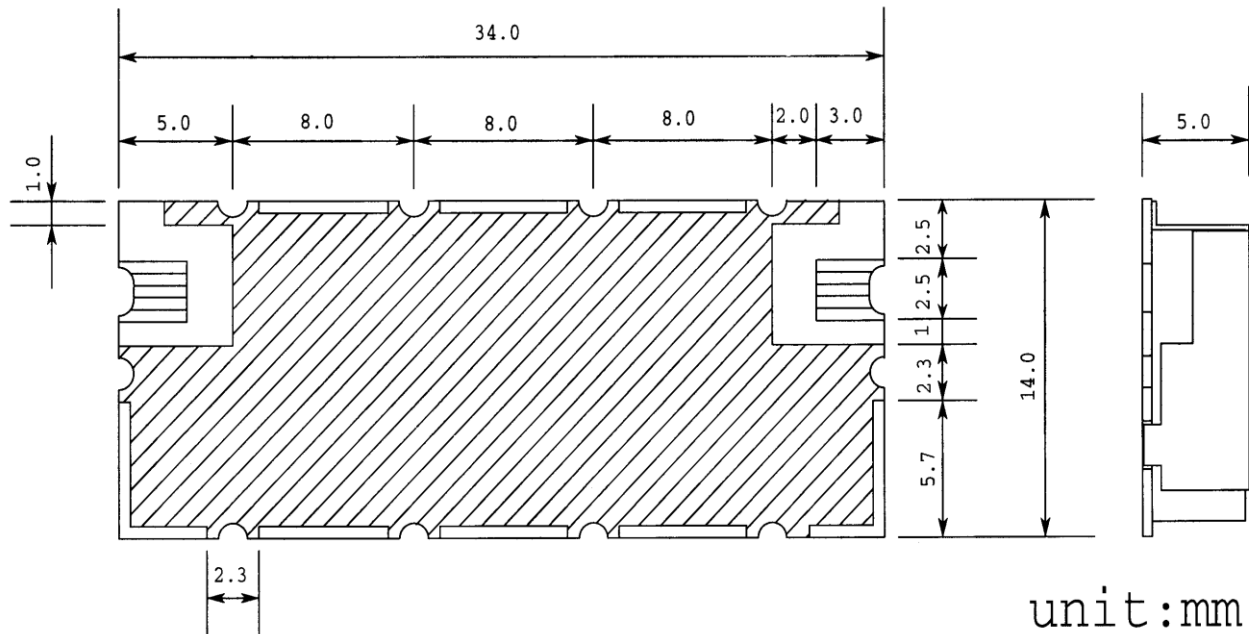



5000 MHz Ceramic Bandpass Filter

P/N: AM5000B1141

