


**NOT RECOMMENDED
FOR NEW DESIGNS
USE PDS1040CTL**

Features

- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- Low Forward Voltage Drop
- Very Low Reverse Leakage Current
- For Use in Low Voltage, High Frequency Inverters, OR'ing, and Polarity Protection Applications
- **Available in Lead Free Finish/RoHS Compliant Version (Note 1)**

Mechanical Data

- Case: POWERMITE®3 Molded Plastic
- Plastic Material: UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram
- Marking: See Page 4
- Weight: 0.072 grams (approx.)

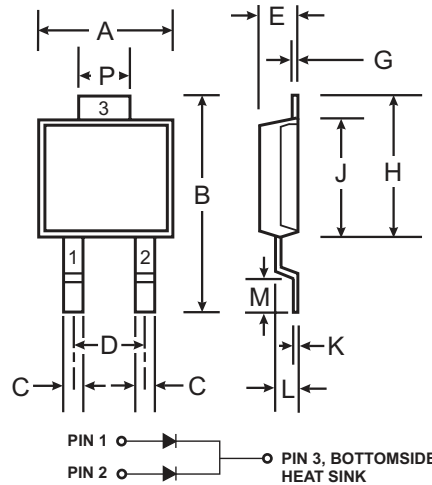

POWERMITE®3		
Dim	Min	Max
A	4.03	4.09
B	6.40	6.61
C	.864	.914
D	1.83 NOM	
E	1.10	1.14
G	.173	.203
H	5.01	5.17
J	4.37	4.43
K	.173	.203
L	.71	.77
M	.36	.46
P	1.73	1.83
All Dimensions in mm		

Maximum Ratings @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.


Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	40	V
RMS Reverse Voltage	V _{R(RMS)}	28	V
Average Rectified Output Current (Also see Figure 5)	per element total device	5 10	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave Superimposed on Rated Load Per Package, total device T _C = 115°C	I _{FSM}	50	A
Typical Thermal Resistance Junction to Soldering Point Per Element	R _{θJS}	2.5	°C/W
Operating Temperature Range	T _j	-55 to +150	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Notes: 1. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see EU Directive Annex Notes 5 and 7.


Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)	$V_{(BR)R}$	40	—	—	V	$I_R = 500\mu\text{A}$
Forward Voltage	Per Element	V_F	—	0.45 0.39 0.53 0.50	0.48 0.42 0.575 0.55	V $I_F = 5\text{A}, T_j = 25^\circ\text{C}$ $I_F = 5\text{A}, T_j = 100^\circ\text{C}$ $I_F = 10\text{A}, T_j = 25^\circ\text{C}$ $I_F = 10\text{A}, T_j = 100^\circ\text{C}$
Reverse Current (Note 2)	Per Element	I_R	—	35 4 10 2	150 10 80 5	μA mA μA mA $V_R = 35\text{V}, T_j = 25^\circ\text{C}$ $V_R = 35\text{V}, T_j = 100^\circ\text{C}$ $V_R = 17.5\text{V}, T_j = 25^\circ\text{C}$ $V_R = 17.5\text{V}, T_j = 100^\circ\text{C}$
Total Capacitance	Per Element	C_T	—	375	—	pF $f = 1.0\text{MHz}, V_R = 4.0\text{V DC}$

Notes: 2. Short duration test pulse used to minimize self-heating effect.

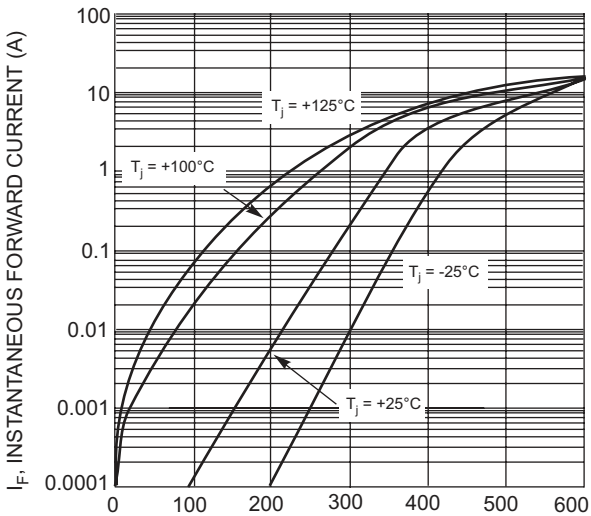

V_F , INSTANTANEOUS FORWARD VOLTAGE (mV)
Fig. 1 Typical Forward Characteristics, Per Element

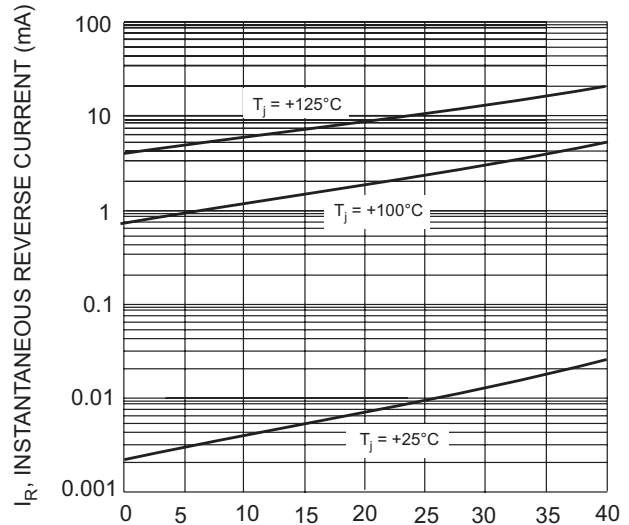

V_R , INSTANTANEOUS REVERSE VOLTAGE (V)
Fig. 2 Typical Reverse Characteristics, Per Element


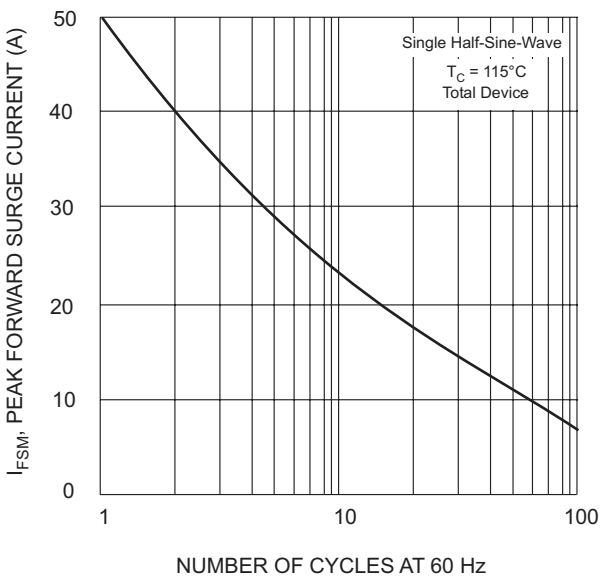


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

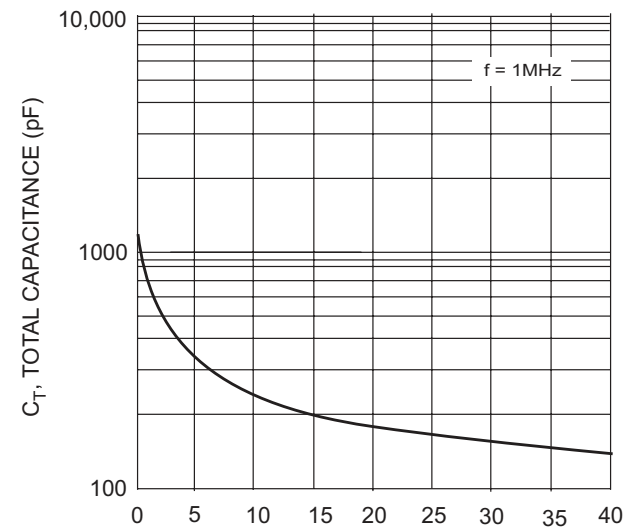

V_R , REVERSE VOLTAGE (V)
Fig. 4 Typical Capacitance vs. Reverse Voltage, Per Element

**NOT RECOMMENDED
FOR NEW DESIGNS
USE PDS1040CTL**

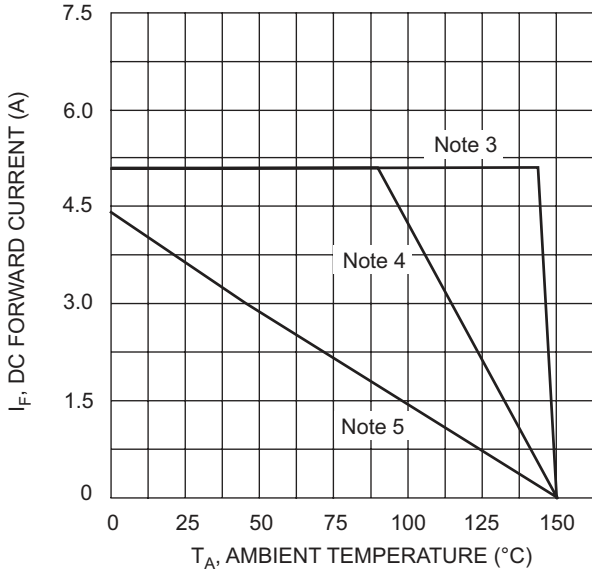


Fig. 5 DC Forward Current Derating, Per Element

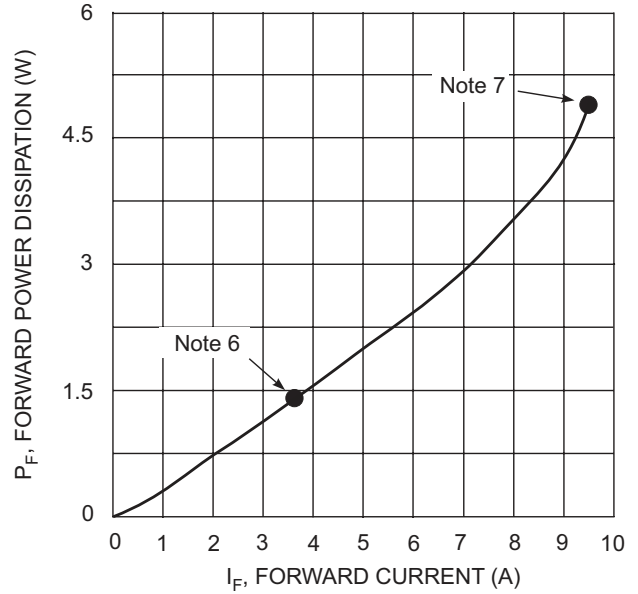


Fig. 6 Forward Power Dissipation, Per Element

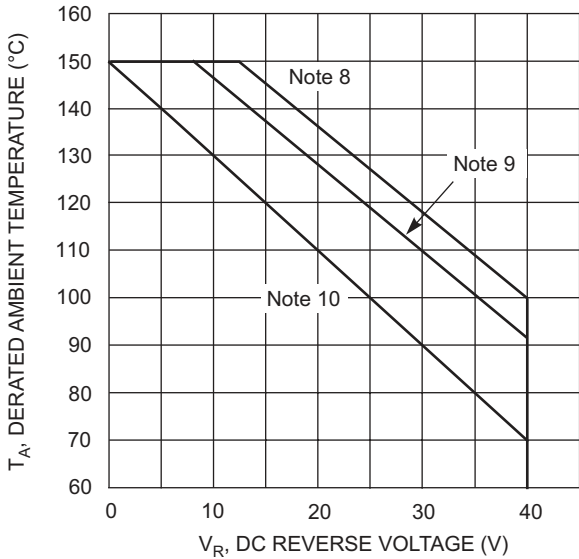


Fig. 7 Operating Temperature Derating, Per Element

**NOT RECOMMENDED
FOR NEW DESIGNS
USE PDS1040CTL**


- Notes:
- $T_A = T_{\text{SOLDERING POINT}}$, $R_{\theta JS} = 2.5^\circ\text{C/W}$, $R_{\theta SA} = 0^\circ\text{C/W}$.
 - Device mounted on GETEK substrate, 2"x2", 2 oz. copper, double-sided, cathode pad dimensions 0.75" x 1.0", anode pad dimensions 0.25" x 1.0". $R_{\theta JA}$ in range of 25-30°C/W.
 - Device mounted on FR-4 substrate, 2"x2", 2 oz. copper, single-sided, pad layout as per Diodes Inc. suggested pad layout document AP02001 which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>. $R_{\theta JA}$ in range of 95-100°C/W.
 - Maximum power dissipation when the device is mounted in accordance to the conditions described in Note 4.
 - Maximum power dissipation when the device is mounted in accordance to the conditions described in Note 3.
 - $R_{\theta JA} = 10\text{-}15^\circ\text{C/W}$ when mounted on 2"x2", single-sided, ceramic board with cathode pad dimensions 0.75"x1.0", anode pad dimensions 0.25"x1.0".
 - $R_{\theta JA} = 20\text{-}25^\circ\text{C/W}$ when mounted on 2"x2", single-sided, FR-4 board with cathode pad dimensions 0.5"x1.0", anode pad dimensions 0.5"x1.0", 2 oz. copper pads.
 - $R_{\theta JA} = 60\text{-}65^\circ\text{C/W}$ when mounted on 0.5"x0.625", single-sided, FR-4 board with minimum recommended pad layout.

Ordering Information (Note 11)

Device	Packaging	Shipping
SBM1040CT-13	POWERMITE®3	5000/Tape & Reel

- Notes: 11. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.
 12. For Lead Free Finish/RoHS Compliant version part number, please add "-F" suffix to the part number above. Example: SBM1040CT-13-F.

Marking Information



SBM1040CT = Product type marking code
 D||| = Manufacturers' code marking
 YYWW = Date code marking
 YY = Last digit of year ex: 02 for 2002
 WW = Week code 01 to 52
 (K) = Factory designator

**NOT RECOMMENDED
 FOR NEW DESIGNS
 USE PDS1040CTL**

IMPORTANT NOTICE

Diodes, Inc. and its subsidiaries reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Diodes, Inc. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

The products located on our website at www.diodes.com are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the expressed written approval of Diodes Incorporated.