

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				. .	△				. .
△				. .	△				. .

APPLICABLE STANDARD			
RATING	OPERATING TEMPERATURE RANGE	-25 °C TO +85 °C	STORAGE TEMPERATURE RANGE
			0 °C TO +60 °C
		APPLICABLE CABLE	

S P E C I F I C A T I O N S

ITEM	TEST METHOD	REQUIREMENTS	QT	AT
CONSTRUCTION				
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	○	○
MARKING	CONFIRMED VISUALLY.		○	○


ELECTRICAL CHARACTERISTICS				
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h	NO HEAVY CORROSION	○	-
SEALING	EXPOSED AT A DEPTH OF 0.5 mm FOR 48 h.	NO WATER PENETRATION INSIDE CONNECTOR.	○	-
AIRTIGHTNESS	APPLY AIR PRESSURE 5 KPa FOR 30 sec TO INSIDE CONNECTOR.	NO AIR BUBBLES INSIDE CONNECTOR.	○	-

FOR REFERENCE ONLY
Subject to change without notice

REMARKS	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		H. Kishi 95.8.22	H. Kishi 95.8.22	<i>M. Yoshida</i> 95.8.23	
NOTE: ROOM TEMPERATURE. Unless otherwise specified, refer to JIS C 5402.					
Note QT: Qualification Test AT: Assurance Test ○: Applicable Test					
HRS HIROSE ELECTRIC CO., LTD.		SPECIFICATION SHEET		PART NO. RM12WBR-C	
CODE NO. (OLD)	DRAWING NO.	CODE NO.			
CL	ELC4-008682	CL 109-1054-0		1.1	

TO
R

1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE				
△							..	△							..				
△							..	△							..				
△							..	△							..				

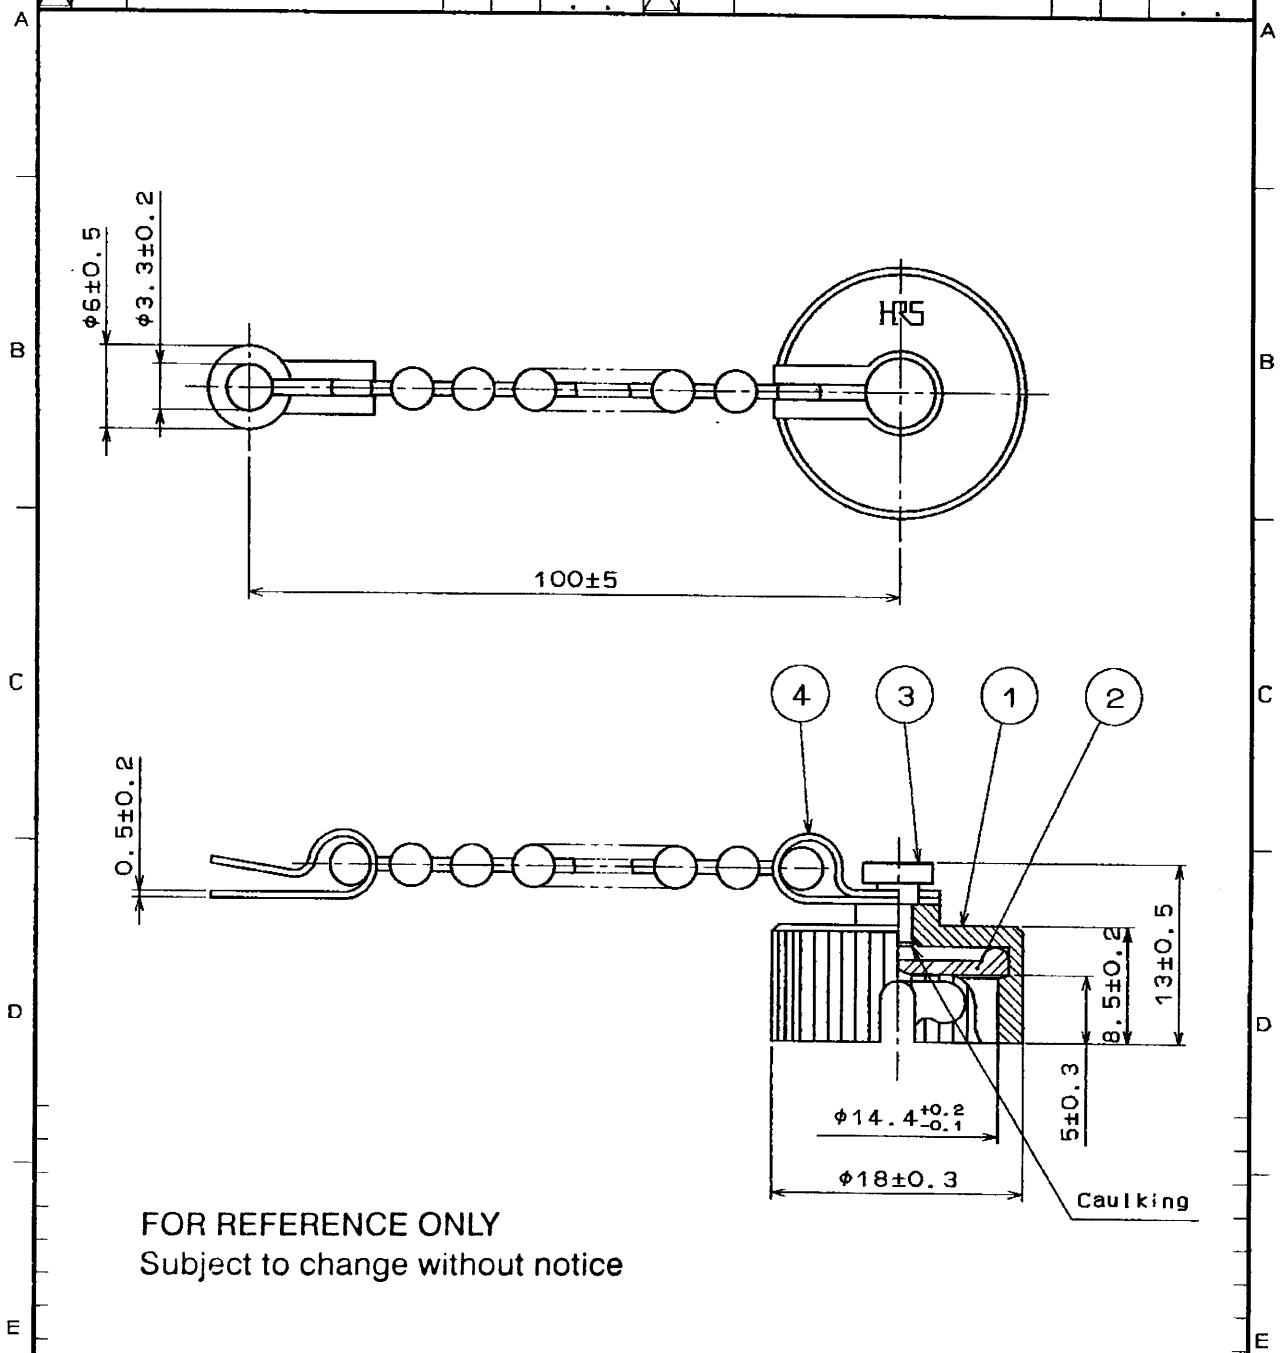

FOR REFERENCE ONLY
Subject to change without notice

2	SYNTHETIC RUBBER	(BLACK)	4	BRASS	NICKEL PLATING		
1	BRASS	NICKEL PLATING	3	BRASS	NICKEL PLATING		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		H. Kishi	H. Kishi		<i>M. Yoshida</i>	
		95.8.22	95.8.22		95.8.23	

 SCALE 2 : 1 UNITS mm	DRAWING NO. EDC4-008682	PART NO. RM12WBR-C
	 HIROSE ELECTRIC CO., LTD.	CODE NO. CL109-1054-0

TO
R