
PROPRIETARY INFORMATION:		
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR	REV	
USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK.INC.	A	
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		
		•

	REVISION						
	REV	DESCRIPTION	DATE	APPROVED			
	A	INITIAL RELEASE	04/10/18	MK			

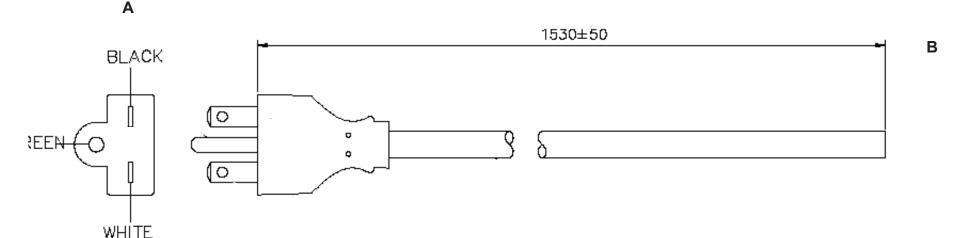

DATE:

04/10/18

SCALE: NONE

APRVD: DMR

GENERAL SPECIFICATIONS:

RATING: 15A / 250V AC

CABLE TYPE / SIZE: SJT0, # 14 AWG, 3 CONDUCTOR

TEMPERATURE RATING: 105° C

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: BLACK

OVERALL LENGTH (L): $1525 \pm 50 \text{ mm}$ CABLE OUTER DIAMETER: $9.3 \pm 0.15 \text{ mm}$ END 'A' PLUG; NEMA 6-15P END 'B' CUT BLUNT APPROVALS PLUG: UL, CSA OR cUL APPROVALS CABLE: UL, CSA OR cUL

PACKING:

BULK PACKED, BUNDLES OF 25.
MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS AND/ OR FILE NUMBERS.





OR



RELEASED

By N.Frost at 11:06 am, Apr 10, 2018

SHEET 1/1



Foot rote:

Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper

installation instruction.

Contents of this document

prior notice

are subject to change without

Limitation of Use: Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

DASH PART NO REV. DESCRIPTION NOTES NO TABULATION BLOCK TOLERANCES: REV **GlobTek**,⊓nc. DECIMALS ANGULAR 186 Veterans Dr. Northvale, NJ 07647 xx +/= 0.1 Tel. 201-784-1000 Fax 201.784.0111 SHEET www.globtek.com .xxx +/- .005 MILLIMETERS ANGULAR DWG TITLE: NORTH AMERICAN NON-DETACHABLE CORDSET INIT.BY: FS DATE: .xx +/- 0 3 04/10/18 .xxx +/- .013 DATE: FSCN No.: SIZE REV. DRAWN: NF G, CC Α 04/10/18

3611325F0BBB(R)

PART NO: