

DO NOT SCALE FROM THIS PRINT

SOCKET SPECS		TABLE 1		TYPE AND QUANTITY OF BODIES					
LEAD STYLE	USE SOCKET	# OF FINGER CLIPS	"B"	"C"	-SINGLE			-DOUBLE	
					ESS	SSB	TSW	DSB	RTSW
03	SC-1W1-XX-3	4	.300 [7.62]	.453 [11.51]	1	-	-	2	1
04	SC-1W1-XX-2	4	.400 [10.16]	.553 [14.05]	1	-	1	3	1
05	SC-1W1-XX-1	4	.500 [12.70]	.703 [17.86]	1	1	1	4	1
06	SC-1W1-XX-2	4	.300 [7.62]	.553 [14.05]	1	-	-	2	1
07	SC-1W1-XX-1	4	.400 [10.16]	.703 [17.86]	1	-	1	3	1
08	SC-1W1-XX-1	4	.300 [7.62]	.703 [17.86]	1	-	-	2	1
23	EZ-1W1-XX-3	6	.300 [7.62]	.453 [11.51]	1	-	-	2	1
24	EZ-1W1-XX-2	6	.400 [10.16]	.553 [14.05]	1	-	1	3	1
25	EZ-1W1-XX-1	6	.500 [12.70]	.703 [17.86]	1	1	1	4	1
26	EZ-1W1-XX-2	6	.300 [7.62]	.553 [14.05]	1	-	-	2	1
27	EZ-1W1-XX-1	6	.400 [10.16]	.703 [17.86]	1	-	1	3	1
28	EZ-1W1-XX-1	6	.300 [7.62]	.703 [17.86]	1	-	-	2	1

ESX-1XX-XX-XX-X

ROW SPECIFICATION

-D: DOUBLE
-S: SINGLE

OPTION

-L: LOCKING LEAD (SEE FIG 3)

BODY LENGTH SPEC

-01 THRU -36 (-D)
-01 THRU -32 (-S)

PLATING SPECIFICATION

-G: 10μ" GOLD IN CONTACT AREA,
10μ" GOLD ON TAIL. (SPECIFY -GG IN SOCKET)
-T: 10μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN ON TAIL. (SPECIFY -GT IN SOCKET)
-TT: MATTE TIN IN CONTACT AREA,
MATTE TIN ON TAIL. (SPECIFY -TT IN SOCKET)
(NOT AVAILABLE ON LEAD STYLES 23-28)

LEAD STYLE
SEE TABLE 1

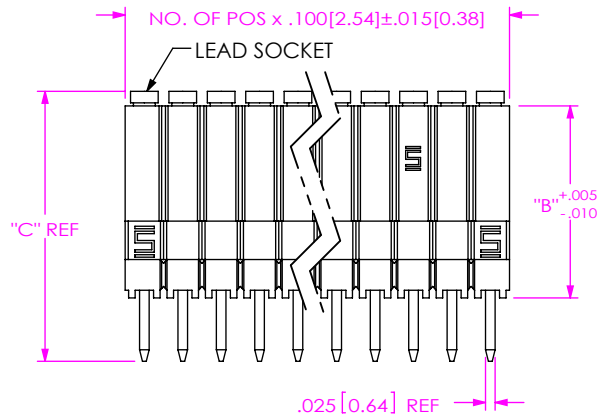


FIG 1
(ESS-1XX-XX-05 SHOWN)

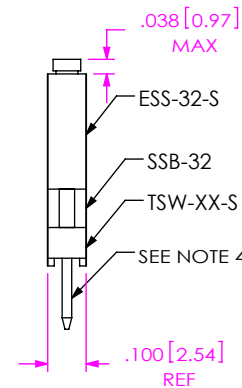


FIG 2
(ESD-1XX-XX-05 SHOWN)
(UNLESS OTHERWISE SPECIFIED, SAME AS FIG 1)



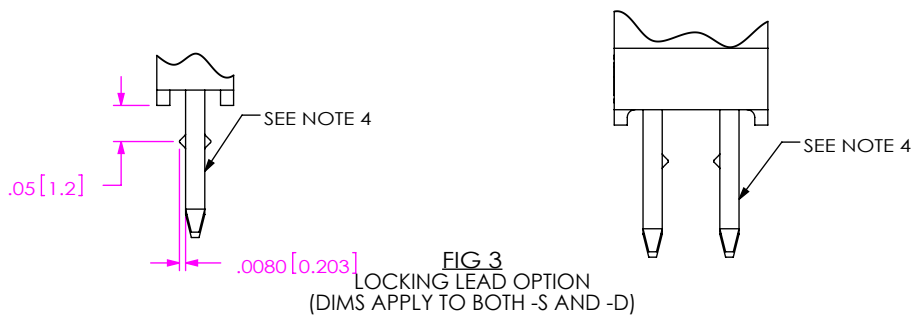


FIG 3
LOCKING LEAD OPTION
(DIMS APPLY TO BOTH -S AND -D)

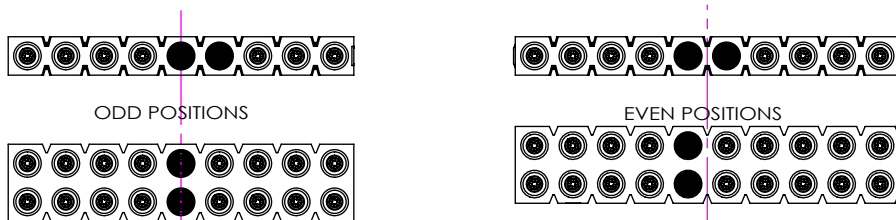

* LOCATION OF POSITION TO BE CRIMPED

NOTES:

- ⊕ REPRESENTS A CRITICAL DIMENSION.
- MAXIMUM ALLOWABLE BOW: .009[0.23] IN/IN.
- MINIMUM PUSHOUT FORCE: 5 LBS.
- .025[0.64] SQ TAILS MUST BE ORIENTED SQUARE TO EACH OTHER ON -L OPTION ONLY.
- TSW-XX-D TO BE USED IF RTSW-XX-D IS NOT AVAILABLE.
- MAXIMUM CUT FLASH (LEAD SOCKET SIDE): .038 [0.97]
MAXIMUM CUT FLASH (TAIL SIDE), WITH STANDOFF: .028 [0.71]
NO STANDOFF: .010 [0.25]
- ALL DSB TO BE FILLED WITH THE COUNTER BORE FACING DOWN.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

DECIMALS ANGLES
.XX: ±.01 [.3] 2°
.XXX: ±.005 [.13]
.XXXX: ±.0020 [.051]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 2:1
INSULATOR: LCP, UL94VO, COLOR: BLACK
CONTACT: BeCu
SHELL: BRASS

DESCRIPTION: ELEVATED SOCKET STRIP

DWG. NO. ESX-1XX-XX-XX-X

BY: PURVIS 07/22/1987 SHEET 1 OF 1