


環保物料專用  
RoHS compliant

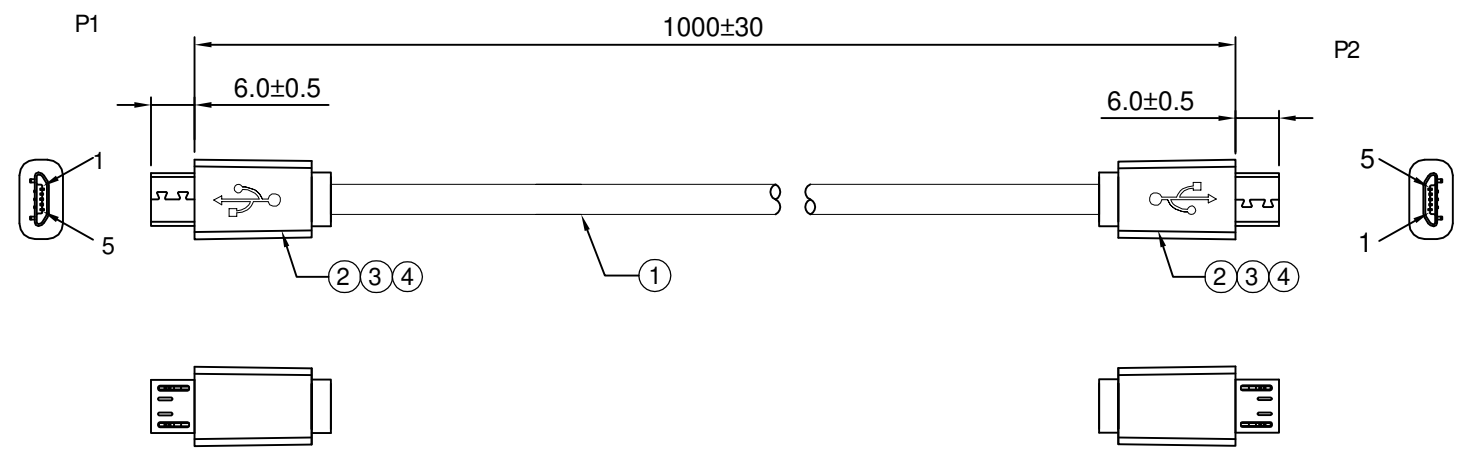

Electrical Character:  
100% Open/ Short  
Contact Resistance:5 Ohms Max.  
Hi-Pot:300V/ 1 Min  
Insulation Resistance:10M Ohms Min.

Bill Of Material

4	CXQS123	OUTER MOLD	Outer Mold 45P PVC Black	g	
3	CXQS123	INNER MOLD	Internal Mold LD-PE Color:translucent	g	
2	CXQS114	CONN.	Micro USB B Male 5 circuits, PBT Black Solder Type	PCS	2
1	CXQS061	CABLE	7/0.12BC*5C( Red 、 Withe 、 Green 、 Black、 Blue) OD=3.2±0.10mm JACKET Color:Black	mm	
No.	Vendor	NAME	Material Name and Name	Unit	Qty

CONN P1	CONN P2	COLOR
1	1	Red
2	2	White
3	3	Green
4	4	Black
5	5	Blue



DESCRIPTION(內容):  
Micro-USB B Male  
To Micro-USB B Male Cable Assembly

DRAWN(製圖):  
**Tom Liu**  
CHECKED(確認):  
Jack Wu


GENERAL TOLERANCE	
LINEAR	ANGLES
X.: ±0.30	X°: ±5.0°
X.X: ±0.20	X.X°: ±3.0°

REV:  
A/ 1  
UNIT:  
mm

REV	DESCRIPTION	DATE
1	ORIGINAL	Jun-19-2019
2		

**A4**

SCALE(比例):  
1:XX



PART NO:  
(料 號) CBUSB-MCBM-MCBM-1000A  
DWG NO(圖號): KWRD190619-002

APPROVAL(核准):  
Kane He

X.XX: ±0.15	X.XX°: ±2.0°
X.XXX: ±0.10	X.XXX°: ±1.0°

SHEET:  
1/2

3		
4		