
PROPRIETARY INFORMATION:		REVISION
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.	REV	DESCRIPTION
	A	INITIAL RELEASE, RFS. 19953, EM
	В	UPDATE CABLE TYPE TO H05VVF, RFS. 20227, EM
	С	UPDATE CABLE TYPE TO 3x1.0, & KOREAN APPROV., RFS. 20248, E
	D	UPDATE KOREAN PLUG PICTURE TO YP-22K, RFS. 22621, EM

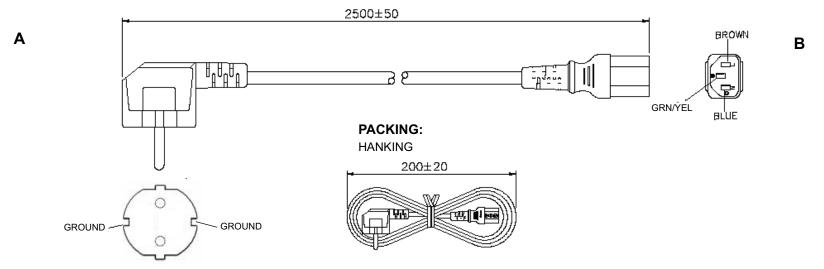

GENERAL SPECIFICATIONS:

RATING: 10A / 250V AC

CABLE TYPE / SIZE: H05VVF 3 x 1.0 mm²

TEMPERATURE RATING: 60°C

CONDUCTOR COLORS: BROWN / BLUE/ GREEN-YELLOW

CABLE JACKET COLOR: BLACK OVERALL LENGTH (L): $2500 \pm 50 \text{ mm}$ CABLE OUTER DIAMETER: $8.5 \pm 0.2 \text{ mm}$

END 'A' PLUG; KOREA KS C 8305 PIN Ø4.8 mm, YP-22K

END 'B' IEC-320 / C13

APPROVALS PLUG: KC
APPROVALS CABLE: KC
APPROVALS CONNECTOR: KC

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).





APPROVED

HM

HM

HM

11/15/10 01/03/11

01/18/11

03/21/12

		DASH NO.	PART NO	REV.				DESCRIPTION		NOTES		
				TABULATION BLOCK								
					TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1* .xxx +/005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northv Tel. 201-784-1000 Fax					
Contents of this document are subject to change without prior notice		Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.	INIT.BY: EM	DATE: 11/15/10	.xx +	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/013		DWG TITLE	: KOREAN POWER CO	ER CORD, 3 x 1.0 mm², HO5VVF		
			DRAWN: NF	DATE: 11/15/10	FSCN G, CC		SIZE A				REV. D	
			APRVD: HM	DATE: 11/15/10	SCA	SCALE: NONE		PART NO:	2313K3432M570	1(R)	SHEET 1/1	