

#### **MIRELLA-G2-M**

~25° wide beam. Compatible with LEDiL HEKLA.

#### **SPECIFICATION:**

Dimensions Ø 49.9 mm
Height 22.6 mm
Fastening socket
ROHS compliant yes ①



#### **MATERIALS:**

ComponentTypeMaterialMIRELLA-G2-MReflectorPC

Colour Finish Coating metal

#### **ORDERING INFORMATION:**

Component

F15559\_MIRELLA-G2-M


» Box size: 480 x 280 x 300 mm

Qty in box MOQ MPQ Box weight (kg) 336 28 3.2

Published: 11/07/2019




# PRODUCT DATASHEET F15559\_MIRELLA-G2-M

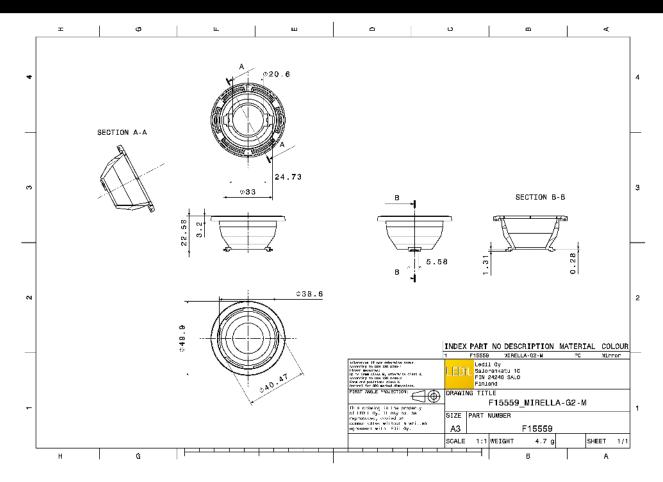


See also our general installation guide: <a href="www.ledil.com/installation\_guide">www.ledil.com/installation\_guide</a>




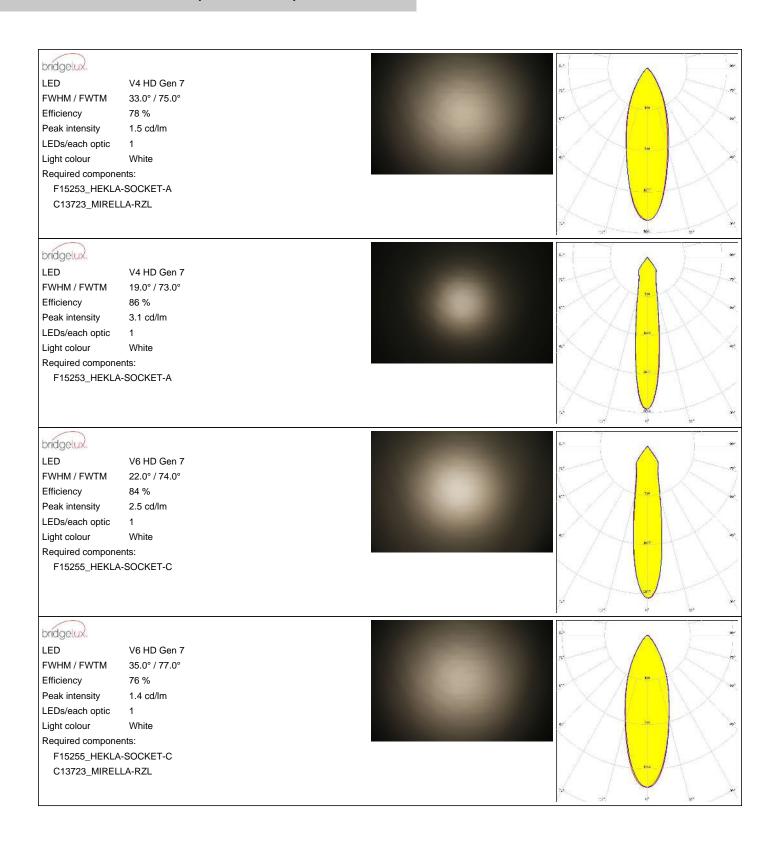




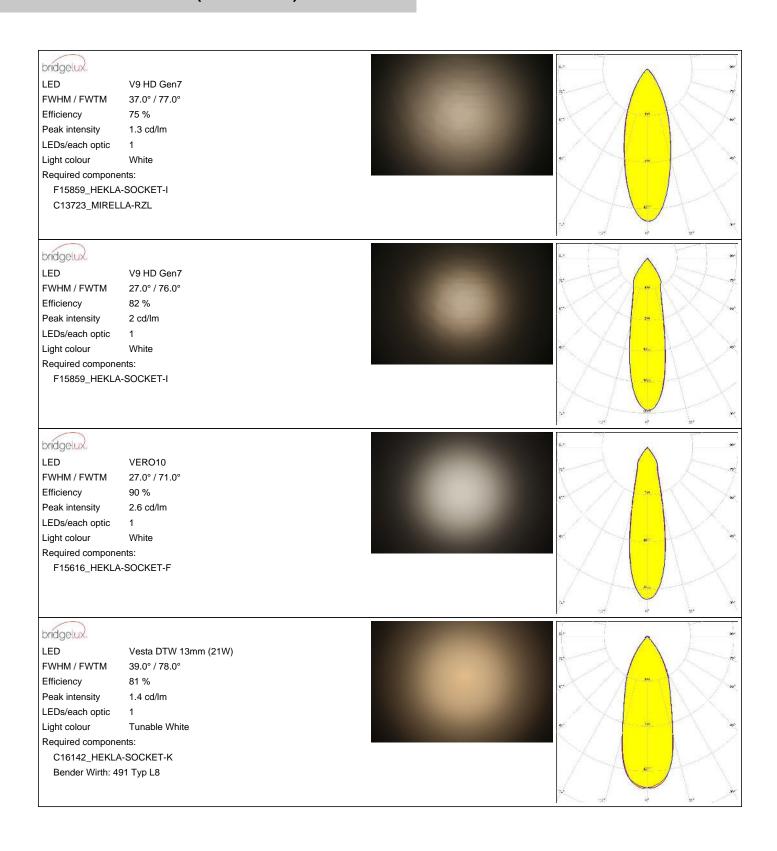




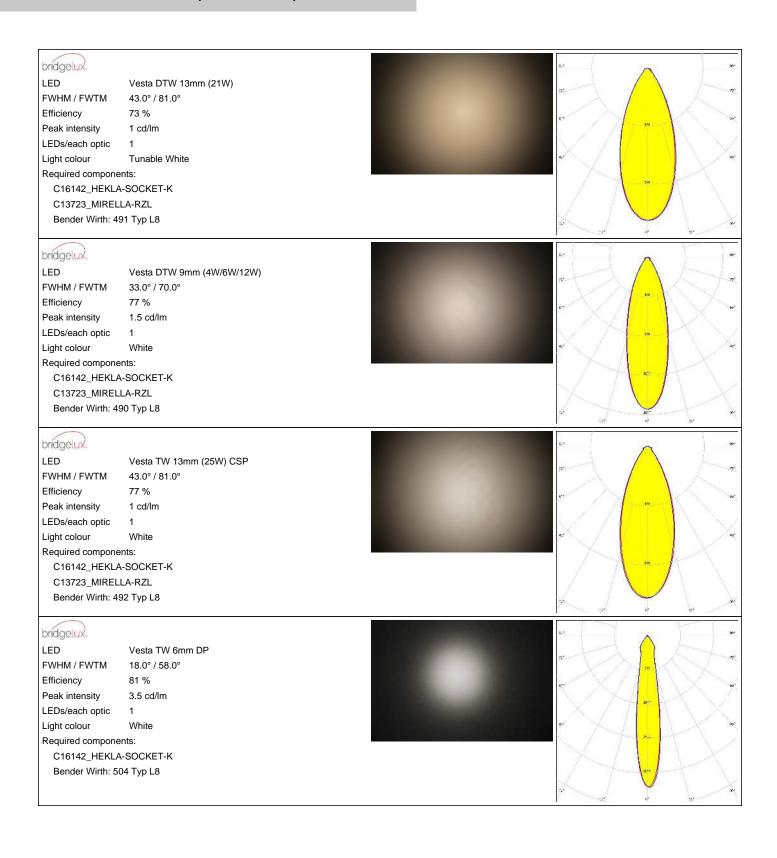




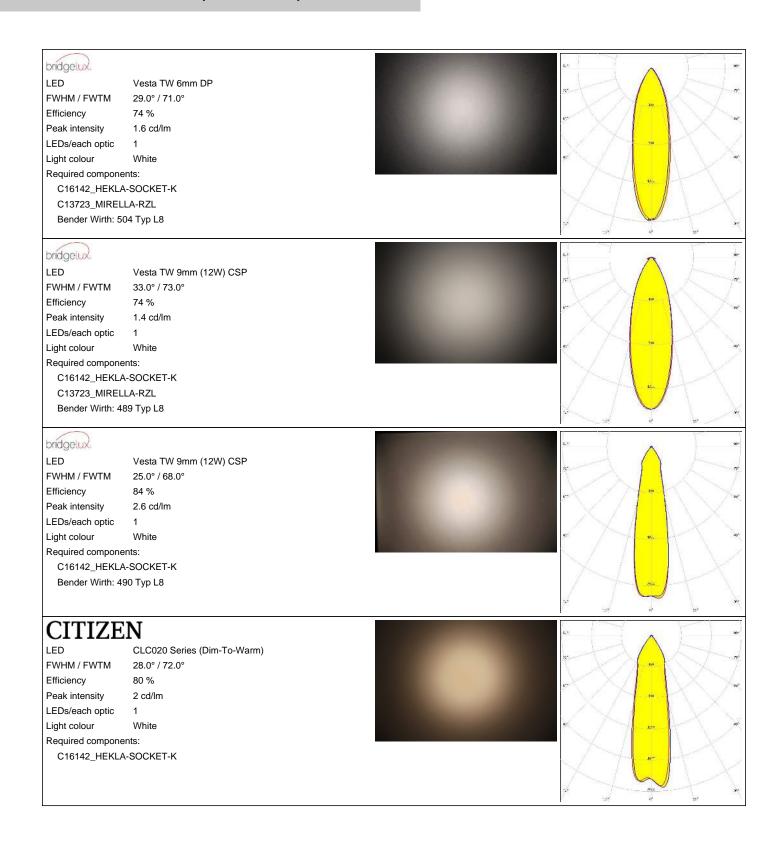



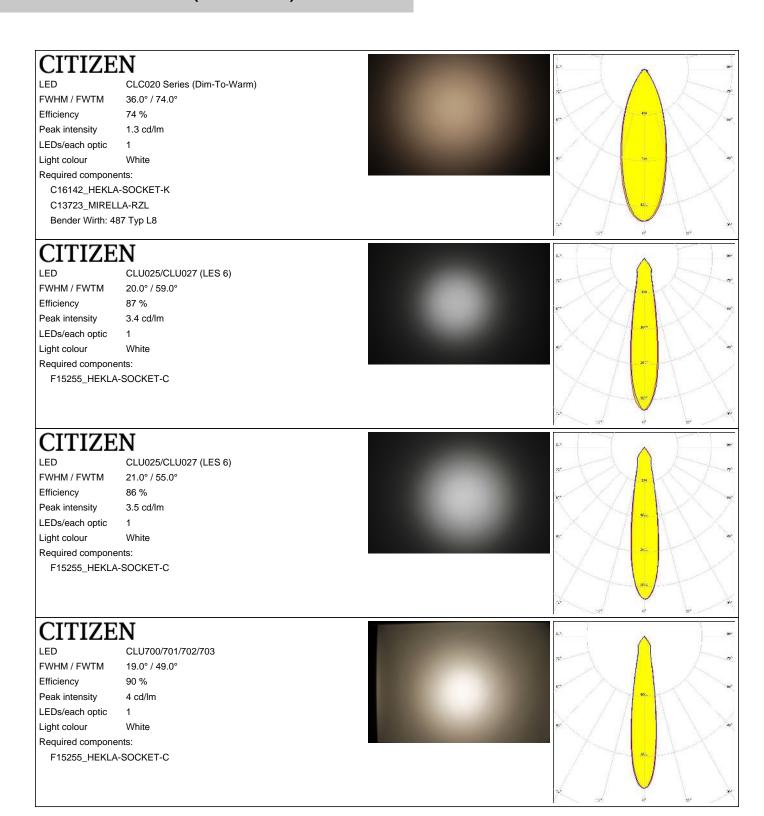




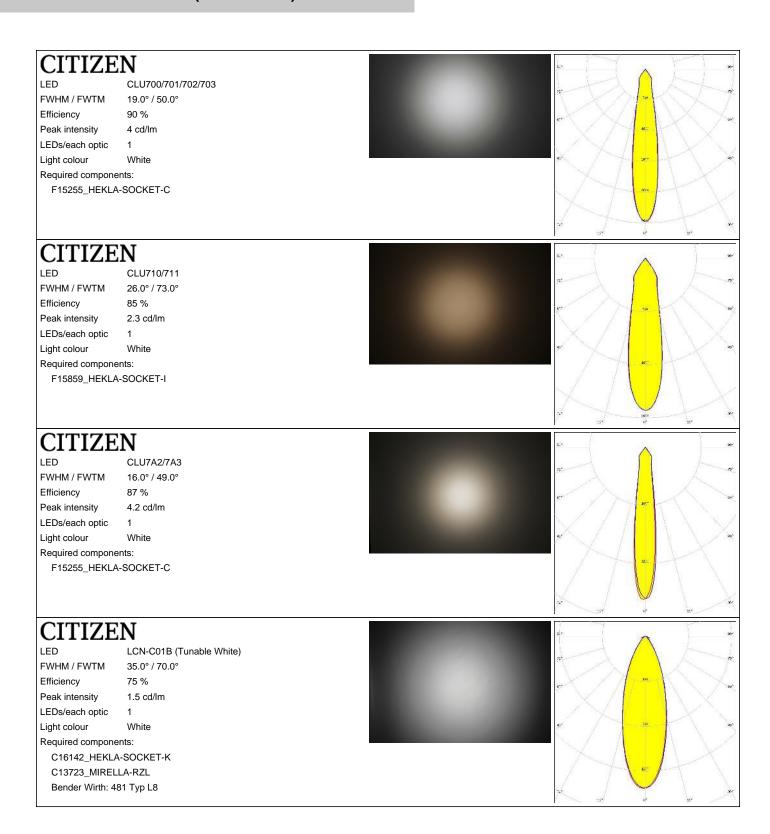


9/26




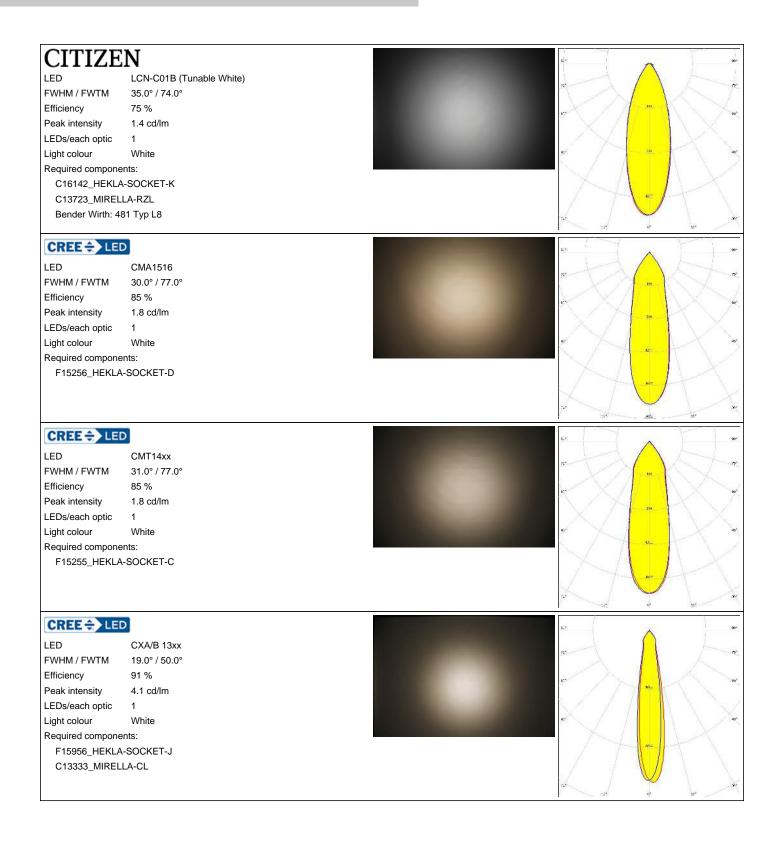




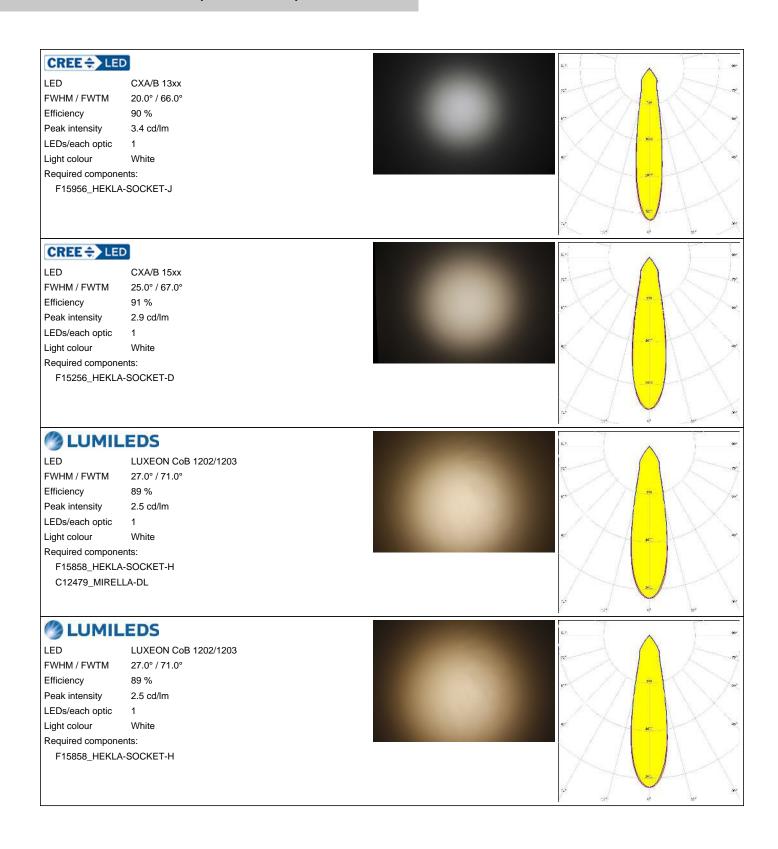




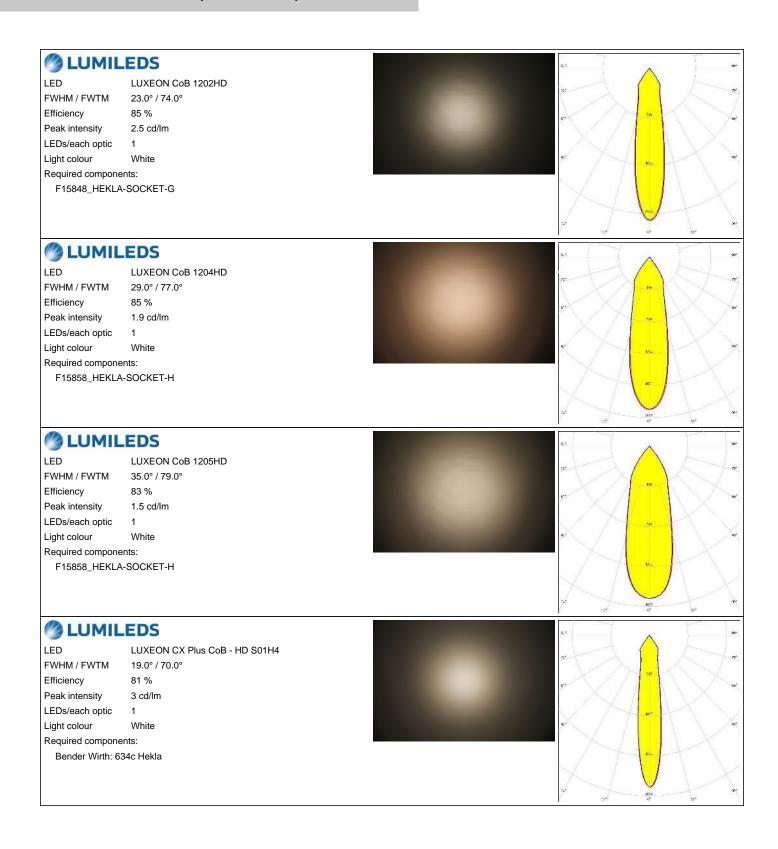



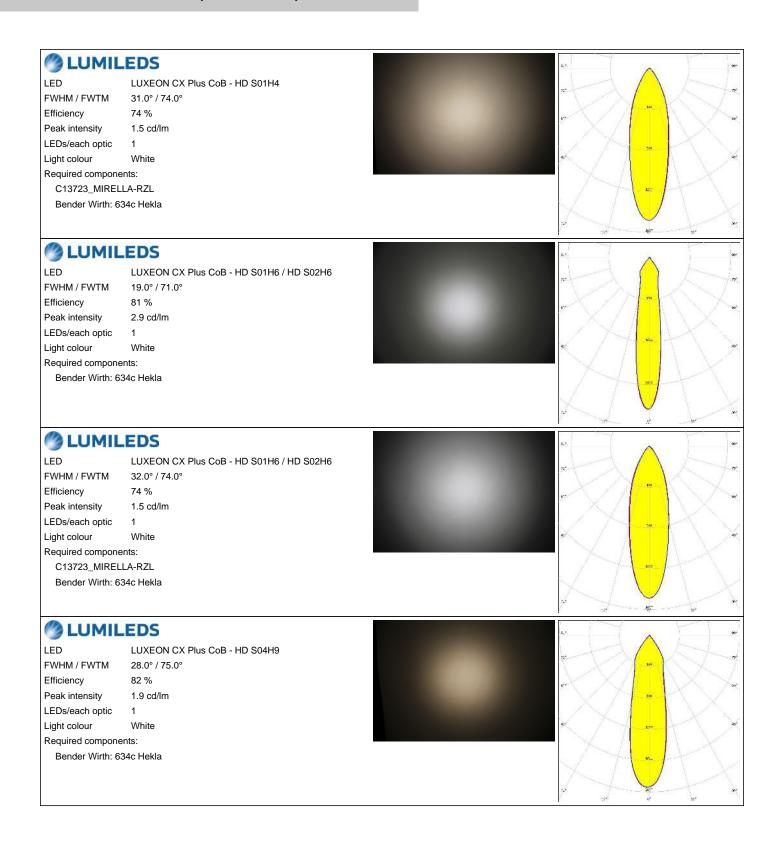




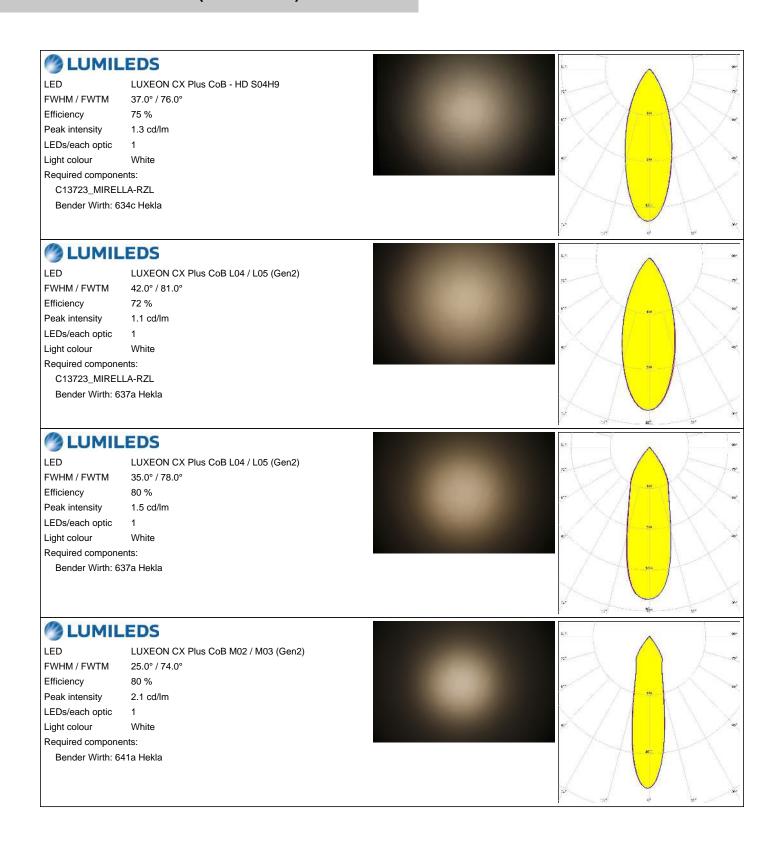


Published: 11/07/2019



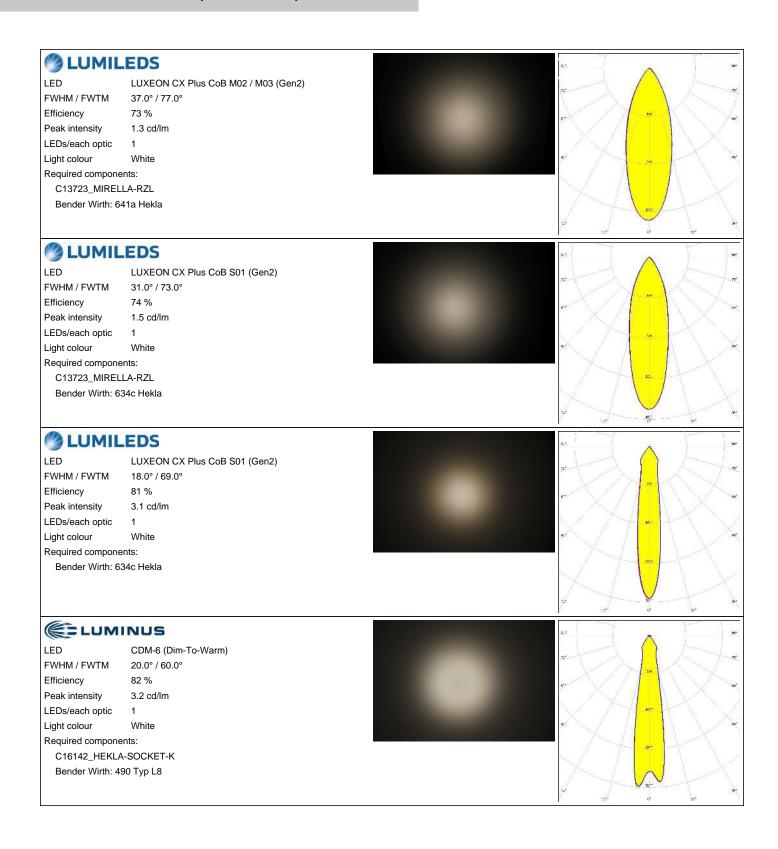




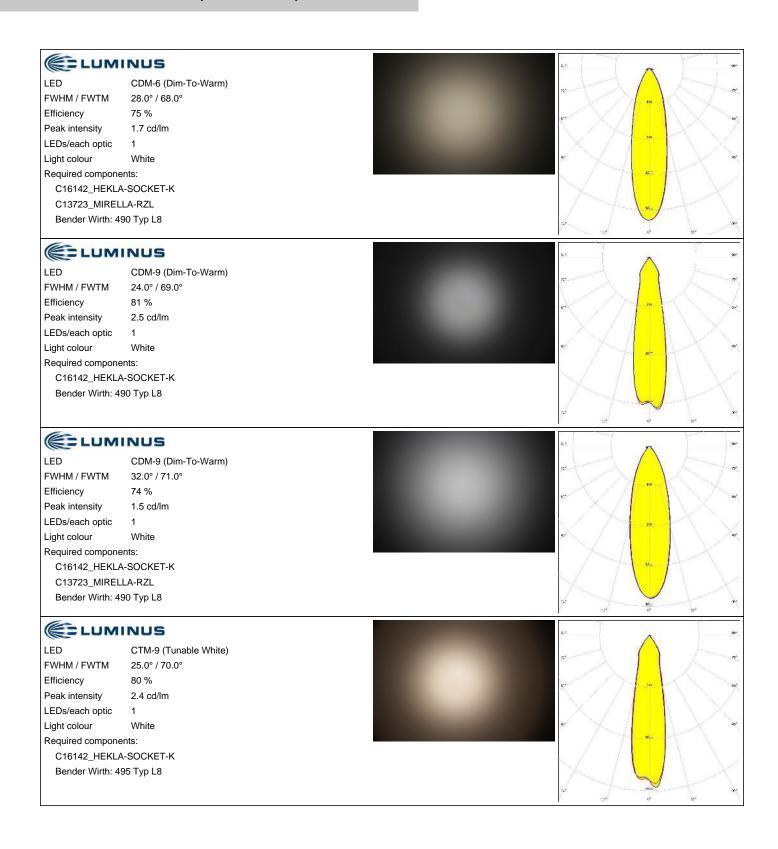


Published: 11/07/2019




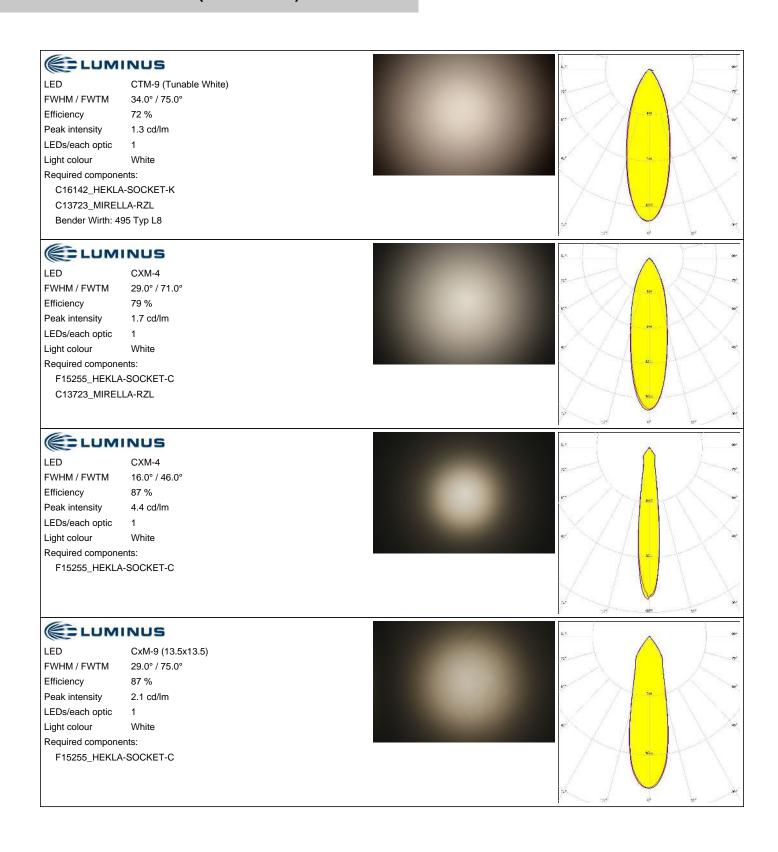



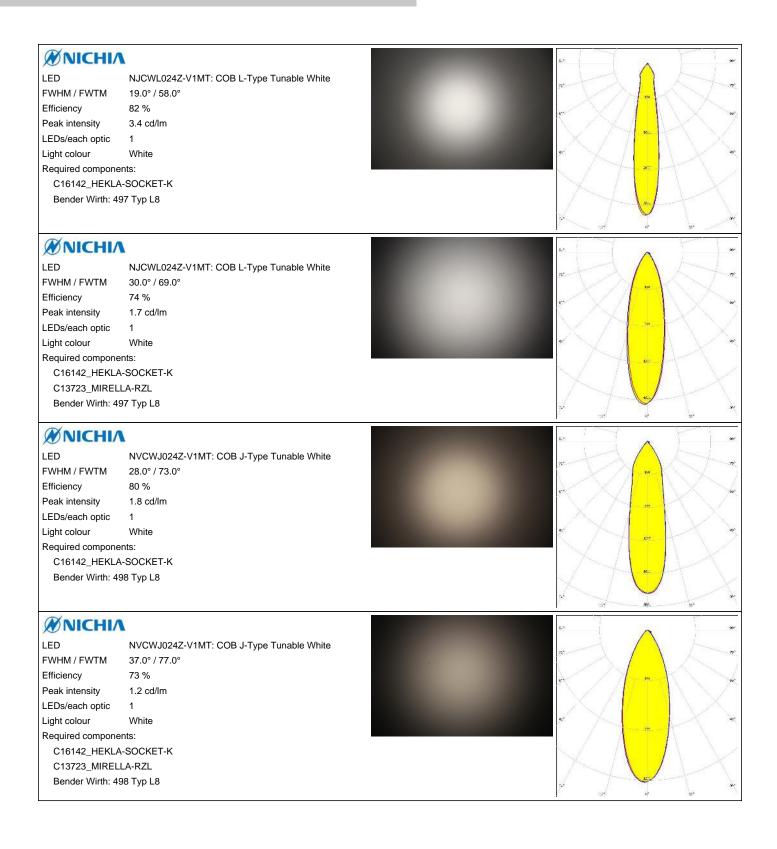



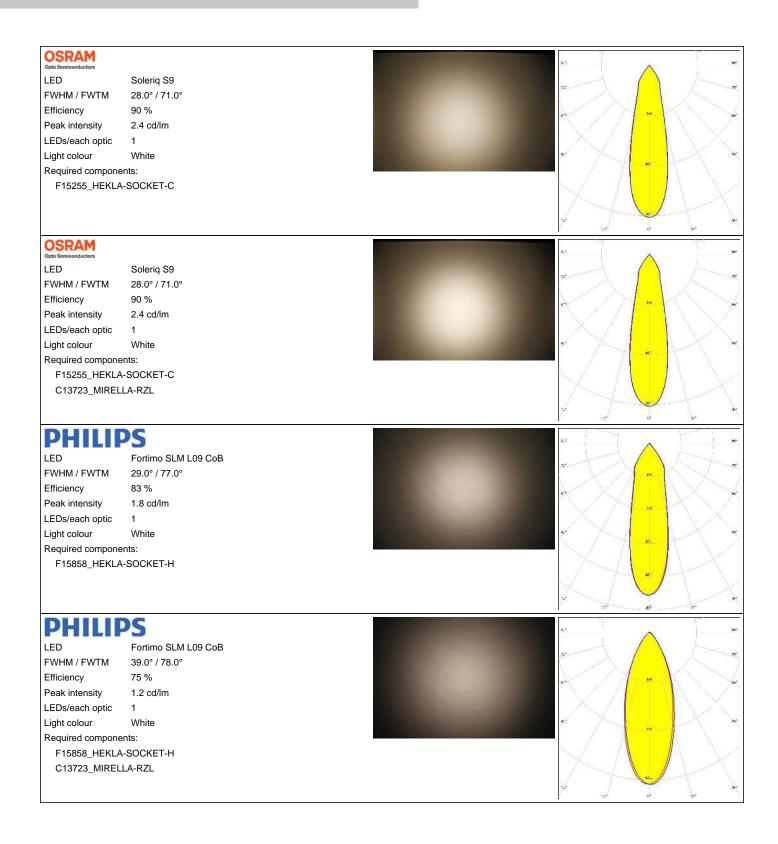




#### PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 45.0° / 82.0°
Efficiency 71 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142\_HEKLA-SOCKET-K C13723\_MIRELLA-RZL Bender Wirth: 432 Typ L8

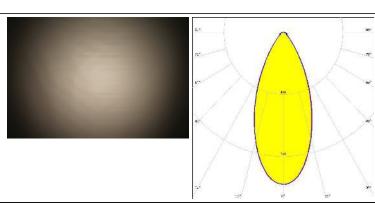

#### PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 45.0° / 82.0°
Efficiency 71 %
Peak intensity 1 cd/lm
LEDs/each optic 1

Light colour White Required components:

C16142\_HEKLA-SOCKET-K C13723\_MIRELLA-RZL Bender Wirth: 432 Typ L8



# PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 40.0° / 80.0° Efficiency 77 % Peak intensity 1.2 cd/lm

LEDs/each optic 1
Light colour White
Required components:
C16142\_HEKLA-SOCKET-K

Bender Wirth: 432 Typ L8



# **PHILIPS**

LED Fortimo SLM L13 CoB

FWHM / FWTM 40.0° / 80.0°


Efficiency 77 %

Peak intensity 1.2 cd/lm

LEDs/each optic 1

Light colour White


Required components: C16142\_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8

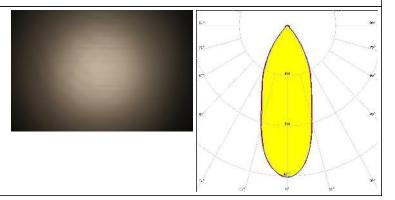

Published: 11/07/2019



## SAMSUNG LC010C G2 FWHM / FWTM 19.0° / 65.0° Efficiency 86 % Peak intensity 3.4 cd/lm LEDs/each optic Light colour White Required components: F15255\_HEKLA-SOCKET-C

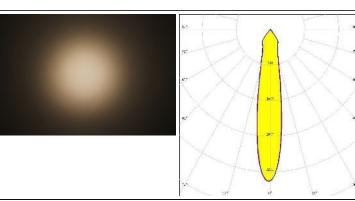


LC010T (Tunable White) LED

FWHM / FWTM 26.0° / 72.0° Efficiency 81 % Peak intensity 2.2 cd/lm LEDs/each optic 1

Tunable White Light colour

Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8

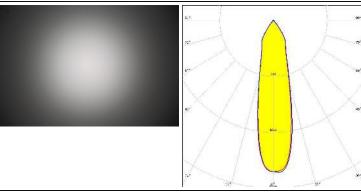


# SAMSUNG

LED LC010T (Tunable White)

FWHM / FWTM 27.0° / 69.0° Efficiency 76 % Peak intensity 2 cd/lm LEDs/each optic Light colour White Required components:

C16142\_HEKLA-SOCKET-K C14658\_BARBARA-RZ-LENS Bender Wirth: 501 Typ L8

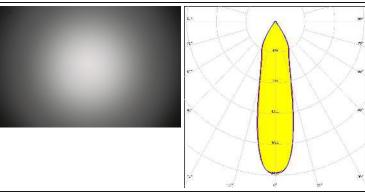


# SAMSUNG

LC016D / LC019D / LC026D / LC033D


FWHM / FWTM 47.0° / 79.0° Efficiency 79 % Peak intensity 1.2 cd/lm LEDs/each optic White Light colour Required components:

C15570\_LENA-STD-BASE2-VERO13-18


C13333\_MIRELLA-CL

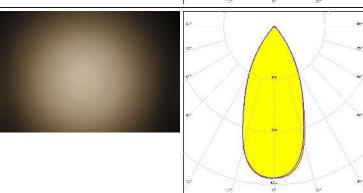




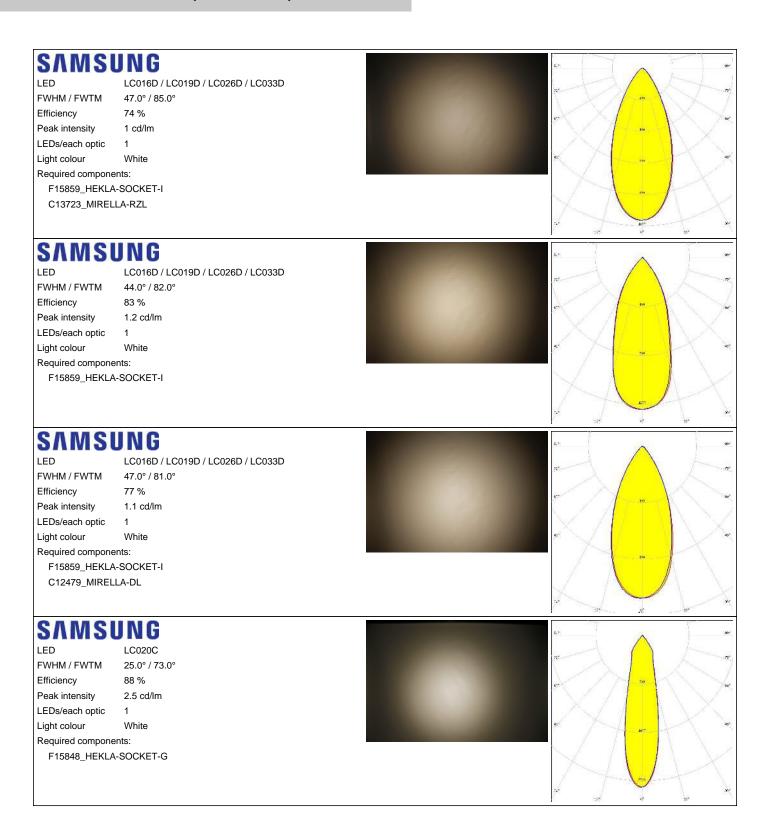




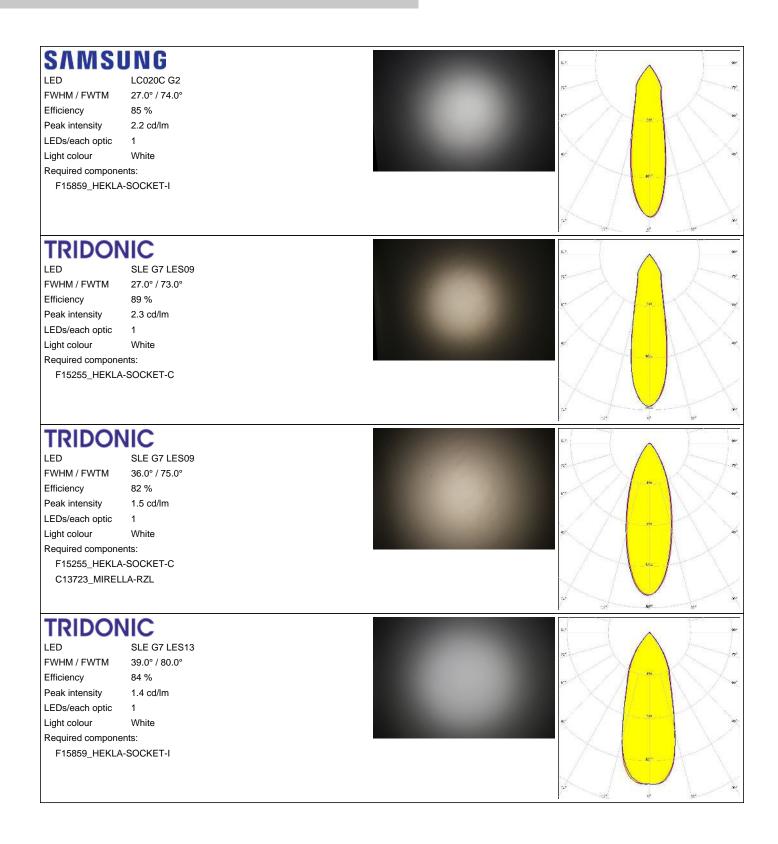



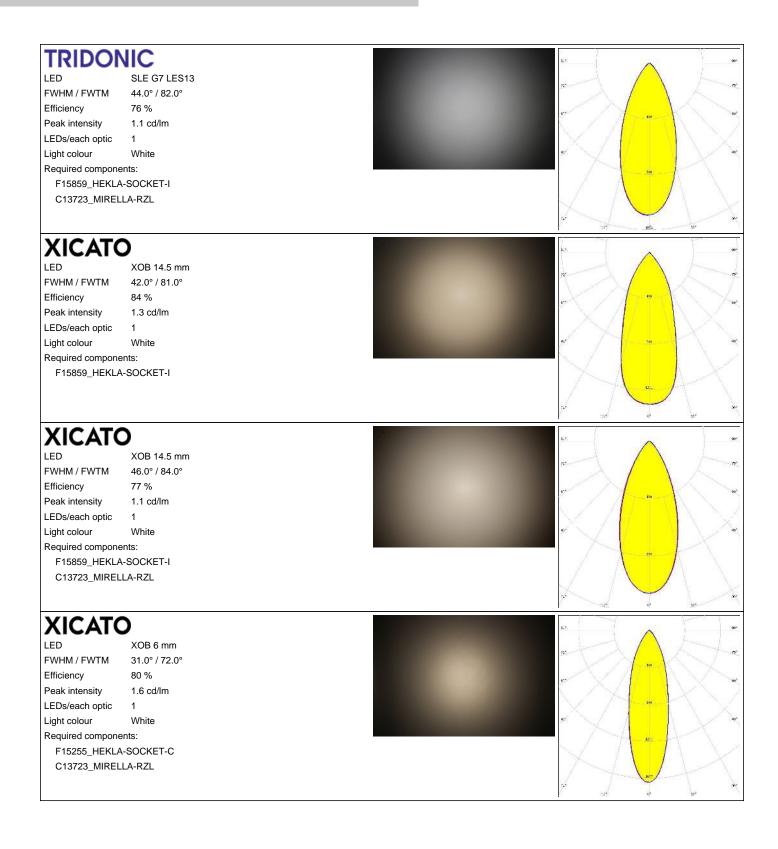



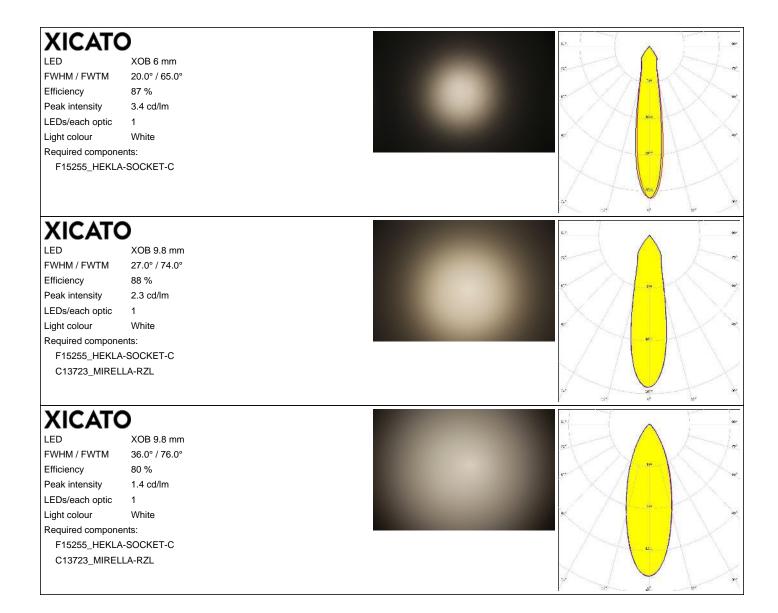

24/26



## **OPTICAL RESULTS (SIMULATED):**


# **CITIZEN**

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 27.3° / 65.3°
Efficiency 87 %
Peak intensity 2.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255\_HEKLA-SOCKET-C




#### **MUMILEDS**

LED LUXEON M/MX FWHM / FWTM 20.0° / 41.0°

Efficiency 89 %
Peak intensity 4.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255\_HEKLA-SOCKET-C




#### **WNICHIA**

LED COB L-Type (LES 11)

FWHM / FWTM 32.0° / 71.0°
Efficiency 88 %
Peak intensity 2.1 cd/lm

LEDs/each optic 1
Light colour White

Required components: F15858\_HEKLA-SOCKET-H




#### **WNICHIA**

LED COB T-Type FWHM / FWTM 21.0° / 43.0°

Efficiency 88 %
Peak intensity 4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15848\_HEKLA-SOCKET-G



Published: 11/07/2019



# PRODUCT DATASHEET F15559\_MIRELLA-G2-M

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

# Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

# Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

26/26

www.ledil.com/ where\_to\_buy