

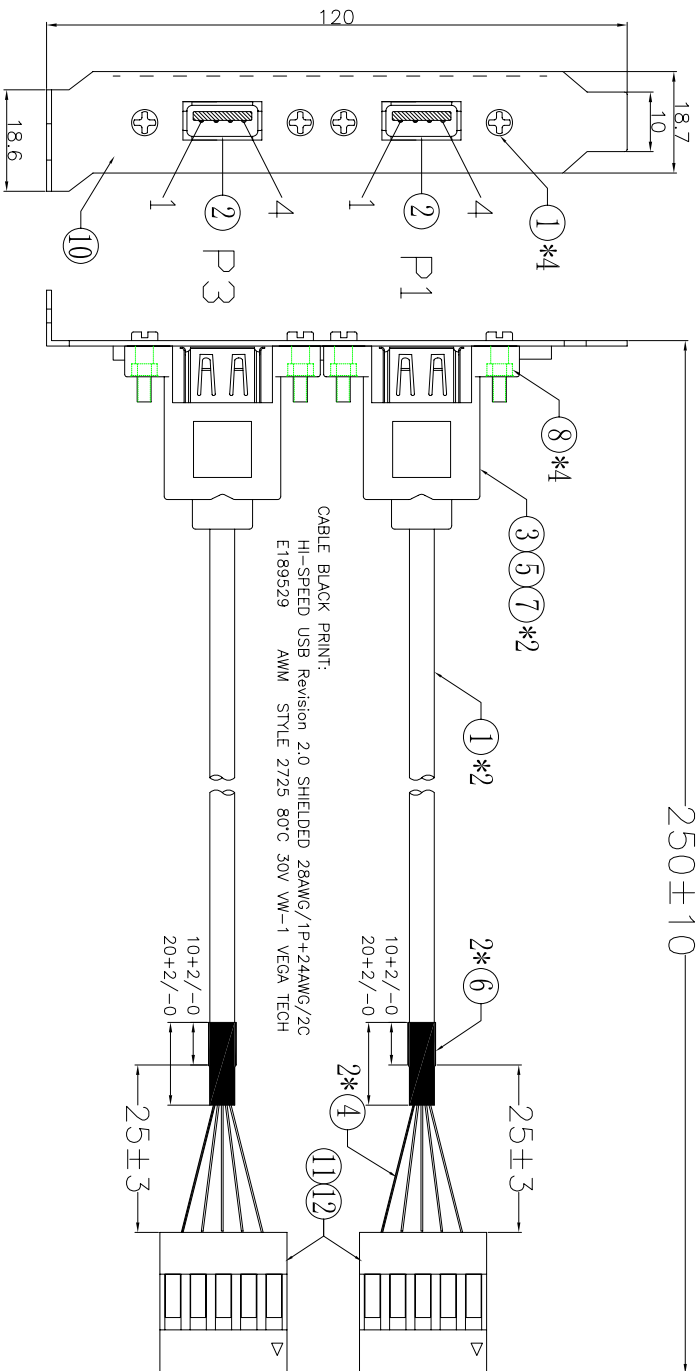


UNIT:MM

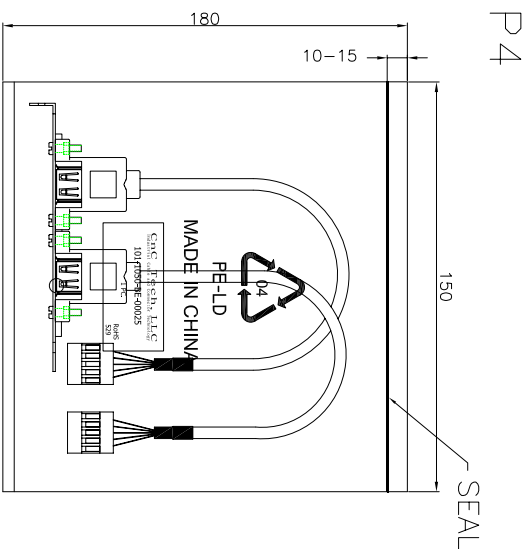

- Electronic Test:
- 1.100% Test,(Open,Short,Miss Wire)
  - 2.Contact Resistance:5 ohm max.
  - 3.Insulation Resistance:5M ohm min.
  - 4.Hi-Pot:300V DC/10ms

Pin Assignment

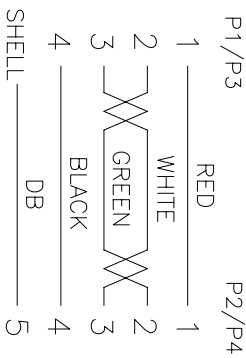

⑭	PE BAG	1/10	CLEAR SIZE:280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"印生产周期,有透气孔.
⑬	PE BAG	1	CLEAR SIZE:150*180*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"印生产周期,有透气孔.
⑫	TERMINAL	10	杜邦TER PH2.54mm MATERIAL:BRASS GF GRIMP TYPE
⑪	HSG	2	杜邦 HSG 1*SP PH:2.54mm INSULATOR COLOR:BLACK
⑩	BRACKET	1	BRACKET W/USB A-F DOUBLE NICKEL PLATED
⑨	SCREW	4	SCREW:2.8*14.1mm #4-40UNC NICKEL PLATED
⑧	NUT	4	HEX-NUT:4.75*1.65mm #4-40UNC NICKEL PLATED
⑦	IN JACKET	3.89	INNER MOID:CLEAR LDPE(邦福模具:US-Q31 内)
⑥	TUBE	2	H.S.T OD:5.0mm .L=20mm,COLOR BLACK
⑤	TUBE	2	H.S.T OD:0.8mm .L=8mm,COLOR BLACK
④	TUBE	2	H.S.T OD:0.8mm .L=30mm,COLOR BLACK
③	OUT JACKET	21.5g	OUTER WOLD:40P PVC COLOR:BEIGE(V-29#)(邦福模具:US-Q31 外)
②	CONN	2	USB A/F SOLDER TYPE INSULATION WHITE PIN G/F,SHELL-NI PLATED 矮身 (CHINSBAP74)
①	CABLE	2	USB2.0 UL2725 28AWG*1P+24AWG*2C+AL/MY+DW+BD+JACKET COLOR:BEIGE(V-29#) OD:4.7±0.15mm L=235±5/-0mm.

SPECIFICATION

CNC Tech, LLC		Industrial Cable and Connector Technology	
DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	101-1050-BE-00025
DECIDE BY		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	