
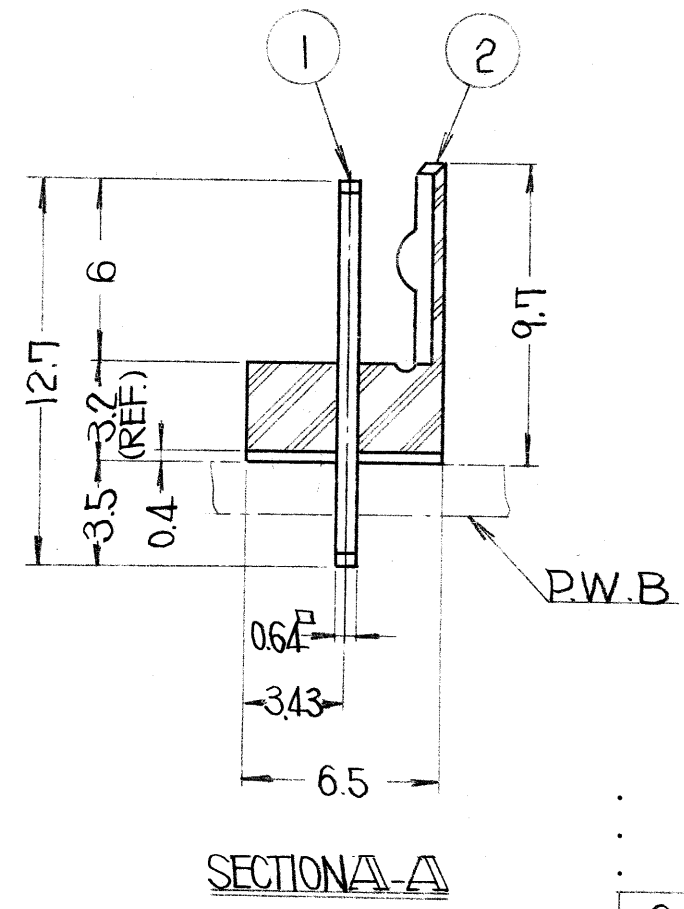


DWG. NO. SJ015093-E
 SYM. 1

SYM. DCN NO. DESCRIPTION DATE DRAWN CHECKED APP'D APP'D

TABLE-1

NO. OF CONTACTS	DIM.	A±0.5	B±0.25	C±0.3	D+0.3
2		5.5	2.5	2	1.5
3		8	5	3	2
4		10.5	7.5	4	2.5
5		13	10	5	3
6		15.5	12.5	6	3.5
7		18	15	6	6
8		20.5	17.5	6	8.5
9		23	20	6	11
10		25.5	22.5	6	13.5

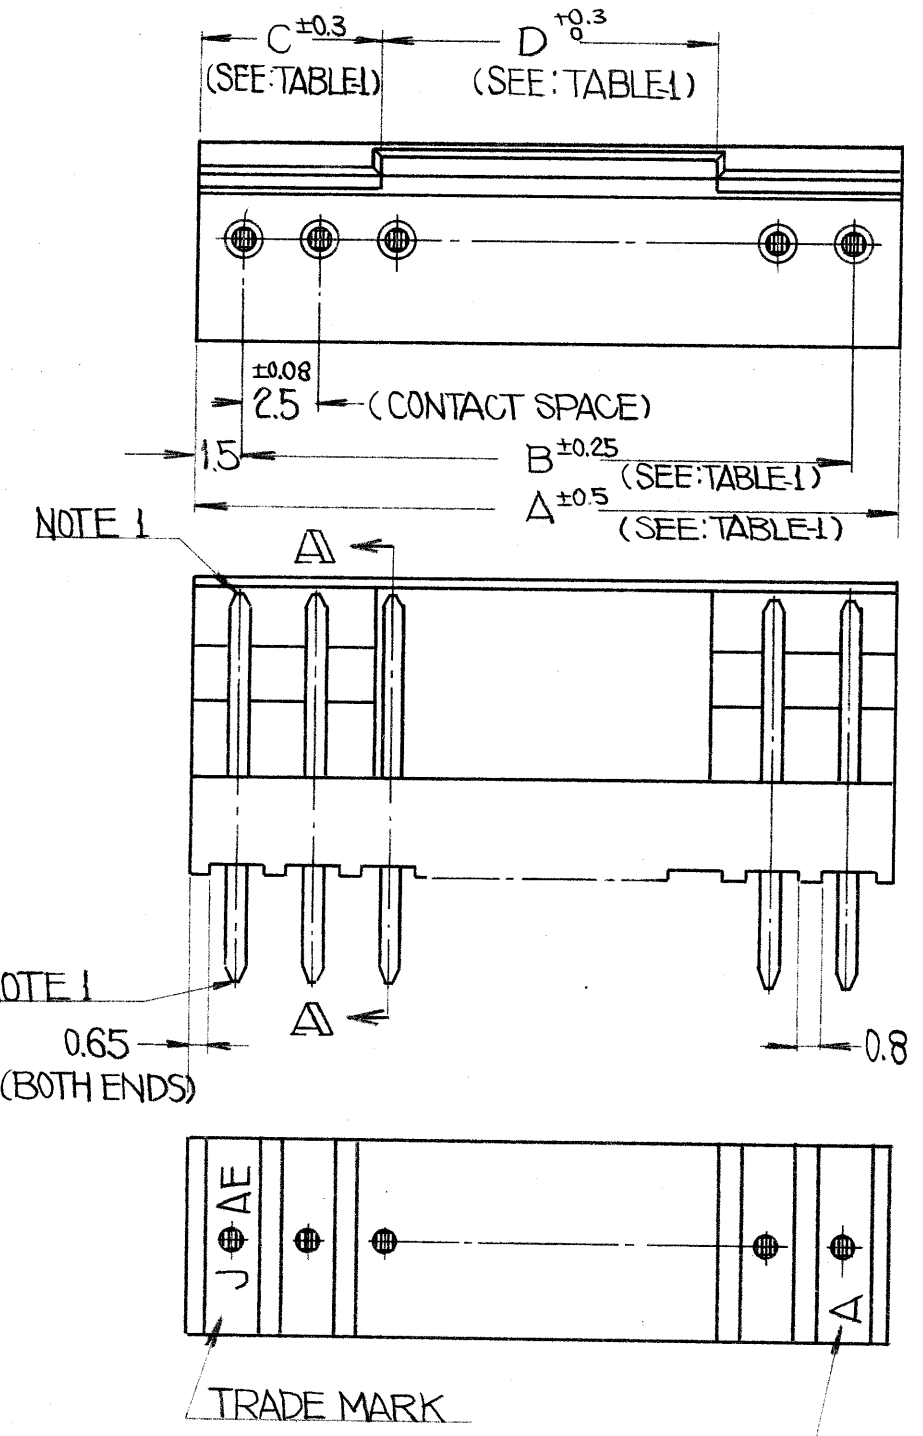

HOW TO ORDER

IL-***P-S3EN2-*(N)
 NEW TYPE (5-CONTACT ONLY)
 INSULATOR COLOR (STANDARD COLOR; LIGHT BROWN ISN'T SHOWN)
 THICKNESS OF APPLICABLE P.C BOARD (2:1.6~2.4 THICK)
 INSULATOR TYPE
 CONTACT TYPE
 CONTACT SPACING (25mm ONLY)
 CONTACT ROW (SINGLE ONLY)
 POST SIDE
 NO. OF CONTACTS (SEE TABLE 1)
 SERIES PREFIX

ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	PART NO.
2	INSULATOR	1	THERMOPLASTIC		
1	CONTACT	SEE:TABLE1	COPPER ALLOY	TIN OVER NICKEL	

NOTE 1. NO PLATING ON THESE AREAS.

APPLICATION	USED ON	QT'Y	REQ'D
NEXT ASS'Y	USED ON	NEXT ASS'Y	FINAL ASS'Y

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES ON:
 FRACTIONS | DECIMALS | ANGLES
 ±0.8 | .x | .xx | ±0.2

TREATMENT OR FINISH

DATE DEC. 1977
 DRAWN E. MURANO
 CHECKED H. Takeda
 APP'D T. SOMBI
 APP'D Joe Sauter

3rd Angle Drawing

TITLE STRIGHT PIN HEADER
 JAE-CONNECTOR.COM
 Reference Only
 IL-***P-S3EN2-*

IND. CO., LTD.
 FACTORY
 NAKAGAMI-CHO, AKISHIMA-SHI
 TOKYO, JAPAN

DWG. NO. SJ015093-E
 SHEET 1 OF 1

SCALE x 4
 DWG. SIZE B WT.