


SBN257



Flow meter with integrated backflow prevention and display

SBN32IF0FRKG

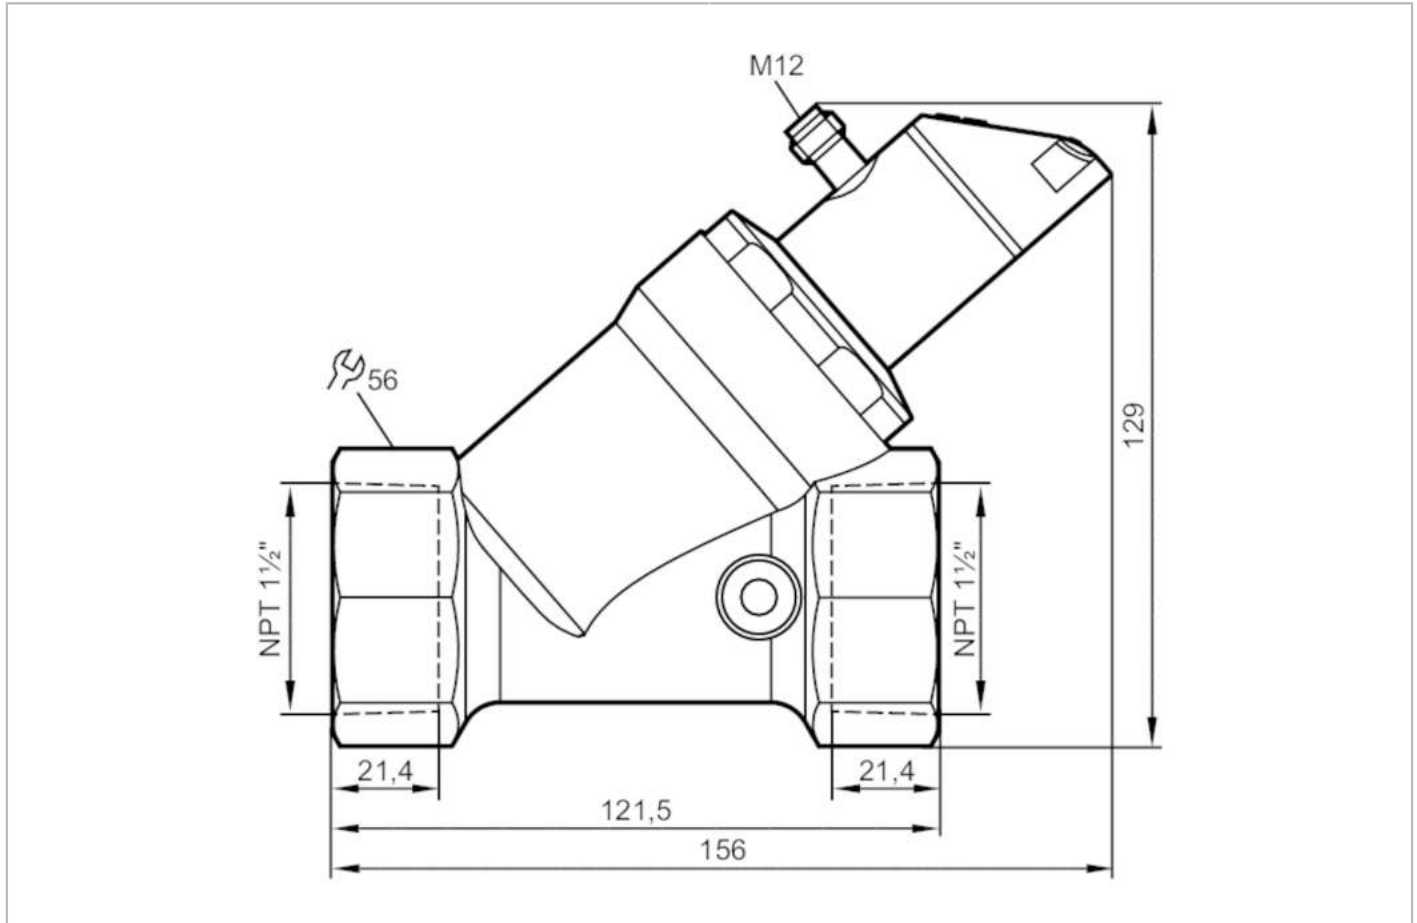

Product characteristics	
Number of inputs and outputs	Number of digital outputs: 2; Number of analogue outputs: 1
Measuring range	60...3000 gph 1...50 gpm
Process connection	threaded connection 1 1/2" NPT
Application	
Special feature	Gold-plated contacts
Application	for industrial applications
Media	Liquids; water; glycol solutions; coolants
Note on media	oil 1 with viscosity: 10 mm ² /s (104 °F) oil 2 with viscosity: 46 mm ² /s (104 °F)
Medium temperature [°F]	14...212
Pressure rating [bar]	25
Pressure rating [Mpa]	2.5
MAWP (for applications according to CRN) [bar]	25
Electrical data	
Operating voltage [V]	18...30 DC; (to SELV/PELV)
Current consumption [mA]	< 50
Protection class	III
Reverse polarity protection	yes



Flow meter with integrated backflow prevention and display

SBN32IF0FRKG

Power-on delay time [s] < 3

Inputs / outputs

Number of inputs and outputs Number of digital outputs: 2; Number of analogue outputs: 1

Outputs

Total number of outputs	2
Output signal	switching signal; analogue signal; frequency signal; IO-Link; (configurable)
Number of digital outputs	2
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC [V]	2
Permanent current rating of switching output DC [mA]	150; (per output 2 x 200 (...140 °F); 2 x 250 (...104 °F))
Switching cycles (mechanical)	10 million
Number of analogue outputs	1
Analogue current output [mA]	4...20
Max. load [Ω]	500
Short-circuit protection	yes
Overload protection	yes
Frequency of the output [Hz]	0...10000

Measuring/setting range

Measuring range	60...3000 gph	1...50 gpm
Display range	0...3600 gph	0...60 gpm
Resolution	20 gph	0.2 gpm
Set point SP	20...3000 gph	0.4...50 gpm
Reset point rP	0...2980 gph	0...49.6 gpm
Frequency end point, FEP	200...3000 gph	3.4...50 gpm
In steps of	20 gph	0.2 gpm
Frequency at the end point FRP [Hz]		10...10000
Measuring dynamics		1:50

Temperature monitoring

Measuring range [°F]	14...212
Display range [°F]	-26...252
Resolution [°F]	2
Set point SP [°F]	16...212
Reset point rP [°F]	14...210
In steps of [°F]	2
Frequency start point, FSP [°F]	14...172
Frequency end point, FEP [°F]	54...212
Frequency at the end point FRP [Hz]	10...10000

Accuracy / deviations

Flow monitoring

Accuracy (in the measuring range) ± (4 % MW + 1 % MEW); (Q > 1 l/min; medium and operating temperature: +71,6 °F ± 4K)



Flow meter with integrated backflow prevention and display

SBN32IF0FRKG

Repeatability	± 1 % MEW	
Temperature monitoring		
Temperature drift	0,9802 °F / K	
Accuracy [K]	3 K (77 °F; Q > 1 l/min)	
Response times		
Flow monitoring		
Response time [s]	0.01	
Damping process value dAP [s]	0...5	
Damping for the analogue output dAA [s]	0...5	
Temperature monitoring		
Dynamic response T05 / T09 [s]	T09 = 120 (Q > 1 l/min)	
Software / programming		
Parameter setting options	hysteresis / window; normally open / normally closed; switching logic; current output; medium selection; damping for the switching output / analogue output; display can be rotated and switched off; standard unit of measurement; process value colour	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	
Profiles	Smart Sensor: Process Data Variable; Device Identification	
SIO mode	yes	
Required master port type	A	
Process data analogue	2	
Process data binary	2	
Min. process cycle time [ms]	5	
Supported DeviceIDs	Type of operation	DeviceID
	Default	680
Operating conditions		
Ambient temperature [°F]	32...140	
Note on ambient temperature	medium temperature < 176 °F medium temperature < 212 °F: 32...104 °F	
Storage temperature [°F]	5...176	
Protection	IP 65; IP 67	
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
UL approval	UL Approval no.	I007
Pressure Equipment Directive	Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data		
Weight [g]	2258.35	

SBN257



Flow meter with integrated backflow prevention and display

SBN32IF0FRKG

Materials	stainless steel (1.4404 / 316L); PBT+PC-GF30; PBT-GF20; PC; brass chemically nickel-plated
Materials (wetted parts)	stainless steel (316 / 1.4401); stainless steel (1.4404 / 316L); brass (2.0371); brass chemically nickel-plated; PPS; O-ring: FKM
Process connection	threaded connection 1 1/2" NPT

Displays / operating elements

Display	Display unit	3 x LED, green
	switching status	2 x LED, yellow
	measured values	alphanumeric display, red/green 4-digit
	programming	alphanumeric display, 4-digit

Remarks

Remarks	Recommendation: use a 200-micron filter.
	All data refer to water (68 °F).
	MW = measured value
	MEW = Final value of the measuring range
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated






Flow meter with integrated backflow prevention and display

SBN32IF0FRKG

Connection

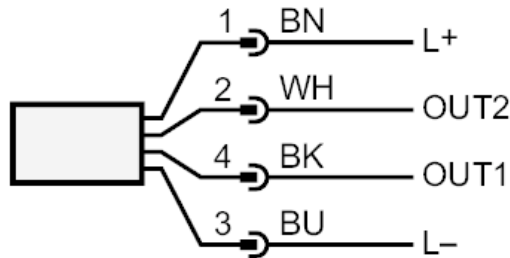

OUT1:

- switching output volumetric flow quantity monitoring
- switching output Temperature monitoring
- frequency output volumetric flow quantity monitoring
- frequency output Temperature monitoring
- IO-Link

OUT2:

- switching output volumetric flow quantity monitoring
- switching output Temperature monitoring
- analogue output volumetric flow quantity monitoring
- analogue output Temperature monitoring


colours to DIN EN 60947-5-2

Core colours :

- BK = black
- BN = brown
- BU = blue
- WH = white

Diagrams and graphs

Pressure loss

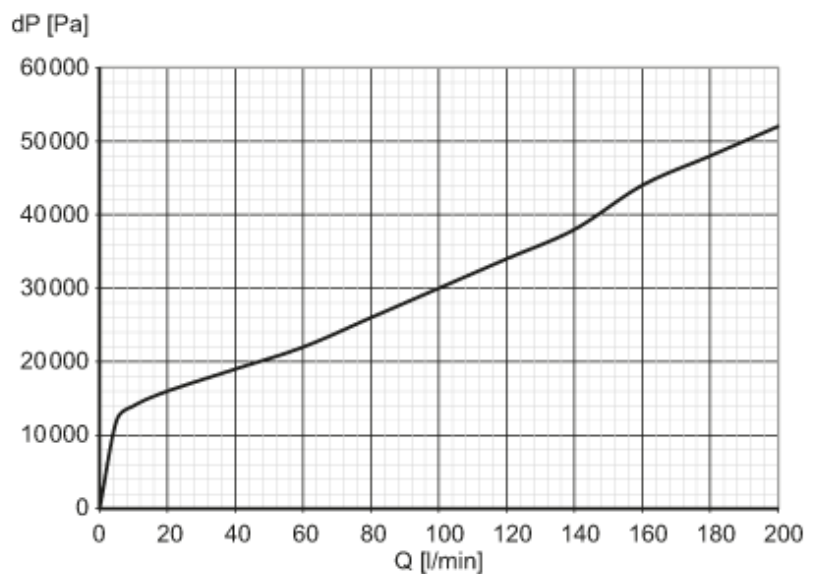

dP Pressure loss

Q volumetric flow quantity