
36946-2 - ACTIVE

SOLISTRAND

TE Internal #: 36946-2 Splices, Parallel Splice, 0 AWG Wire Size, 41 – 60 mm² Wire Size, Serrated, .444 in [11.28 mm] Barrel Inside Diameter, 83700 – 119500 CMA Wire Size

View on TE.com >

Terminals & Splices > Splices

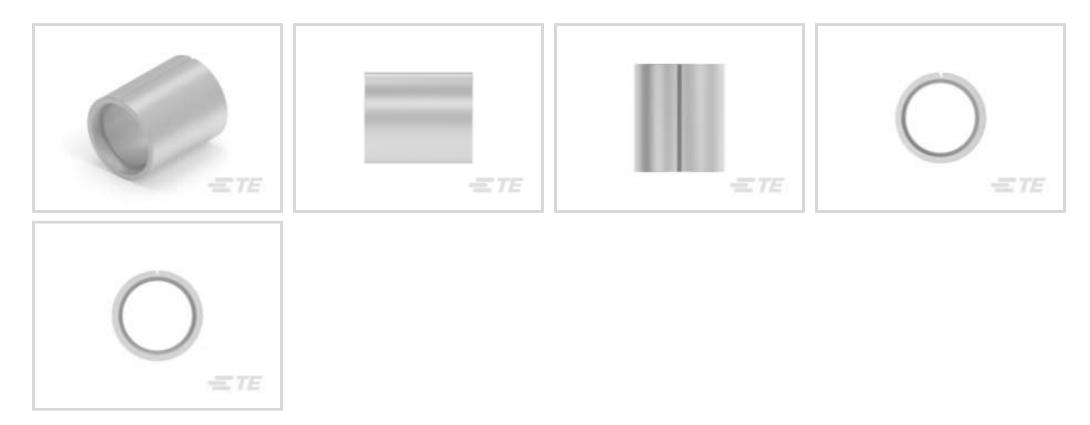

Wire Size: 41 – 60 mm²

Sealable: No

Splice Features: Serrated

Barrel Inside Diameter: 11.28 mm [.444 in]

Features

Product Type Features



Splice Accessory Type	Splice
Sealable	No
Splice Type	Parallel Splice
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Body Features Splice Features	Serrated
-	Serrated
Splice Features	Serrated 100 µin
Splice Features	
Splice Features Contact Features	100 µin

36946-2

Splices, Parallel Splice, 0 AWG Wire Size, 41 – 60 mm² Wire Size, Serrated, .444 in [11.28 mm] Barrel Inside Diameter, 83700 – 119500 CMA Wire Size



Mechanical Attachment

Wire Insulation Support	Without
Dimensions	
Wire Size	83700 – 119500 CMA
Barrel Inside Diameter	11.28 mm[.444 in]
Terminal Material Thickness	1.78 mm[.07 in]
Product Length	18064 mm[.734 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	100
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Pb (40% in Component part) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

36946-2

Splices, Parallel Splice, 0 AWG Wire Size, 41 – 60 mm² Wire Size, Serrated, .444 in [11.28 mm] Barrel Inside Diameter, 83700 – 119500 CMA Wire Size




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought

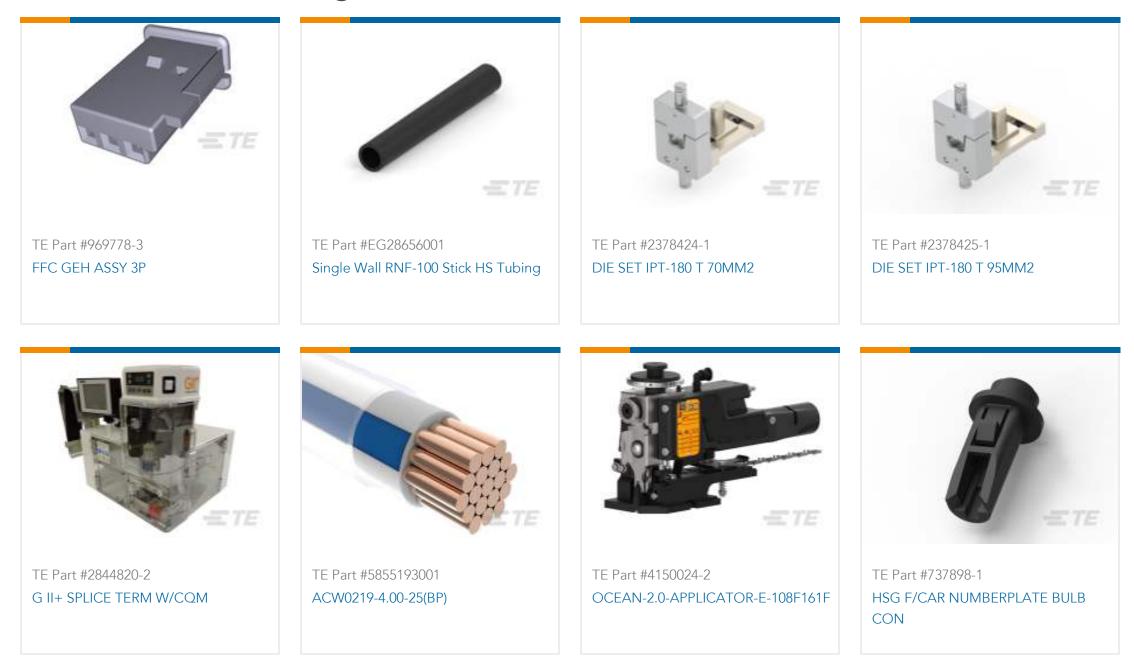

Documents

Product Drawings SOLIS, PARA 1/0 60/40 SN-PB

English

36946-2

Splices, Parallel Splice, 0 AWG Wire Size, 41 – 60 mm² Wire Size, Serrated, .444 in [11.28 mm] Barrel Inside Diameter, 83700 – 119500 CMA Wire Size



CAD Files Customer View Model ENG_CVM_CVM_36946-2_S.2d_dxf.zip English 3D PDF 3D Customer View Model ENG_CVM_CVM_36946-2_S.3d_igs.zip English Customer View Model ENG_CVM_CVM_36946-2_S.3d_stp.zip

Datasheets & Catalog Pages SOLISTRAND - QRG

English