


1	2	3	4	5	6	7
---	---	---	---	---	---	---


A A XX-LC-TT

CKT: 06, 08, 14, 16, 18, 20

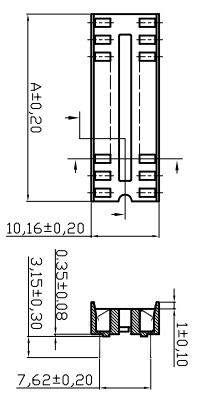


A A XX-LC/7-T

CKT: 24, 28, 32, 40



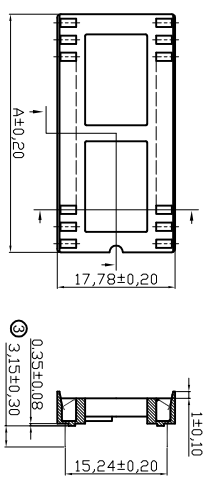


A A XX-LC/7-T




CKT: 24, 28

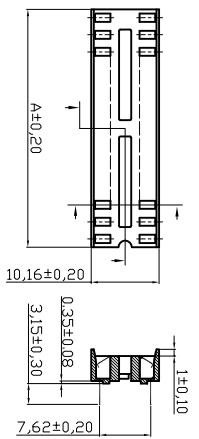

C

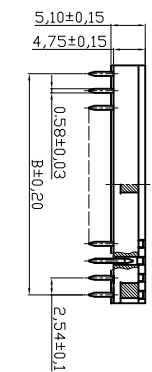

D



E

CKT	A±0.20	B±0.20
06	7.62	5.08
08	10.16	7.62
14	17.78	15.24
16	20.32	17.78
18	22.86	20.32
20	25.40	22.86

CKT	A±0.20	B±0.20
24	30.48	27.94
28	35.56	33.02
32	40.64	38.10
40	50.80	48.26

CKT	A±0.20	B±0.20
24	30.48	27.94
28	35.56	33.02

MATERIAL:
 Contact : Phosphor- Bronze thickness 0.15mm
 Plating : Contact Plating, Tin plated 60u"~80u" (Lead free plating)
 Insulator : PBT-4830 , UL 94V-0

SPECIFICATIONS:
 Current Rating : 1A
 Dielectric withstanding Voltage : 1000V RMS/minute
 Insulator resistance : 5000 Megohms min.
 Contact resistance : 20 milliohms initial
 30 milliohms after test.
 Operating temperatures : -55°c to 85°c
 Insertion force : 340g(12 oz) max.per contact.
 Withdrawal force : 80g(2.82 oz) min.per contact
 Soldering temperature: +245° C , 5S max.

RoHS compliant
 Unit: mm

Scale	Free	Customer-No.	
TOLERANCE		Date	Name
X.	±X	Drawn	Hellwig
X.X	±X	Approved	Amy
X.XX	±X		
DIM	TOL		
X.°	±X°	21.07.2009	Dean
X.X°	±X°	24.03.1999	Hellwig
Angle	TOL		

Customer-No.	ASSMANN WSW-No.	Drawing-No.
	A XX-LC-TT	ASS 0810 CO
	A XX-LC/7-T	rev04
Replace	ASS 0333A CO	Sheet
	ASS 0333B CO	

1	2	3	4	5	6	7
---	---	---	---	---	---	---

