


LTR	DESCRIPTION	DATE	BY
-	Released	6/14/99	JCL

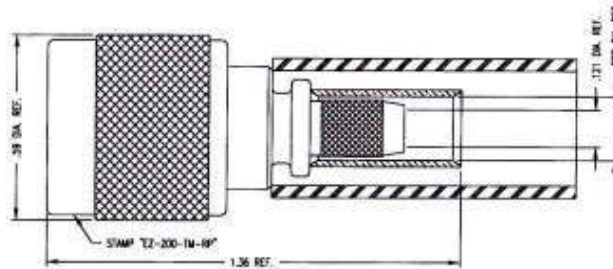

**I. MATERIALS & FINISHES**

- center contact: Gold Plated Beryllium Copper – female pin
- outer contact: Alballoy Plated Brass
- body: Alballoy Plated Brass
- coupling nut: Alballoy Plated Brass
- crimp sleeve: Alballoy Plated Copper
- dielectric: Teflon® PTFE
- gasket: Silicone Rubber
- shrink sleeve: Adhesive Lined Polyolefin
- crimp size: .213" hex (M22520/5-19)

**II. ELECTRICAL PROPERTIES**

- impedance: 50 ohms
- working voltage: 500 vrms (max)
- vswr: 1.25:1 (max) up to 3 GHz
- insertion loss: 0.1 x √Fghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JCL	6/14/99
Check		
Prj. Mgr.		
Prd. Mgr.		
QA Mgr.		



**TIMES MICROWAVE SYSTEMS**

Wallingford, CT 06492  
 (203) 949-8400; (203) 949-8423.Fax  
 www.timesmicrowave.com

**EZ-200-TM-RP**  
**Reverse Polarity TNC Male (female pin)**  
**for LMR-200 Cable**

Size A	CAGE CODE <b>68999</b>	Drawing No.: <b>3190-792</b>
--------	---------------------------	---------------------------------

Scale: NA

Rev. ( )

Sheet: 1 of 1