
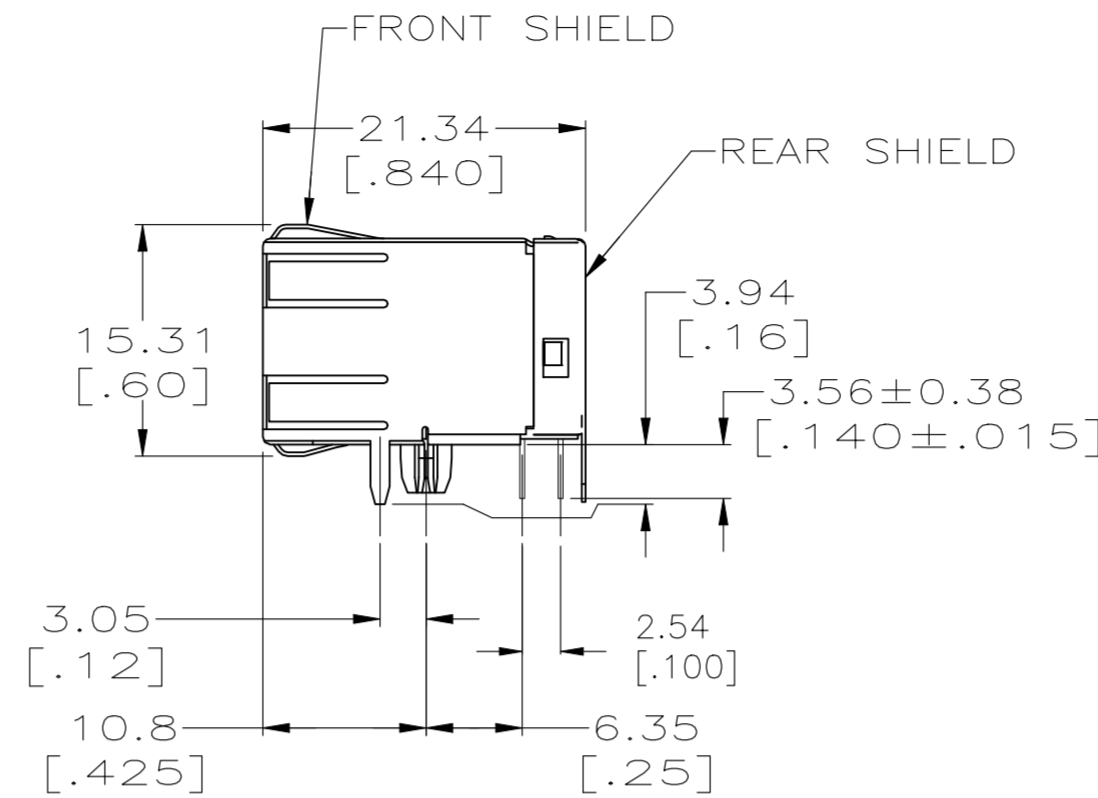



| REVISIONS | | | | | |
|-----------|-----|---------------|-----------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| C2 | | ECR-19-014657 | 13DEC2020 | RR | SZ |

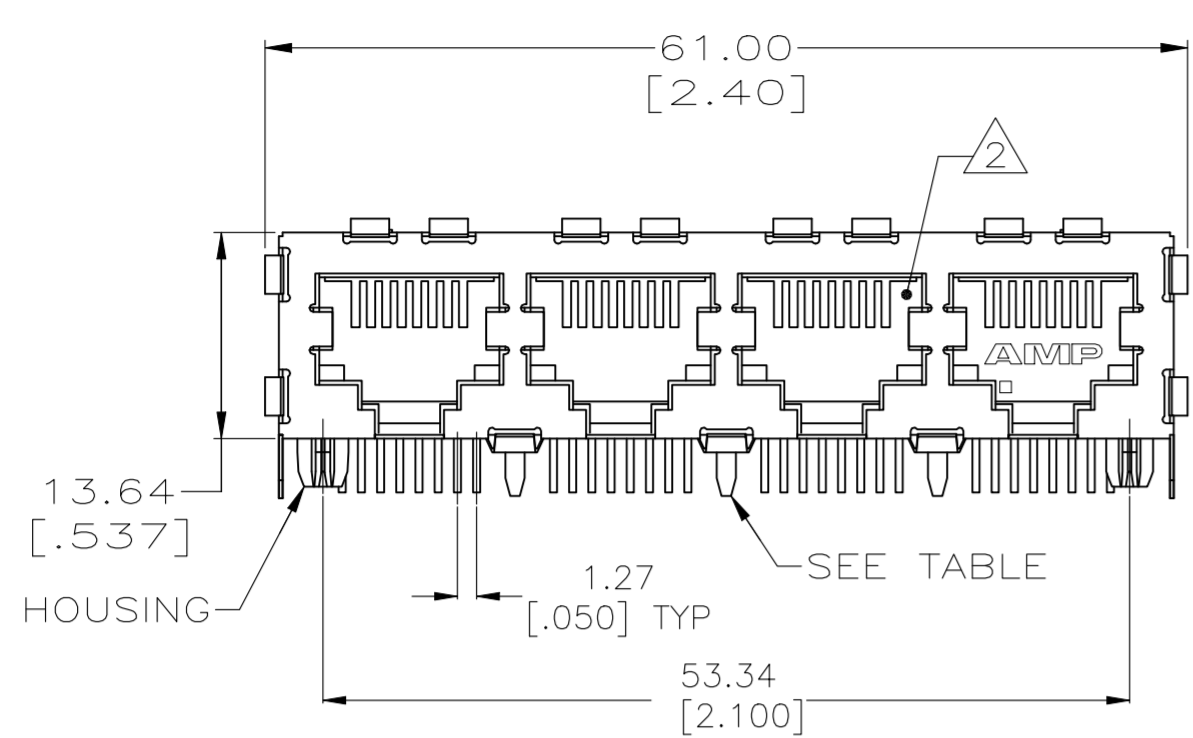

- MATERIAL:
 HOUSING - NYLON, COLOR: BLACK, UL 94V-0.
 OVERMOLDED TERMINAL ARRAY - PBT, BROWN.
 TERMINALS - 0.33[.013] THICK PHOS BRONZE PLATED WITH 1.27µm[.000050] MINIMUM HARD GOLD IN LOCALIZED AREA AND 3.81µm[.000150] MINIMUM MATTE TIN IN SOLDER AREA OVER 1.27µm[.000050] MINIMUM NICKEL UNDERPLATE.
 SHIELD - 0.254[.010] THICK COPPER ALLOY PLATED WITH 1.27µm[.000050] MINIMUM NICKEL AND 2.03µm[.000080] MINIMUM HOT TIN DIP ON PCB.
 GROUND TABS.

△ JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

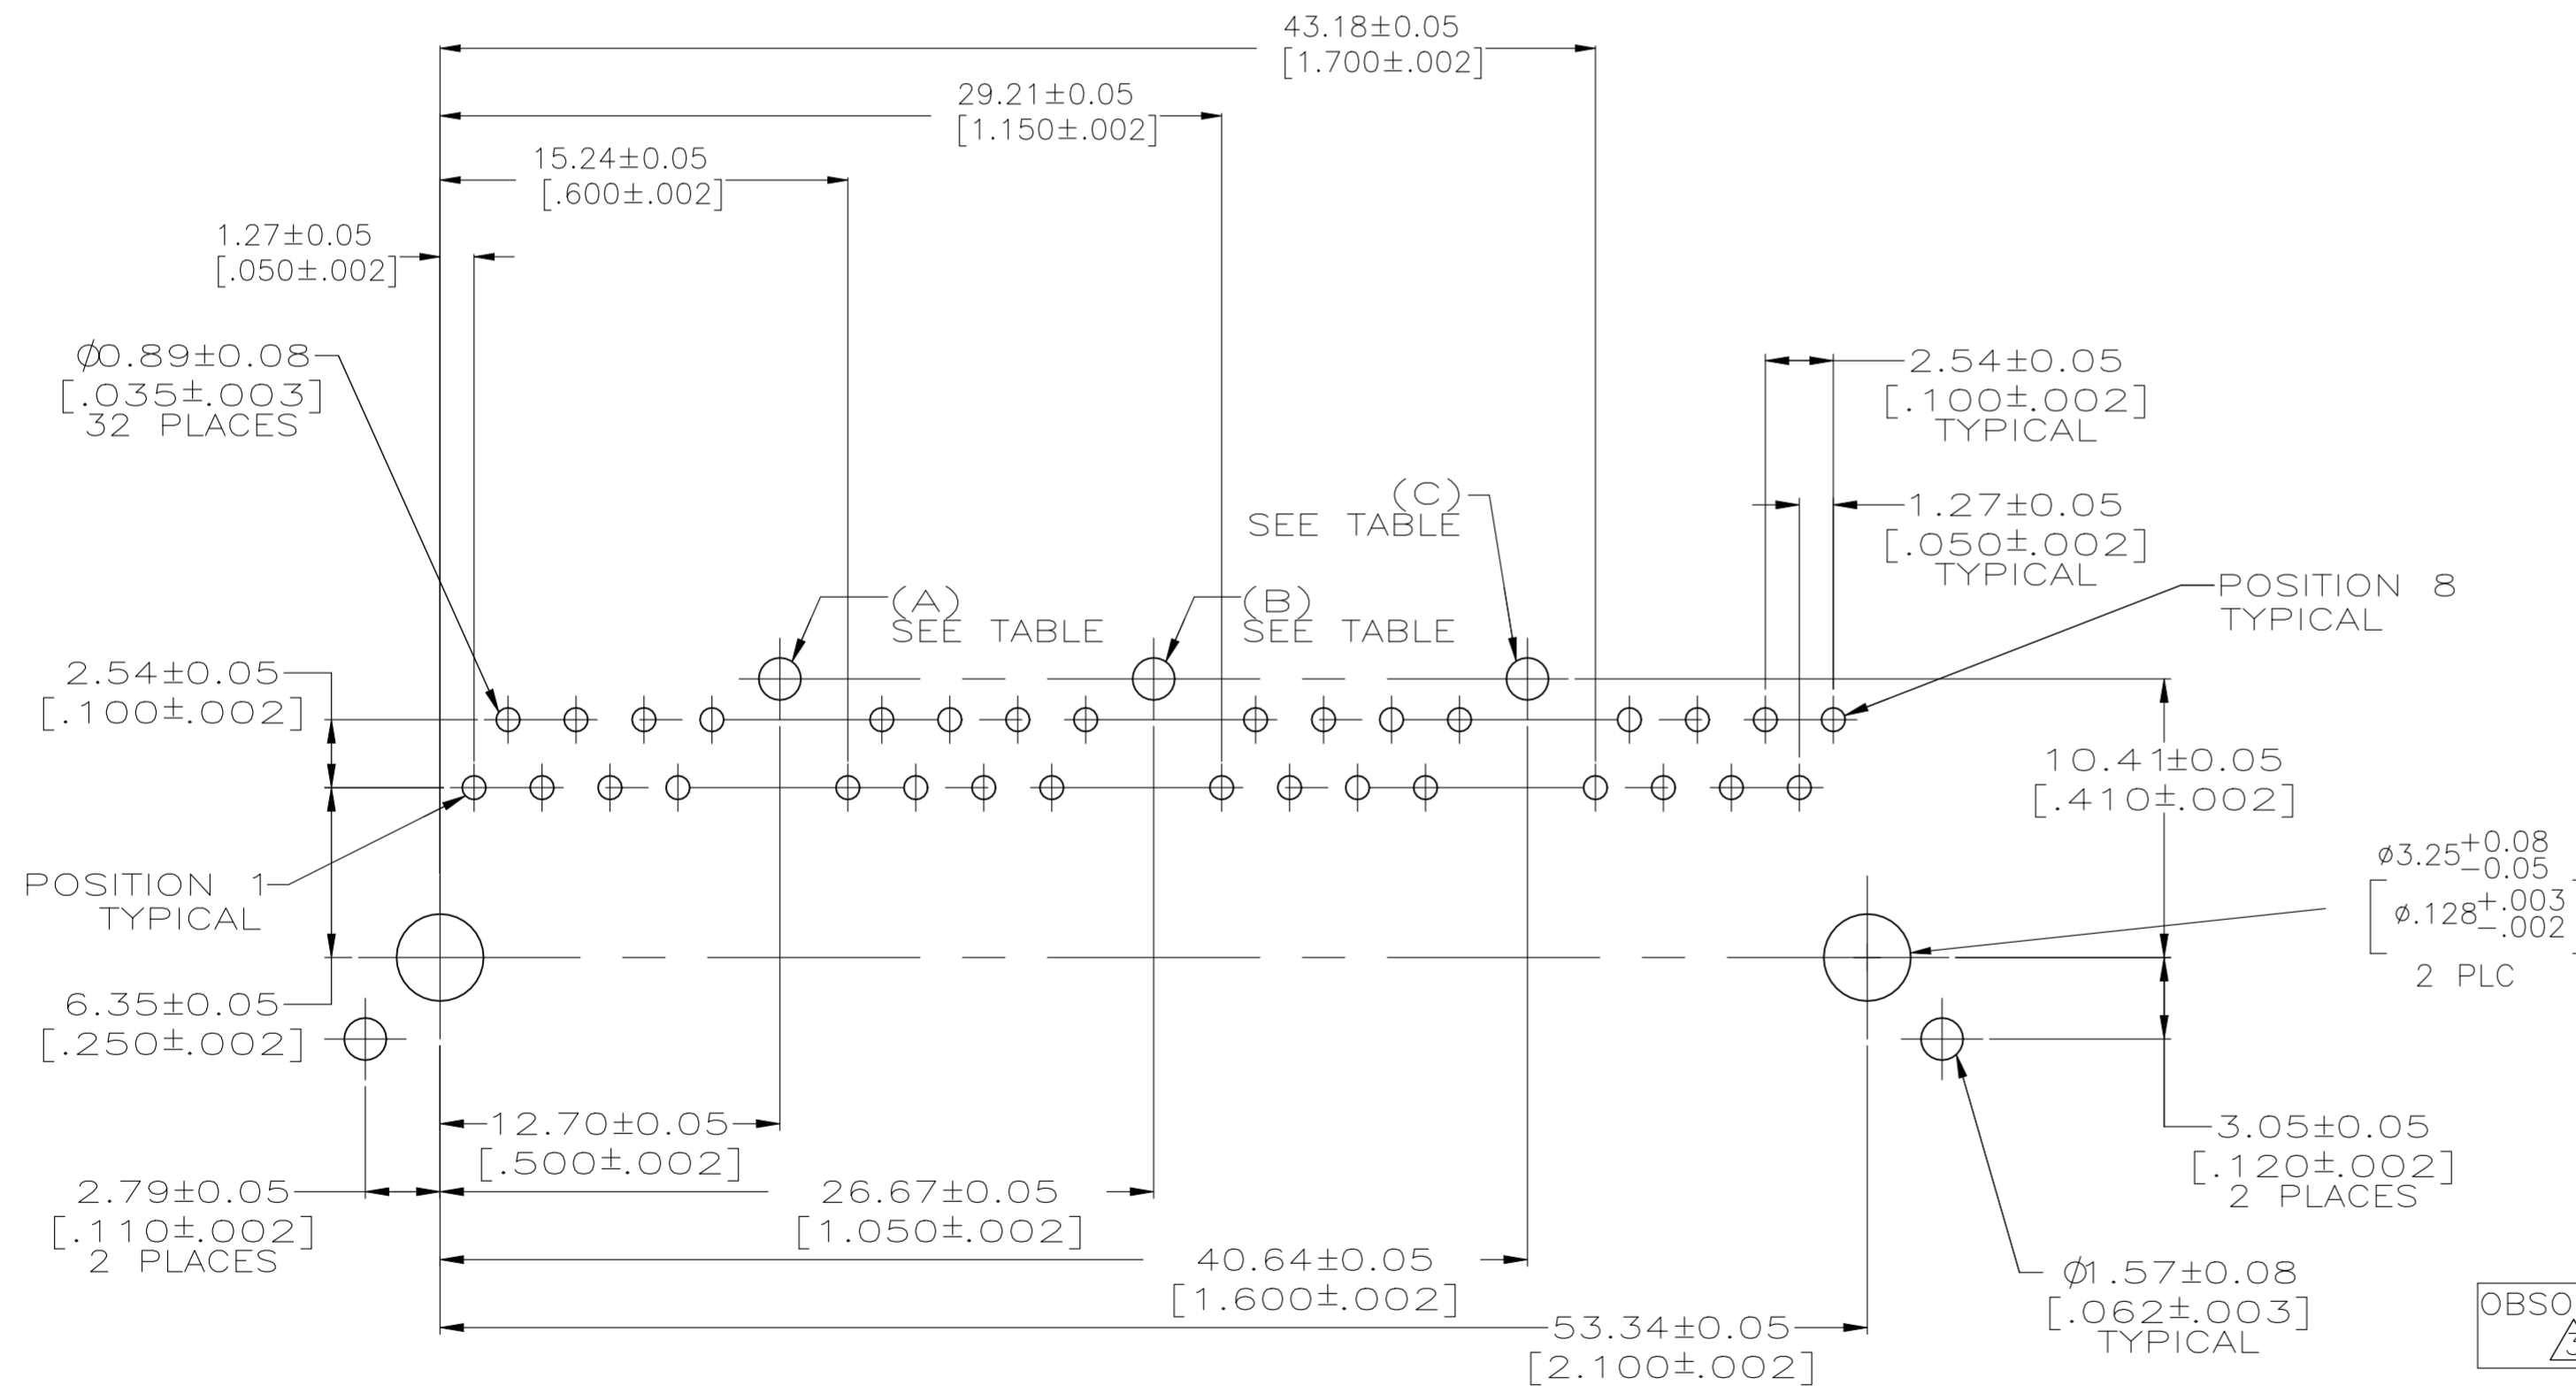

RECOMMENDED PC BOARD LAYOUT
 COMPONENT SIDE (TOP)
 SCALE 4:1

| | | | |
|---------------|-------------|------------------|-------------|
| OBSOLETE △ | (A) (B) (C) | ALL THREE | 5406278-3 |
| | (B) | (1) MIDDLE | -5406278-2- |
| | NONE | NONE | -5406278-1- |
| | HOLES USED | NO. OF REAR TABS | PART NO. |

| | | | | |
|--|--|--|-----------------|-----------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN J. ALCORTA - DOCK5 07JUN2005 | TE Connectivity | |
| DIMENSIONS: mm [INCHES] | TOLERANCES UNLESS OTHERWISE SPECIFIED: | CHK J. WESTMAN 07JUN2005 | NAME | |
| 0 PLC ± - | 1 PLC ± - | APVD S. FLICKINGER 07JUN2005 | PRODUCT SPEC | |
| 2 PLC ± 0.25[.01] | 3 PLC ± 0.13[.005] | APPLICATION SPEC | 108-1163-2 | |
| 4 PLC ± - | ANGLES ± - | 114-2048 | SIZE | CAGE CODE |
| MATERIAL SEE NOTE 1 | FINISH SEE NOTE 1 | WEIGHT 0.000000 | A2 | 00779 |
| CUSTOMER DRAWING | | SCALE 2:1 | SHEET 1 of 1 | REV C2 |