

т	۵	н <b>т</b>	m	C C



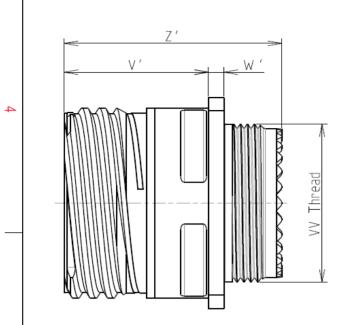



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			

: 2000 hours

8D 0

G

11

-

J

02

н


F

В

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
РР	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for a due to a use of the Products v the Specifications issued by either (professional recommend
Coun FR
PN: 8D011

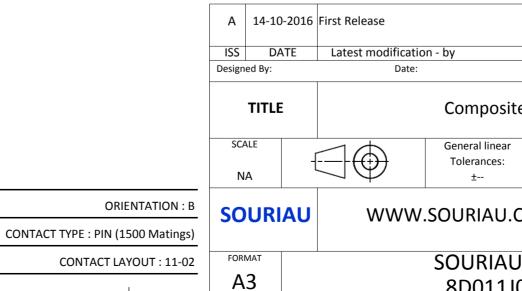

С

D

	Φ		A			
					4	
UT SHOWN AS EXA	MPLE				3	
t be liable for any r the Products whic						
sued by either of t	the Products which does not comply with sued by either of the Parties or by a third party al recommendation, technical notice.)					
Country FR	Jurisd	liction & Contro Not Listed	ol List		2	
N: 8D011J02HB						
- by		CUSTOMER	DRAWING	MOD N°		
Composite Receptacle 8D series						
General linear Tolerances: ±		NPRDS / P <b>85</b> 9	Ð		1	
OURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
SOURIAU I				SHEET 1/2		
8D011J02	B B		A	1/2	]	

ſ	<u>т</u>	D	П	m	D	0
		Contact Layout				Panel Cutor
4	.x .0 (2.	+Y  B  A  A  B  A +X (2.41mm)			2	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Con posi IC A B Shell Arrangement size no. 11 -2	tion         X-axis         Y-axis           0         (mm)         (mm)           4         +.095 (2.41)         +.000 (.00)           8        095 (2.41)         +.000 (.00)           Number of         Size         Service         Con	tact tion JI		<u>.</u>	Dim
ω						ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either o (professional recommendat
S						PN: 8D011.
					ISS DATE Designed By:	16 First Release Latest modification - by Date:
<b>→</b>					SCALE NA	General linear Tolerances:
					FORMAT A3	J WWW.SOURIAU.C SOURIAU 8D011J0
	Н	G	F	E	D	C

