
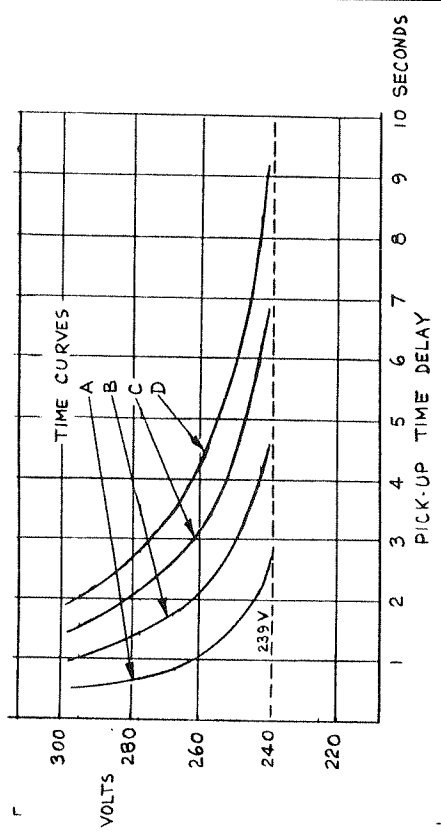
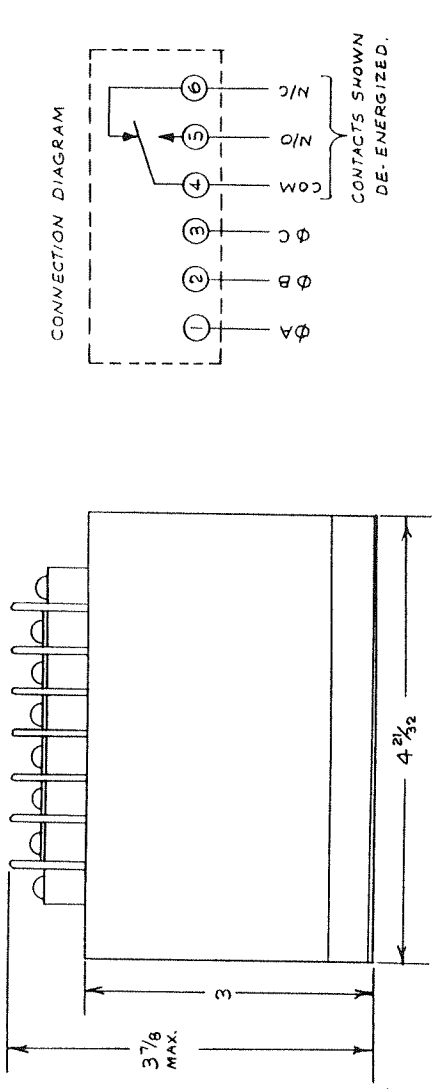


REVISIONS		DATE	APPROVED
ZONE	DESCRIPTION		
A	TIME CURVES ADDED	3/19/51	Ch
B	NOMINAL VOLTAGE WAS 120VAC	4/15/51	Ch

SPECIFICATIONS

NOMINAL VOLTAGE: 208VAC, 3Ø, 3 WIRE, 50/60 HZ.
 TYPE SENSING: HIGHEST OF THE 3-PHASE INPUT.
 T/D ADJUSTMENT RANGE: SEE FOUR TYPICAL CURVES BELOW AND NOTES 1 THRU 3.
 O/V ADJUSTMENT RANGE: 208 - 260 VAC. FACTORY SETTING: 239 VAC.
 TEMPERATURE RANGE: OPERATING: -25°F. TO +125°F. STORAGE: -65°F. TO +155°F.
 CONTACT RATING: 5 AMP AT 120VAC OR 28VDC. (RESISTIVE)

NSN 5945-01-198-2045

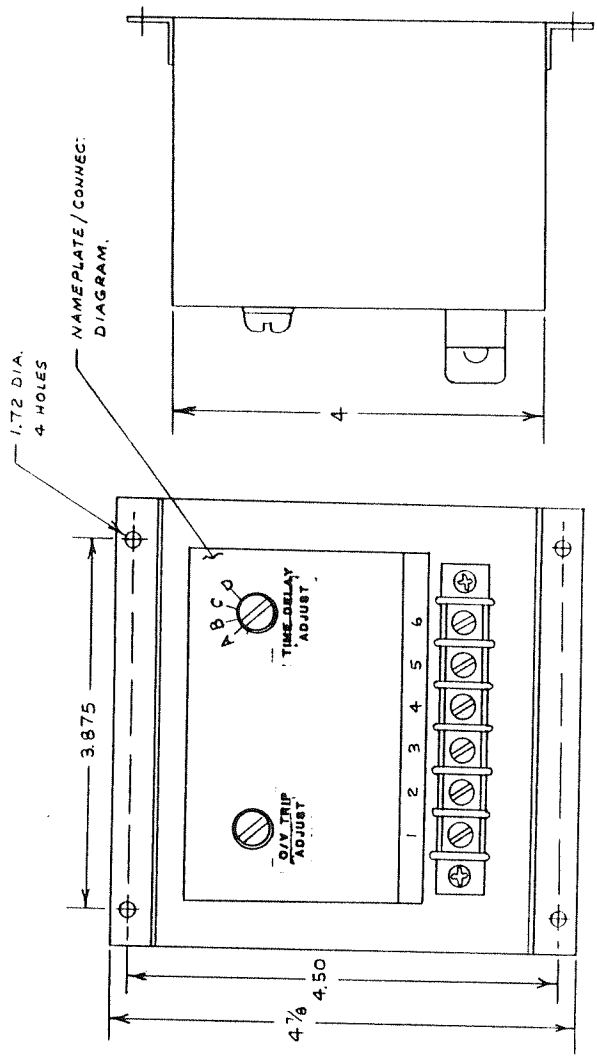

TYPICAL CURVES FOR 239VAC PICK-UP SETTING.

NOTES:

1. REMOVE SCREWS FOR ACCESS TO ADJUSTMENTS.
2. THE OVERVOLTAGE TRIP POINT IS SCREWDRIVER ADJUSTABLE. CLOCKWISE ROTATION OF THE ADJUSTMENT POTENTIOMETER WILL RAISE THE TRIP POINT.
3. A FOUR STEP SCREWDRIVER ADJUSTABLE SWITCH, PROVIDES THE SELECTION OF THE DESIRED TIME CURVE A, B, C OR D.

CITY, RECD.	SYM	DESCRIPTION	CODE IDENT. NO.	PART NO.	SPEC	MATERIAL OR NOTE	ITEM NO.
LIST OF MATERIAL							
CONTRACT NO.		WILMAR					
DRAWN		2-24-51					
CHECKED		JAN ANSEL STREET					
DESIGN APPROVAL		TERRANCE CALIFORNIA 95505					
PROJECT APPROVAL		LUCIMEL, INC.					
DESIGN ACTIVITY APPROVAL		TITLE					
APPROVAL		OVERVOLTAGE RELAY					
		MODEL 301-38X					
SIZE	CODE IDENT. NO.	DWG. NO.	SCALE		WEIGHT	SHEET	
C	25248	21-470	B				