




.079" [2.00 mm] Contact Centers, IDC Sockets, Insulation Displacement With or Without Strain Relief- SFH Series Mates with SBH21 series (See opposite page)

SPECIFICATIONS

- Centered Polarizing Key Optional
- Operating Temperature: -45°C to +105°C
- UL Flammability Rating: 94V-0
- Current Rating: 1 Amp
- Dielectric Withstanding: 500 VAC
- Insulation Resistance: 1000 Megohms

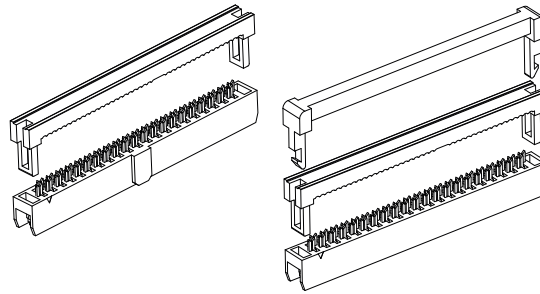

PART NUMBER OPTIONS

SFH21 - P P P N - D 10 - ID - BK - M181

SERIES
 SFH21 = IDC Socket Without Strain Relief, .079" [2.00 mm] Contact Centers by .079" [2.00 mm] Row Spacing
 SFH213 = IDC Socket With Strain Relief, .079" [2.00 mm] Contact Centers by .079" [2.00 mm] Row Spacing

INSULATOR MATERIAL
 P = PBT

CONTACT MATERIAL
 P = Phosphor Bronze

CONTACT FINISH - RoHS Compliant
 P = Gold Flash Overall
 V = Gold Flash on Contact Surface, Nickel on Termination

MODIFICATION (Omit for Standard)
 M181 = Without Centered Polarizing Key

COLOR
 BK = Black

TERMINATION TYPE
 ID = Insulation Displacement

NUMBER OF CONTACT POSITIONS
 03 thru 13, 15, 17, 20, 22, 25, 30, 34 (SFH21)
 05 thru 13, 15, 17, 20, 22, 25 (SFH213)

NUMBER OF ROWS
 D = Dual Row

CONTACT CENTERS
 N = .079" [2.00 mm]

DIMENSIONS For complete drawings, go to www.sullinscorp.com or e-mail techsupport@sullinscorp.com Dimensions in [] are in millimeters, all others are in inches.

INSULATION DISPLACEMENT (ID) without Strain Relief, requires SFH21
Example P/N: SFH21-PPPN-D20-ID-BK

Centered Polarizing Key Optional, Requires -M181 Modification to Remove

-M181 Modification (No Centered Polarizing Key)

INSULATION DISPLACEMENT (ID) with Strain Relief, requires SFH213
Example P/N: SFH213-PPPN-D20-ID-BK

Centered Polarizing Key Optional, Requires -M181 Modification to Remove

-M181 Modification (No Centered Polarizing Key)