

ACMS-1065 Series

Request Samples



Check Inventory (>)



10 x 8.7 x 6.5mm **RoHS/RoHS II Compliant** MSL Level = 1

Features

- Commercial Grade
- Excellent impedance characteristics
- Rated current up to 2.5A
- Low DCR

Applications

- Signal line common mode noise suppression.
- Differential signaling lines
- Multimedia devices

Electrical Specifications

Part Number	Inductance (uH) ±40%	DCR (mΩ)	Rated Current (A) Typ.	Common Impedance (Ω) Max	Rated Voltage (Vdc) Max	Leakage Inductance (nH) Typ.
ACMS-1065-121	120	25	2.5	460	80	860
ACMS-1065-221	220	32	2.2	780	80	1300
ACMS-1065-251	250	35	2.0	970	80	1500
ACMS-1065-471	470	65	1.6	1750	80	3000
ACMS-1065-102	1000	180	0.95	3600	80	5900
ACMS-1065-222	2200	300	0.75	7500	80	130
ACMS-1065-332	3300	360	0.65	8900	80	130
ACMS-1065-392	3900	540	0.52	9600	80	150
ACMS-1065-472	4700	720	0.35	13000	80	270

Inductance Test Conditions: 100KHz/0.1V

Leakage Inductance Test Conditions: 1MHz/1mA

Rated Current is based on an Irms temperature rise of 40°C

Operating Temperature: -40°C to +125°C (Including self-heating)

Storage (in original packaging): <40°C, <70% RH **ACMS-1065 Series is RoHS Compliant and Pb free**





ACMS-1065 Series

Request Samples





Check Inventory





10 x 8.7 x 6.5mm RoHS/RoHS II Compliant MSL Level = 1


Electrical Specifications (Cont'd)













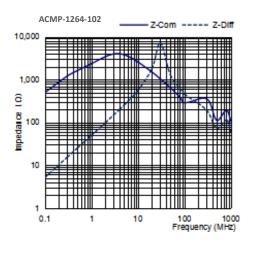













ACMS-1065 Series






Check Inventory (>)




10 x 8.7 x 6.5mm **RoHS/RoHS II Compliant** MSL Level = 1

Mechanical Specifications

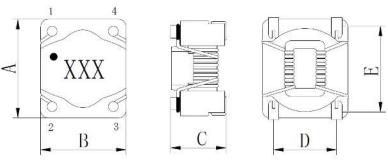


For 121, 221, 251, 471, 102.

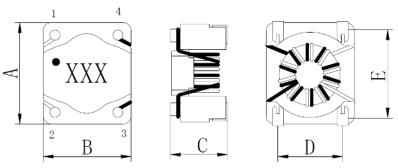

For 222, 332, 392, 472.

A	В	C	D	\mathbf{E}	
10.0 ± 0.3	8.7 ± 0.3	6.5 MAX	6.22 ± 0.2	7.62 ± 0.2	

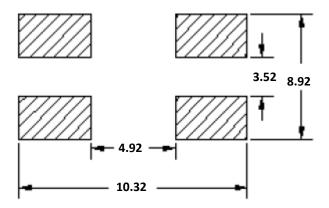

Dimensions: mm

Recommended Layout





ACMS-1065 Series

Request Samples (3)




Check Inventory (>)



10 x 8.7 x 6.5mm **RoHS/RoHS II Compliant** MSL Level = 1


Schematic



Materials

Description	Specification
Core	Ferrite core
Wire	Enameled copper wire
Base	Plastic
Adhesive	Epoxy resin
Terminal	Sn/Cu

Part Identification

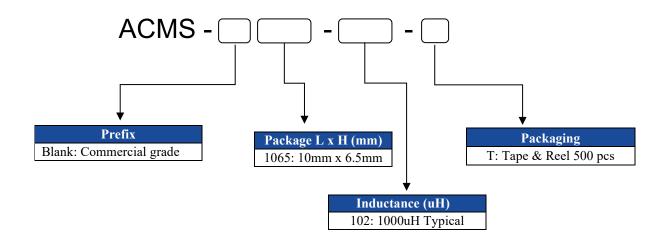





ACMS-1065 Series

Request Samples (>)




Check Inventory (>)



10 x 8.7 x 6.5mm RoHS/RoHS II Compliant MSL Level = 1

Reflow Profile

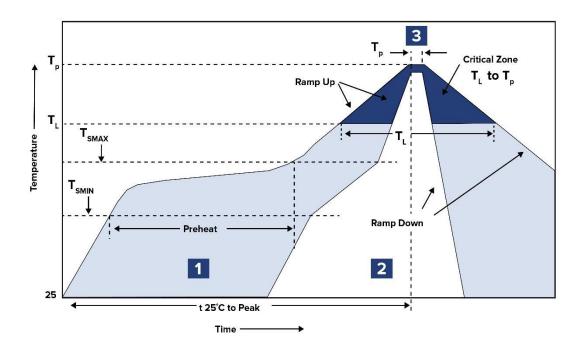

Zone	Description	Temperature	Times
1	Preheat	$\begin{split} T_{SMIN} \sim T_{SMAX} \\ 150^{\circ}C \sim 190^{\circ}C \end{split}$	$60 \sim 120 \text{ sec.}$
2	Reflow	T _L 240°C	20 ~ 40 sec.
3	Peak heat	T _P 260°C Max.	5 sec. Max

1~2 °C/Sec. Ramp





ACMS-1065 Series

Request Samples




Check Inventory (>)




10 x 8.7 x 6.5mm **RoHS/RoHS II Compliant** MSL Level = 1

Packing

Tape & Reel: 500pcs/reel

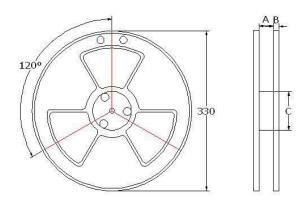

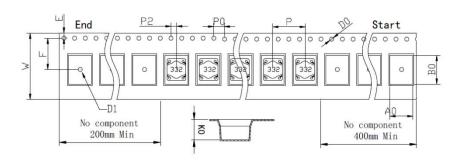

W	P	P0	P2	D0	Е	F	A0	В0	K0
24 ±	12 ±	$4.0 \pm$	2.0 ±	1.5 ±	1.75 ±	11.5 ±	9.1 ±	10.5 ±	6.8 ±
0.30	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10

ATTENTION: Abracon LLC's products are COTS - Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.

