

SURFACE MOUNT MICROPROCESSOR CRYSTAL

Page 1 of 3

RH100-40.000-10-F-1010-TR


SPECIFICATIONS

| PARAMETER | VALUE |
|--------------------------------------|------------------------|
| NOMINAL FREQUENCY | 40.000 MHz |
| MODE OF OSCILLATION | Fundamental |
| FREQUENCY TOLERANCE AT 25°C | ±10 ppm max |
| FREQUENCY STABILITY OVER TEMPERATURE | ±10 ppm max |
| OPERATING TEMPERATURE RANGE | -20°C to +70°C |
| STORAGE TEMPERATURE RANGE | -40°C to +85°C |
| AGING | ±3 ppm per year max |
| LOAD CAPACITANCE | 10 pF |
| EQUIVALENT SERIES RESISTANCE | 60 Ω |
| SHUNT CAPACITANCE | 7 pF max |
| DRIVE LEVEL | 300 μW typ, 500 μW max |




Photo is not actual part

MECHANICAL SPECIFICATION

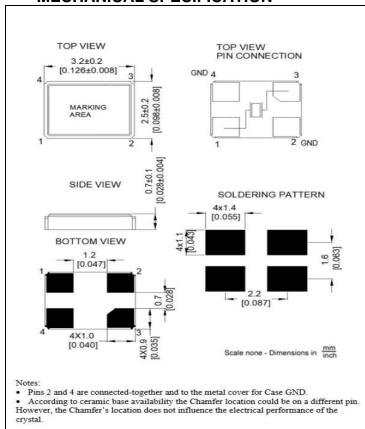

CARRIER TAPE DIMENSIONS

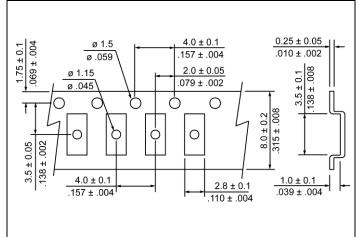

NOTE: REFER TO EIA-481 FOR DIMENSIONS

PACKAGING

178 mm REEL DIAMETER 8 mm TAPE WIDTH, 4 mm PITCH QUANTITY: 3000 PIECES PER REEL

IN ACCORDANCE WITH EIA-481


SURFACE MOUNT MICROPROCESSOR CRYSTAL

Page 2 of 3

RH100-40.000-10-F-1010-TR

REFLOW PROFILE

A RAMI TECHNOLOGY Company

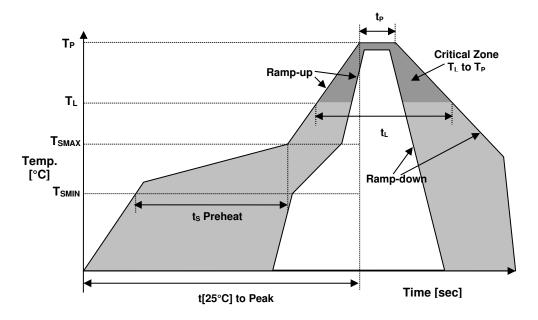

| Reflow profile | | | | |
|--|-------------------|--------------|--|--|
| Temperature Min Preheat | T _{SMIN} | 125°C | | |
| Temperature Max Preheat | T _{SMAX} | 150°C | | |
| Time (T _{SMIN} to T _{SMAX}) | ts | 30-60 sec. | | |
| Temperature | T_L | 217°C | | |
| Peak Temperature | T_P | 260°C | | |
| Ramp-up rate | R _{UP} | 3°C/sec max. | | |
| Ramp-down rate | R _{DOWN} | 6°C/sec max. | | |
| Time within 5°C of Peak Temperature | t _P | 10 sec. | | |
| Time t[25°C] to Peak Temperature | t[25°C] to Peak | 120 sec. | | |
| Time | t∟ | 60-150 sec. | | |

ENVIRONMENTAL

| PARAMETER | VALUE |
|----------------------------|-----------|
| MOISTURE SENSITIVITY LEVEL | 1 |
| RoHS | Compliant |
| REACH SVHC | Compliant |
| HALOGEN-FREE | Compliant |
| ESD CLASSIFICATION LEVEL | N/A |
| TERMINATION FINISH | Au |





SURFACE MOUNT MICROPROCESSOR CRYSTAL

Page 3 of 3

RH100-40.000-10-F-1010-TR

MARKING

R40.000 xxKEyw

x – Internal Production ID code

y – Year code

w - Week code

| YEAR CODE | | |
|-----------|------|--|
| Year | Code | |
| 2019 | 9 | |
| 2020 | 0 | |
| 2021 | 1 | |
| 2022 | 2 | |
| 2023 | 3 | |
| 2024 | 4 | |
| 2025 | 5 | |
| 2026 | 6 | |
| 2027 | 7 | |
| 2029 | 8 | |
| 2029 | 9 | |

| | ALPHA WEEK CODE TABLE | | | | |
|------|-----------------------|------|------|------|------|
| Week | Code | Week | Code | Week | Code |
| 1 | a | 19 | s | 37 | K |
| 2 | b | 20 | t | 38 | L |
| 3 | c | 21 | u | 39 | M |
| 4 | d | 22 | v | 40 | N |
| 5 | e | 23 | w | 41 | O |
| 6 | f | 24 | x | 42 | P |
| 7 | g | 25 | у | 43 | Q |
| 8 | h | 26 | Z | 44 | R |
| 9 | i | 27 | A | 45 | S |
| 10 | j | 28 | В | 46 | T |
| 11 | k | 29 | C | 47 | U |
| 12 | 1 | 30 | D | 48 | V |
| 13 | m | 31 | E | 49 | W |
| 14 | n | 32 | F | 50 | X |
| 15 | o | 33 | G | 51 | Y |
| 16 | p | 34 | H | 52 | Z |
| 17 | q | 35 | I | | |
| 18 | r | 36 | J | | |

APPROVAL

| DRAWN BY | KJackson, May 10, 2016 |
|-------------|-----------------------------------|
| APPROVED BY | KJackson, May 10, 2016 |
| REVISION | A, Initial Release |
| | B, Updated to current spec levels |
| | by XS, February 18, 2021 |

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is provided only for reference purposes only and is subject to a rau prit in evit information is provided only for reference purposes only and is subject to a rau prit in evit information is provided only for reference purposes only and is subject to a rau prit in evit information is provided only for assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.