

The marking on this product doesn't contain environmental hazardous, materials per directive 2011/65/EU for RoHS compliant.

ECN NO.	REV.	DESCRIPTIONS	CHECKED	APPROVED	DATE
REL.	AX1	INITIAL RELEASE	HANK	DAVID	12/23/2014
	AX2	CHANGE LABEL CONTENT	MINNA	DAVID	01/07/2015


NOTE:

1. THE CABLE ASSEMBLY SHALL BE RoHS2.0 COMPLIANT.


该产品通过RoHS2.0认证.

2. ELECTRICAL AND MECHANICAL PERFORMANCE SHALL MEET THE SAS3.0 INDUSTRIAL STANDARD.

电气和机械特性遵循SAS3.0工业标准.

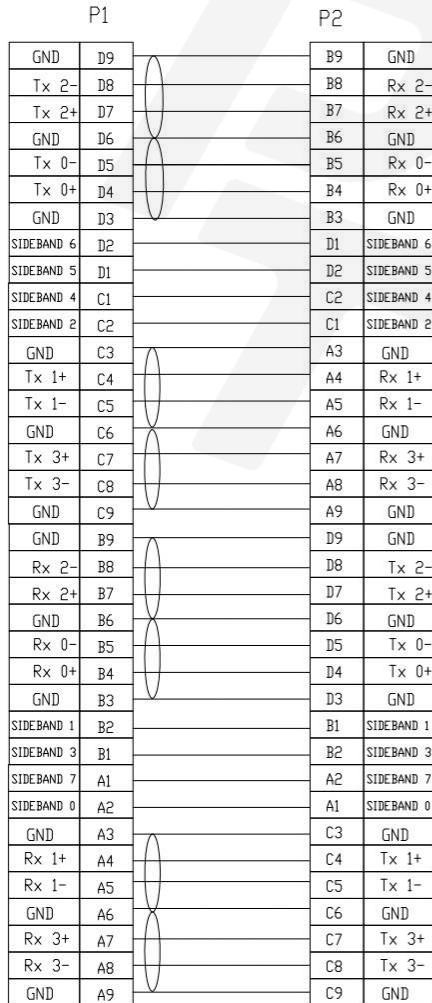

WIRING DIAGRAM

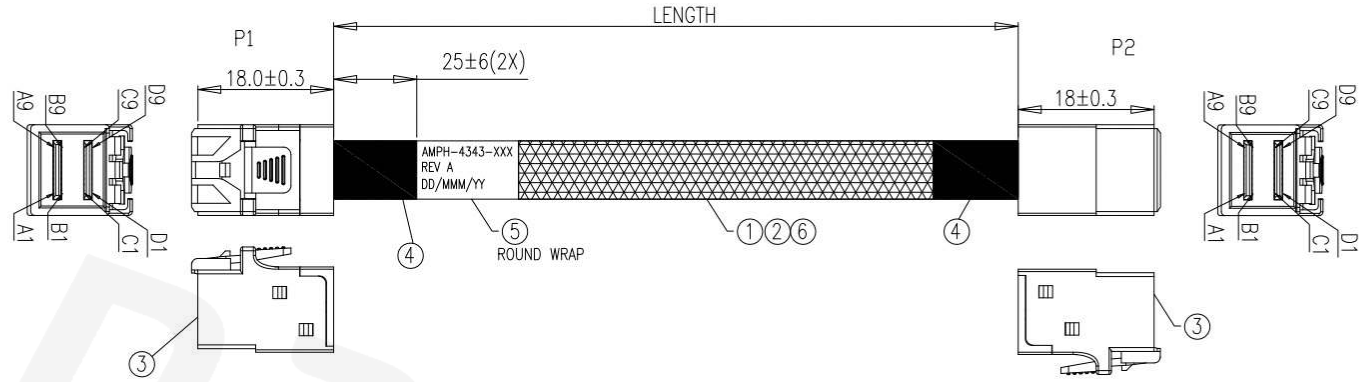

PN	Length (mm)
AMPH-4343-210	210 ±10
AMPH-4343-025	250 ±10
AMPH-4343-050	500 ±10
AMPH-4343-075	750 ±10
AMPH-4343-100	1000 ±15

For Customer Made Items Order:

- \* Minimum \$200 value
- \* NCNR (Non-cancelable & non-returnable)
- \* One time tooling charge, if any, need to be paid in advance with P.O.
- \* All drawings of First Articles, if any, must be approved with authorized signature & date.
- \* Turn around time counted ARO (After Received FA or drawing approval)

APPROVED BY


COMPANY: \_\_\_\_\_

PURCHASING/ENGINEER: \_\_\_\_\_

DATE: \_\_\_\_\_

PN LIST

6	HMTBD00501	EXPANDO TUBE:OD=5MM,BLACK	A/R
5	HMLSB57262	LABEL:57*26MM,BLANK	1
4	HMMTP00012	ACETATE TAPE:W=1INCH	A/R
3	AST8643-0036-04	HD MINI SAS 36POS STRAIGHT,SHORT TYPE	2
2	R10610300X	WIRE,.30AWG,UL1061,STRANDED	A/R
1	HWS300036	SAS CBL:UL20744,.30#1P+2D VW-1,NATURAL,R2,12G,HF	A/R
ITEM	P/N	DESCRIPTION	QTY

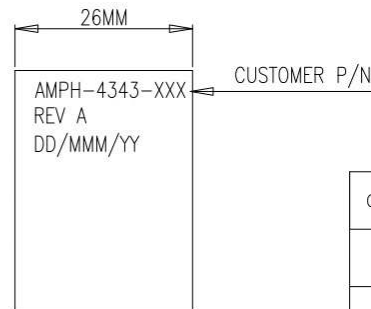

LABEL DETAIL

GENERAL TOLERANCES

.X:	± 0.15
.XX:	± 0.10
.XXX:	±
ANGULAR:	±



DRAWN:	<b>C. Du</b>	DATE:	<b>3/16/15</b>
CHECKED:	<b>A. Chui</b>	DATE:	<b>3/16/15</b>
APPROVED:	<b>J. Lai</b>	DATE:	<b>3/16/15</b>

Amphenol

TITLE:	SFF8643 MINI SAS HD 36 POS STR TO 36 POS STR	
DWG. No.:	<b>AMPH-4343-XXX</b>	
SCALE:	NONE	SHEET 1 OF 1
UNIT:	MM	REV.: AX2