
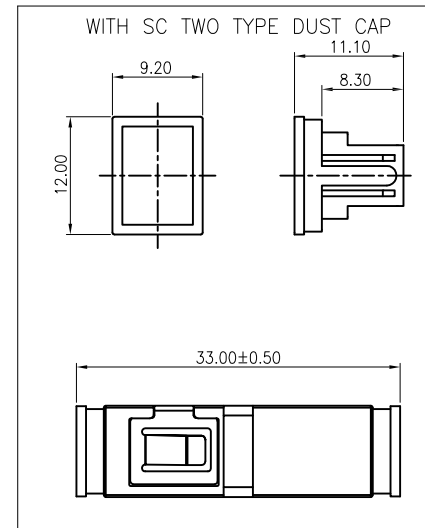


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/14/20	

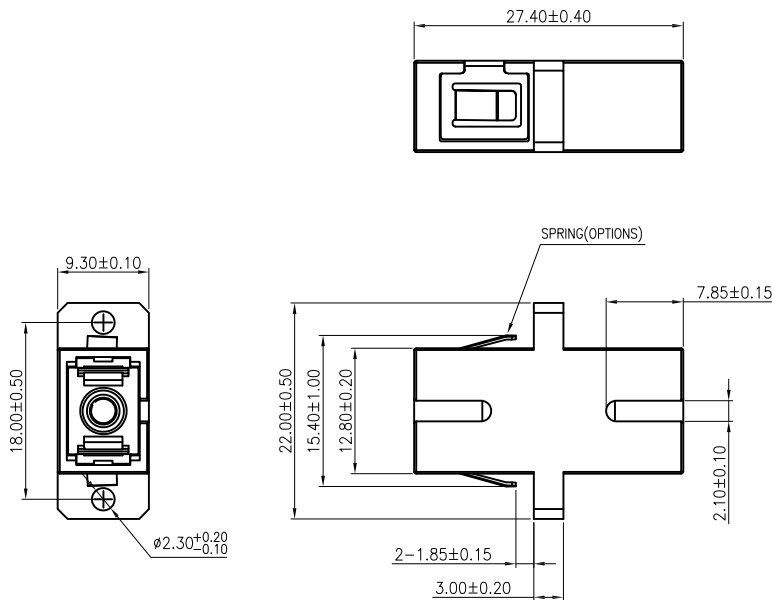

OPSA1ASNC1N1	SC/APC, W/O Panel Ground	PBT 7737C Green	PBT Black
OPSA1ASNC1P1	SC/APC, W/Panel Ground	PBT 7737C Green	PBT Black
OPSB1ASNC1N1	SC/PC, W/O Panel Ground	PBT 2184C Blue	PBT Black
OPSB1ASNC1P1	SC/PC, W/Panel Ground	PBT 2184C Blue	PBT Black
PART NUMBER	DESCRIPTION	Housing&insert color	Cap color

SPECIFICATIONS:

Material:
 Housing: PBT, rated UL 94V-0, Color: See Chart
 Cap: PBT, rated UL 94V-0, Color: Black
 Sleeve: Zirconia ceramic
 Electrical:
 Standards of IEC, EIA/TIA, Telcordia
 Repeatability: 500 min
 Insertion loss: 0.2dB max
 Interchangeability: 0.2dB max
 Repeatability: 0.2dB max
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MILLIMETERS
 TOLERANCES: EXCEPT AS NOTED
 MM ANGLE
 X. ± 0.35 X.* ± 2°
 .X ± 0.30 .X* ± 1°
 .XX ± 0.25 .XX* ± 0.5°
 .XXX ± 0.15 .XXX* ± 0.5°

ADAM TECH INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	OW	9/14/20
CHECKED	JL	9/14/20
APPROVED		

TITLE		
SC TYPE ADAPTER, APC&PC, 1 PORTS, LONG EARS, WITH SC TWO TYPE DUST CAP, SOLID BLOCK		
SIZE	PART NO.	REV.
X	OPSX1ASNC1X1	-
REF:	S00005C	SCALE: NTS
		SHEET 1 OF 1

6 5 4 3 2 1

6 5 4 3 2 1

D

D

C

C

B

B

A

A