THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECO-10-017912	22SEP2010	CJV	SLB

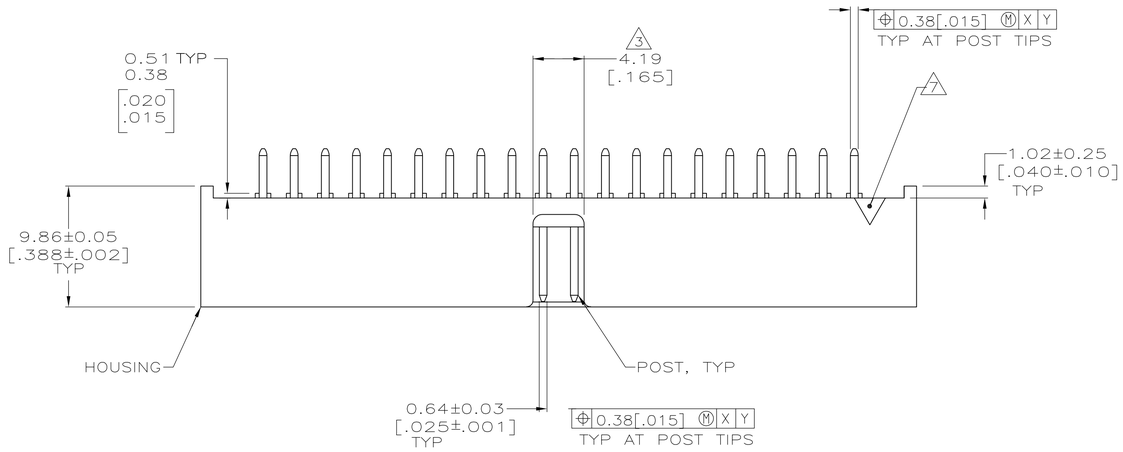

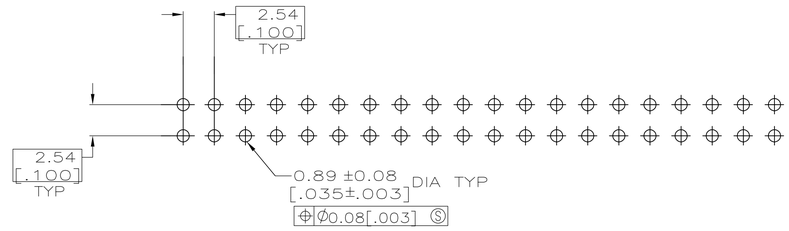

RECOMMENDED HOLE LAYOUT

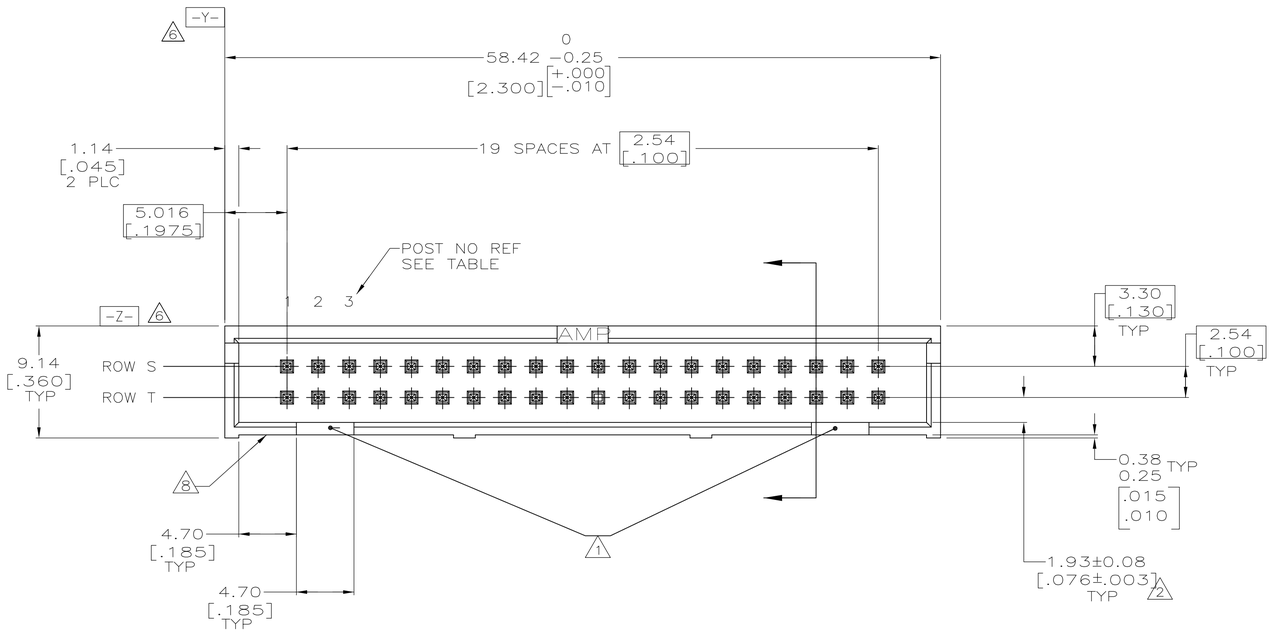

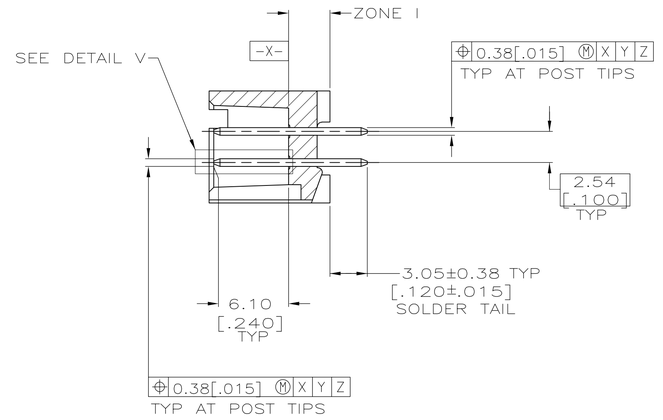

1. DOUBLE BAR POLARIZATION.
2. DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING.
3. CENTER POLARIZATION SLOT.
4. HOUSING: GLASS FILLED NYLON OR PBT, BLACK, UL 94V-0 RATED.
   POSTS: BRASS.
5. POSTS: GOLD FLASH ON LOCALIZED GOLD PLATE AREA, 2.54 µm [.000100] MIN
   TIN-LEAD ON SOLDER TAIL, ALL OVER 1.27µm [.000050] MIN NICKEL.
6. DATUMS Y AND Z APPLY IN ZONE I.
7. NUMBER 1 POSITION INDICATOR.
8. OPTIONAL AMP IDENTIFICATION NUMBER (DATE CODE).
   LOCATION APPROXIMATELY WHERE SHOWN.



DETAIL V
SCALE 10:1

11	NONE	40	111715-8
ROW T	ROW S	NO OF POSN	PART NUMBER
POST OMITTED			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.13[.005]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL 4

FINISH 5

DWN M.MORRIS 20JUL98
CHK K.FULLER 20JUL98
APVD K.FULLER 20JUL98
PRODUCT SPEC 108-40018
APPLICATION SPEC -
WEIGHT -

Tyco Electronics
Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME HEADER ASSY, LOW PROFILE, AMP-LATCH TM

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-111715	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV D