



Electrical specifications

Center Frequency: 1460 MHz
Bandwidth: 36 MHz
VSWR: 1.5:1 min
Input / Output Impedance: 50 Ohms
Passband: 1442-1478 MHz
Passband Insertion Loss: 2.5 dB max
Passband Ripple: 0.5 dB max
Rejection: 70 dBc at DC-1200 MHz
Rejection 2: 50 dBc at 1390 MHz
Rejection 3: 45 dBc at 1530 MHz
Rejection 4: 70 dBc at 1700-3000 MHz
Power Handling: 1 W
Group delay variation: 12.0 ns max

Mechanical


Mounting Method: SMT
Dimensions: 38.6 x 14 x 6.9 mm

Environmental

Operating Temperature: -20°C to 85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

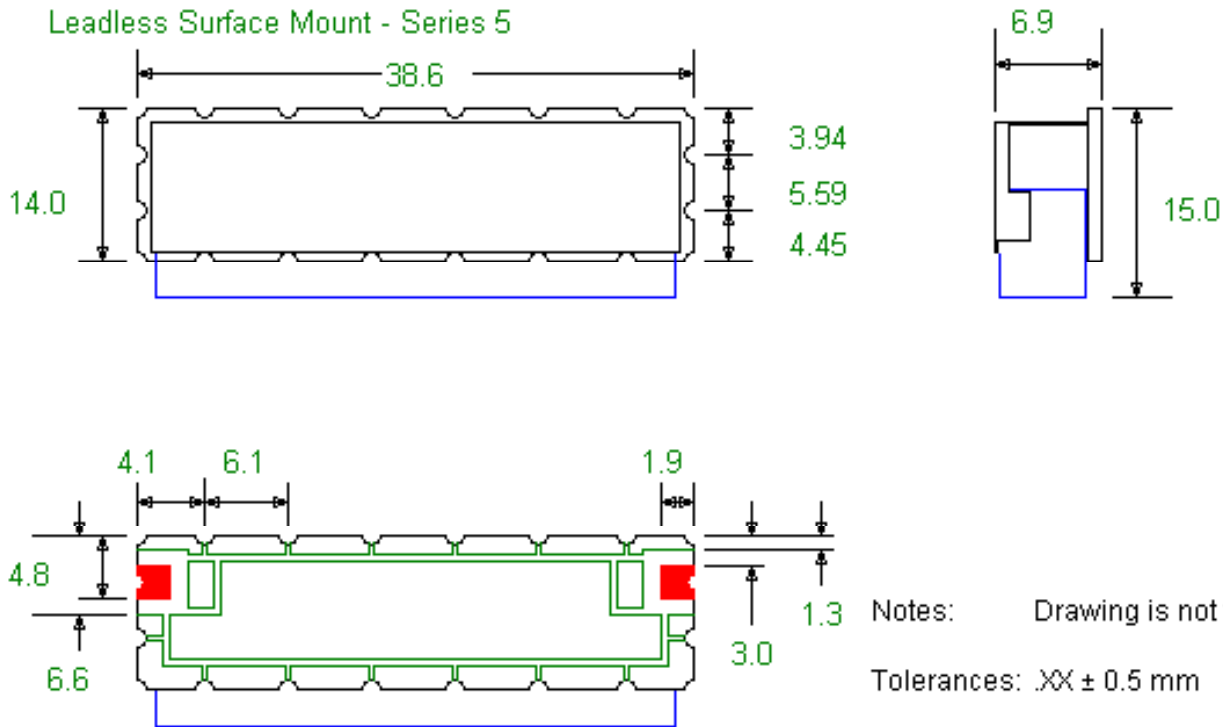

Notes: Drawing is not to scale.
Tolerances: .XX ± 0.5 mm

Input and Output Shown In Red