


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	5961001921	~

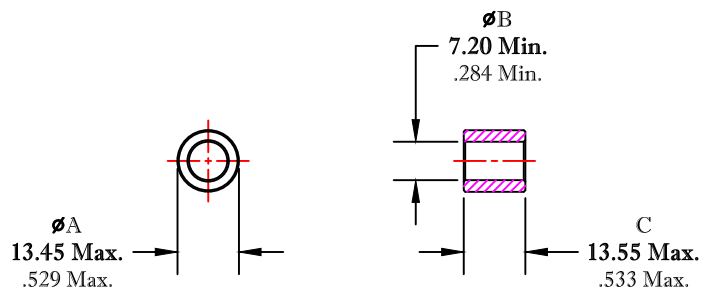

AFTER COATING

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS							
$\Sigma l/A(\text{mm}^{-1})$	l_e (mm)	A_e (mm ²)	V_e (mm ³)	L_o (nH)	AL (nH) @ 10 kHz <10gauss	$\tan \delta/\mu_1$ @ 1 MHz 1gauss	$\tan \delta/\mu_1$ @ 10 MHz 1gauss
1.0421	31.2	30.0	932	1.206	150±25%	≤75X10E-6	≤350X10E-6
N = 10							

NOTES:

- 1 - THIS PART TO BE THERMOSET PLASTIC COATED, USE APPROVED FR# 5961001901.
- 2 - COATING THICKNESS = 0.25mm [.010"] MAX.
- 3 - COATED TOROID TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 1000 Vrms, WHEN UNIFORMLY APPLIED ACROSS THE "C" DIMENSION.

FR# 61

FAIR-RITE PRODUCTS CORP.							
TITLE							
COATED TOROID							
DRAWN BY J.SERENCISCS	DATE 07-17-2018	SIZE	PART NO.	REV.			
CHKD BY		B	5961001921	~			
APPRVD BY		SCALE	NONE	SHEET	1	of	1