


RECOMMEND PCB-HOLE LAYOUT
 COMPONENT SIDE SHOWN
 TOLERANCE ±0.05

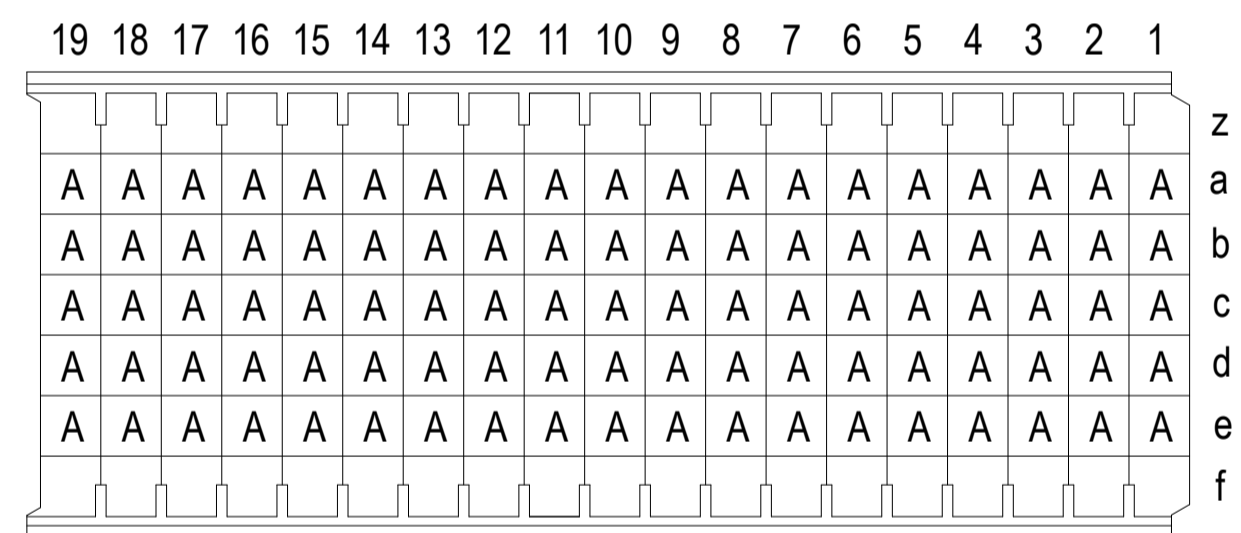

1 MATERIAL:
 CONTACT: COPPER ALLOY.
 HOUSING: GLASS-FILLED POLYESTER.

2 GENERAL PLATING SPECIFICATION: UNDERPLATING
 (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
 PIN: 0.5µm MIN TIN.
 FOR PLATING OF MATING SURFACES SEE APPLICABLE
 SPECIFICATION REFERENCE FOR EACH DASH NUMBER.

3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
 PERFORMANCE LEVEL 2.

4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.

| REVISIONS | | | | |
|-----------|-----|-----------------|-----------|-------|
| P | LTR | DESCRIPTION | DATE | APP'D |
| A | | INITIAL DRAWING | 18OCT2021 | TL HL |

| | |
|--------|-------------|
| 2/3 | 2392844-1 |
| FINISH | PART NUMBER |

| | | | | |
|--|--|------------------------------|---|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DIN TONY LI 27MAY2021 | STE TE Connectivity Ltd. | |
| DIMENSIONS: mm | | CHK ALEX XU 27MAY2021 | NAME MALE ASSEMBLY, Z-PACK 2mm HM, 95P TYPE B EON | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD HOPE LU 27MAY2021 | PRODUCT SPEC 108-19082 | |
| 0-PLC ± | | APPLICATION SPEC 114-160149 | | |
| 1-PLC ±0.2 | | SIZE A1 | | |
| 2-PLC ± | | CAGE CODE 00779 | | |
| 3-PLC ± | | DRAWING NO. 2392844 | | |
| 4-PLC ± | | RESTRICTED TO | | |
| ANGLES ± | | WEIGHT 0 | | |
| MATERIAL 1 | | CUSTOMER DRAWING | | |
| FINISH SEE TABLE | | SCALE 4:1 SHEET 1 of 1 REV A | | |