



ELECTRICAL SPECIFICATIONS:

- | | | |
|-----|--|--|
| 1.0 | URNS RATIO: (P12-P18-P13) : (J3-J6) | : 1CT : 1CT ±3% |
| | (P10-P9-P11) : (J1-J2) | : 1CT : 1CT ±3% |
| 2.0 | INDUCTANCE: (P12-P13) | : 400uH MIN. @ 0.1V, 100KHz, 8mA DC Bias |
| | (J1-J2) | : 400uH MIN. @ 0.1V, 100KHz, 8mA DC Bias |
| 3.0 | LEAKAGE INDUCTANCE: P12-P13 (WITH J6 AND J3 SHORT) | : 0.3uH MAX. @ 1MHz |
| | P10-P11 (WITH J2 AND J1 SHORT) | : 0.3uH MAX. @ 1MHz |
| 4.0 | INTERWINDING CAPACITANCE: (P12,P13) TO (J6,J3) | : 30pf MAX @ 1MHz |
| | (P10,P9,P11) TO (J2,J1) | : 30pf MAX @ 1MHz |
| 5.0 | DC RESISTANCE: (J6-J3)=(J2-J1) | : 1.2 ohms Max. |

	InNet Technologies, Inc. http://www.innet-tech.com	
	 Stewart Connector Systems http://www.stewartconnector.com	
SHEET 1 OF 4	DRAWING NO. SI-70022	REV. X1

6.0 RETURN LOSS: (P10-P11)=100 OHMS AND (P12-P13)=100 OHM REF.
 1MHz TO 30MHz : -20dB MIN.
 30MHz TO 60MHz : -(19-20LOG (f/30MHz)) MIN
 80MHz : -12dB MIN.

NOTE: 100 OHMS CONNECTED TO (J2-J1) OR (J6-J3).



7.0 DIELECTRIC WITHSTAND: (J1, J2) TO (P10, P11) : 1500 RMS
 (J3, J6) TO (P12,P13) : 1500 RMS





8.0 INSERTION LOSS: RS=RL=100 ohms
 1MHz TO 65MHz : -1 dB MAX

9.0 RISE TIME: RS=100 OHMS AND RL = 100 OHMS
 OUTPUT VOLTAGE = 1 V peak : 3.0 nS MAX
 PULSE WIDTH= 112nS : 3.0 nS MAX

10.0 CROSS TALK: 1-65 MHz : -35 dB MIN.


11.0 COMMON TO COMMON MODE ATTENUATION: 30MHz TO 100MHz : -30 dB MIN
 100MHz TO 130MHz : -20 dB MIN

		InNet Technologies, Inc. http://www.innet-tech.com	
		Stewart Connector Systems http://www.stewartconnector.com	
SHEET 2 OF 4	DRAWING NO. SI-70022	REV. X1	

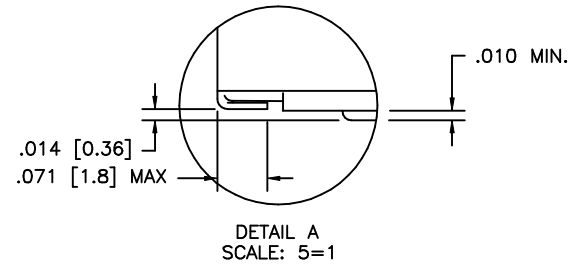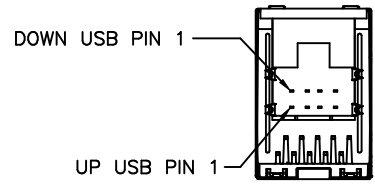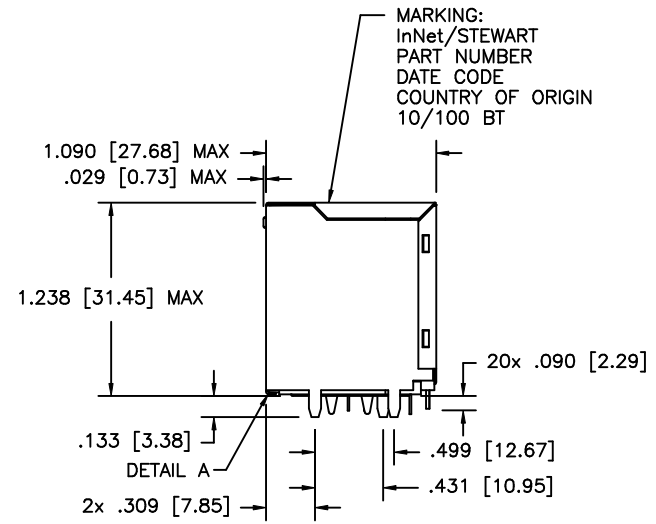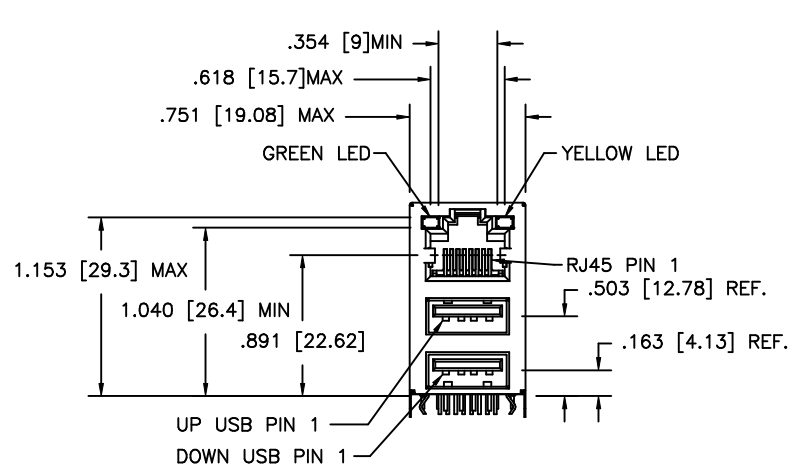


NOTES:



- 1.0 TOLERANCE COMPLY WITH FCC DIMENSION REQUIREMENTS.
- 2.0 PIN NOT ELECTRICALLY CONNECTED MAY BE OMITTED. SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- 3.0 MATERIAL:
 PLASTIC: UL94V-Ø
 TERMINAL USB: CERTIFIED TO USB SPEC 2.0
 TERMINAL RJ45: 50 MICROINCHES Au OVER 50 MICROINCHES Ni OVER PHOSBRONZE SHIELD, BOTH USB AND RJ45: BRASS PLATED W/EITHER Ni OR TIN-LEAD
- 4.0 GENERAL TOLERANCE: ±.005 [.127]
- 5.0 INSERTION FORCE RJ45: 9.0 lbs MAX
 INSERTION FORCE USB: 7.7 lbs MAX
- 6.0 WITHDRAW FORCE RJ45: 2.9 lbs MIN
 WITHDRAW FORCE USB: 2.2 lbs MIN
- 7.0 DURABILITY FORCE RJ45: 1000 INSERTIONS
 DURABILITY FORCE USB: 1500 INSERTIONS
- 8.0 CONNECTOR TO PCB INSERTION FORCE: 8.6 lbs MAX

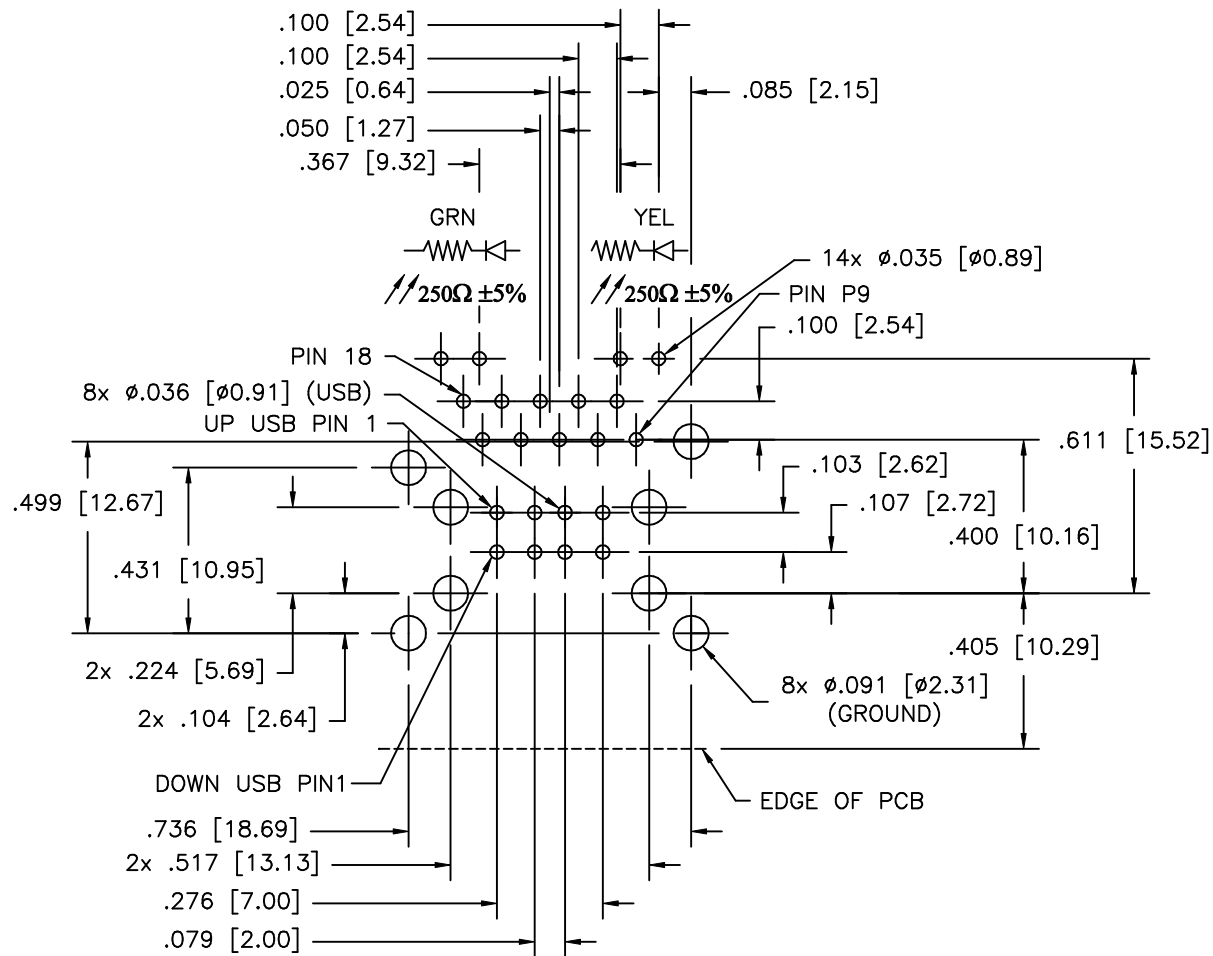

	InNet Technologies, Inc. http://www.innet-tech.com	
	Stewart Connector 	
Stewart Connector Systems http://www.stewartconnector.com		SHEET 3 OF 4
DRAWING NO.		REV.
SI-70022		X4



PC BOARD LAYOUT COMPONENT SIDE SHOWN
 TOLERANCE: ±.003 [.08] UNLESS OTHERWISE SPECIFIED

 InNet Technologies, Inc. http://www.innet-tech.com	
 Stewart Connector Systems http://www.stewartconnector.com	
SHEET 4 OF 4	DRAWING NO. SI-70022
REV. X4	