


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	A1	ADD DASH 1-0, 1-1	29NOV11	SW	RZ	

NOTE:

1. DIMENSIONS IN [] ARE IN INCHES.
2. 0.5 dB MAX INSERTION LOSS.
3. 55 dB MIN RETURN LOSS.
4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702

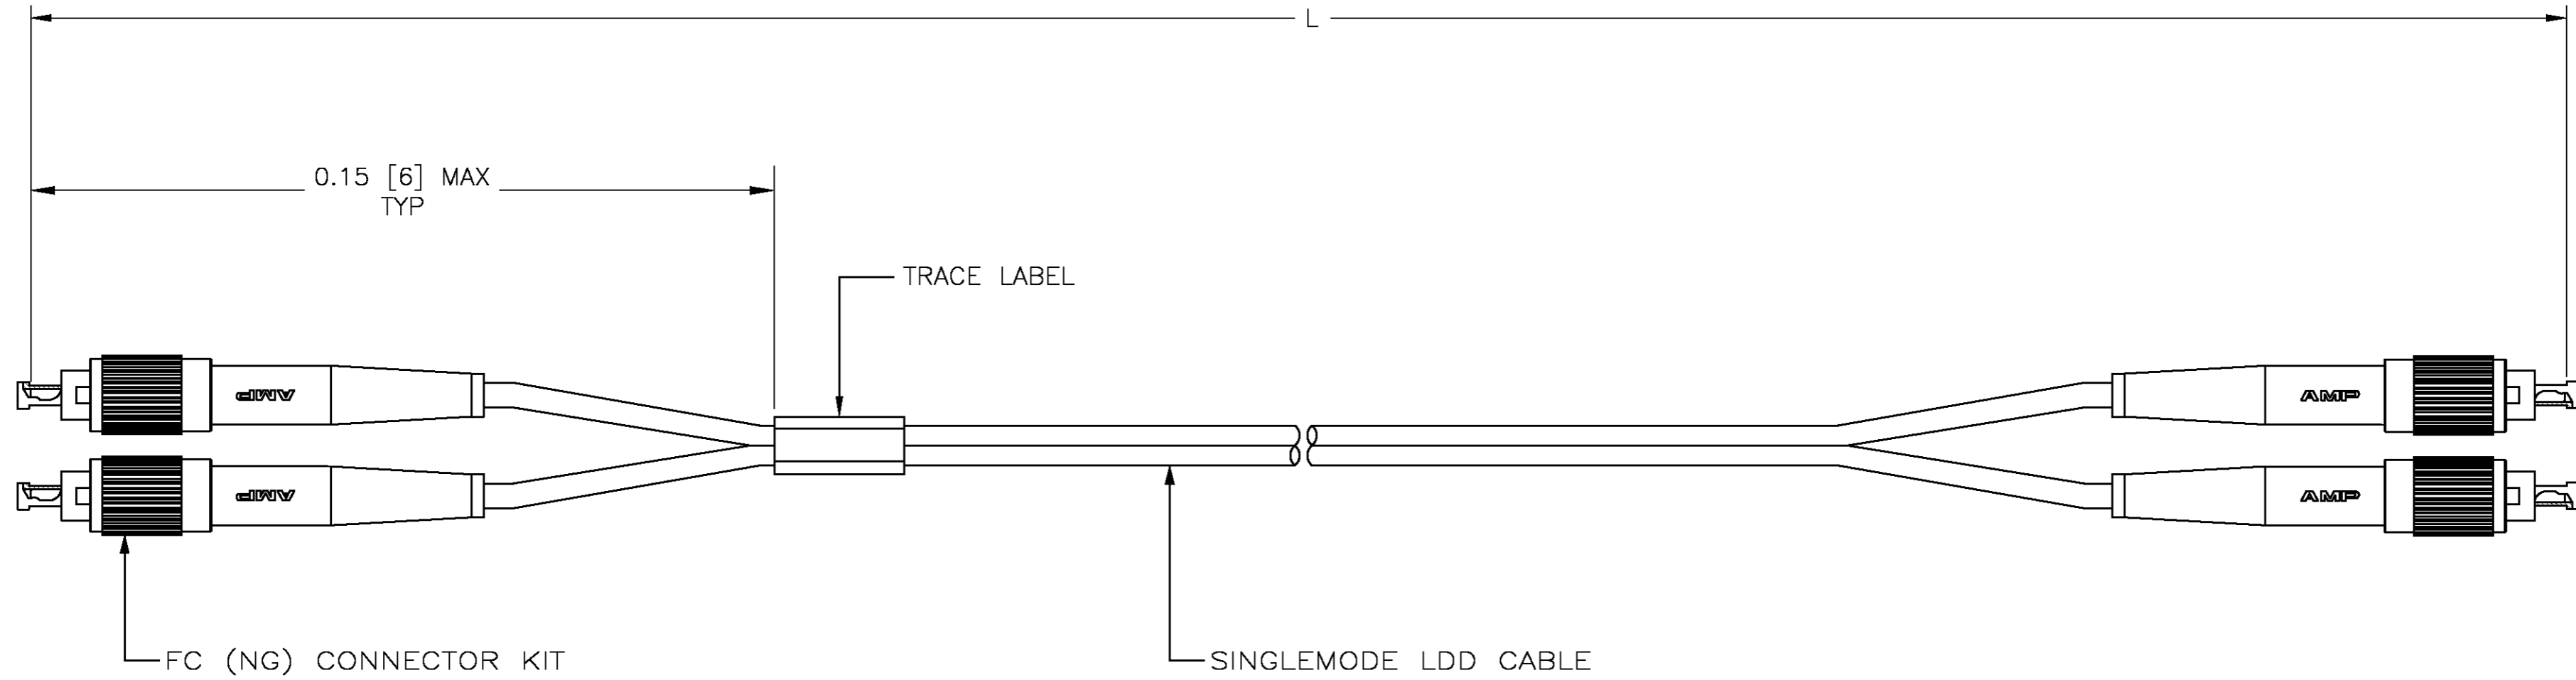

60±0.6 [2362±24]	1-5492022-1
40±0.4 [1575±16]	1-5492022-0
6.0±0.08 [236.22±3.15]	5492022-9
30±0.3 [1181±12]	5492022-8
20±0.3 [787±12]	5492022-7
15±0.15 [591±6]	5492022-6
10±0.15 [394±6]	5492022-5
5±0.08 [197±3]	5492022-4
3±0.05 [118±2]	5492022-3
2±0.05 [79±2]	5492022-2
1±0.05 [39±2]	5492022-1
L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S. VASU 27 JAN 08		
DIMENSIONS: METERS[INCHES]		CHK J. DUNCAN 27 JAN 08		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. DUNCAN 27 JAN 08	NAME CABLE ASSEMBLY, FIBER OPTIC, SINGLEMODE LDD FC(NG) TO FC(NG), OPTIMATE	
0 PLC ± -		PRODUCT SPEC	SIZE	RESTRICTED TO
1 PLC ± -		APPLICATION SPEC	CAGE CODE	
2 PLC ± -			DRAWING NO	
3 PLC ± -			A2 00779	
4 PLC ± -			C=5492022	
ANGLES ± -		WEIGHT	SCALE	SHEET
MATERIAL			1:1	1 OF 1
FINISH		CUSTOMER DRAWING	REV	A1