VIEW ON MATING SIDE

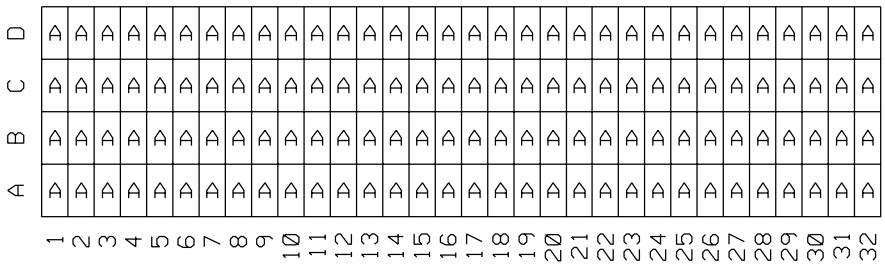

A = 128 STANDARD CONTACTS L=2

Marking	Standard
Performance level	G2/0 = Contact area perform. level 2 / Termination tin
Flux proof	no
Fixing clip	no
Dimensions	SDA-85015-0001
Technical Data	PS-85013-0002

A	G2/0	a1-32 b1-32 c1-32 d1-32
Contact symbol	Perform. level	Contact position number

REVISE ONLY ON CAD SYSTEM | SH. | REV.

CADCAM PROJECT NAME s8501500 s31

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE
128 pos. Male connector acc. DIN 41612 style R contacts arrangement

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ±2°

	INCH	METRIC
3 PLACE	± .	±
2 PLACE	± .	±
1 PLACE	± .	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DESIGN DIMENSION ☐ MM ☐ IN.

EQUIVALENT DIMENSION ☐ MM ☐ IN.

IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY

DRWG BY Ca | SIGN
CHK'D BY KN | SIGN
APP'D BY FB | SIGN
SCALE

molex MOLEX EUROPE

SHEET NO. 1 OF 1 | DATE 98/04/28

PART NO. 85015-0036 | DWG NO. SDA-85015-0036 | SIZE A

REVISIONS

LTR	FOR PREVIOUS REVISIONS SEE MRI LIST
A	first release ECN No. MG1998-2790