view shown without plastic pin and grounding

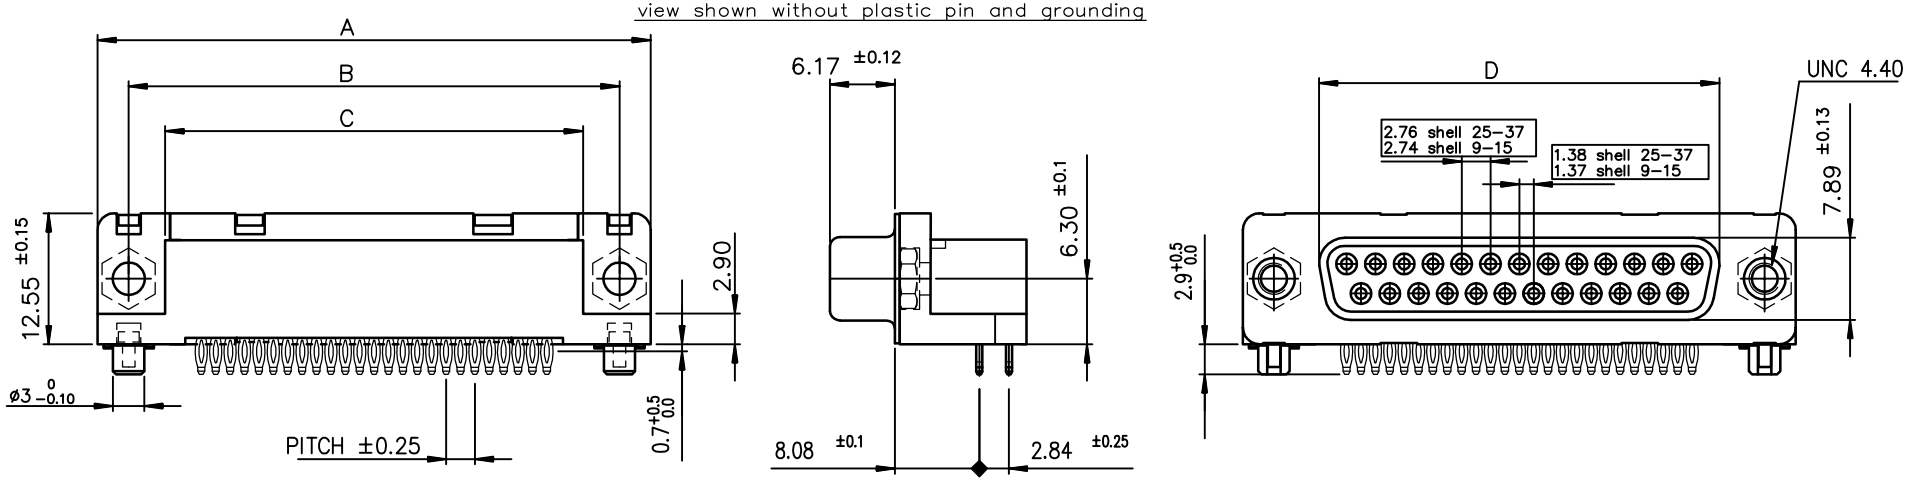

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.25 mm)

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	TIN LEAD PART NUMBER	TIN LEAD PART NUMBER	LEAD FREE PART NUMBER	LEAD FREE PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C4GX00	D09S80C6GX00	D09S80C4GX00LF	D09S80C6GX00LF
15	39.14	33.32	26.32	24.54	19.18	D15S80C4GX00	D15S80C6GX00	D15S80C4GX00LF	D15S80C6GX00LF
25	53.03	47.04	40.04	38.25	33.12	D25S80C4GX00	D25S80C6GX00	D25S80C4GX00LF	D25S80C6GX00LF
37	69.32	63.50	56.50	54.71	49.68	D37S80C4GX00	D37S80C6GX00	D37S80C4GX00LF	D37S80C6GX00LF
						Gold flash	0,76 » gold	Gold flash	0,76 » gold

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01−8646−0001

Detail of grounding strip



mat'l. code	surface ISO 1302	tolerance ISO 406 ISO 1101	projection
−	tolerances unless otherwise specified		
ltr / ecn no / dr / date	angles	linear	MM
H / ELX−I−17859 / MP / 2014/06/06	0°±2°	.0±.1 / .00±0.1 / .000±0.1	scale 2:1

dr	PESSON	1995/03/10
engr	MITHUN PAUL	2014/06/06
chr	ALIAS BABU	2014/06/06
appd	BIJU K PAUL	2014/06/06

sheet index	revision	sheet
	H	1

product family: D−SUB

title: FEMALE CONNECTOR DELTA D
RIGHT ANGLED PRESS FIT

dwg no: C01−8646−0174 | sheet 1 of 1 | size A3

type: Product Customer Drawing

FCIconnect.com
Copyright FCI
form: A3
Printed: Jun 09, 2014
STATUS:Released
PDS: Rev :H