


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/10/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

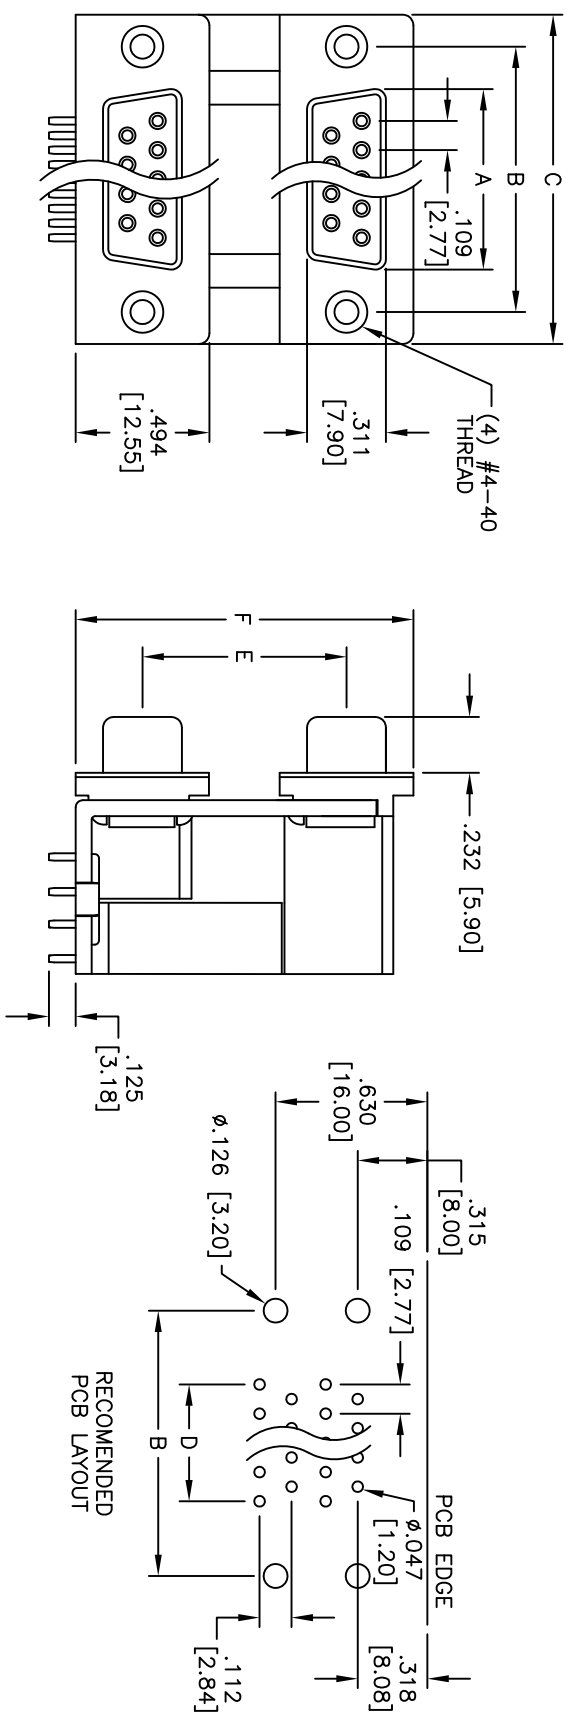

	PORT SPACING		PLUG DIMENSIONS			
	A1	B1	A	B	C	D
A1	.900 [22.86]	.750 [19.05]	.900 [22.86]	.984 [24.99]	1.394 [35.41]	.436 [11.08]
B1	.750 [19.05]	.625 [15.88]	.750 [19.05]	1.312 [33.32]	1.541 [39.14]	.763 [19.39]
C1	.625 [15.88]	.625 [15.88]	.625 [15.88]	1.852 [47.04]	2.088 [53.04]	1.309 [33.24]
				2.500 [63.50]	2.729 [69.32]	1.963 [49.86]

POSITIONS	DIMENSIONS			
	A	B	C	D
9	.643 [16.33]	.984 [24.99]	1.213 [30.81]	.436 [11.08]
15	.971 [24.66]	1.312 [33.32]	1.541 [39.14]	.763 [19.39]
25	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]	1.309 [33.24]
37	2.160 [54.84]	2.500 [63.50]	2.729 [69.32]	1.963 [49.86]

**SPECIFICATIONS:**

Material: Insulator: PBT, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Shell: Steel, Zinc plated  
 Plating: Gold flash over Nickel underplate overall  
 Electrical: Operating voltage: 250 VAC max.  
 Current rating: 5 Amps max.  
 Contact resistance: 20 mohms max. initial  
 Insulation resistance: 5,000 Mohms min.  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Temperature Rating: Operating temperature: -65°C to +125°C  
 Environmental: Lead free, RoHS compliant



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL PORT D-SUB, FEMALE / FEMALE  
 .126 [3.20] THROUGH HOLES

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X ± .10	ØXX ± .10	.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010	DATE	
APPROVALS	DATE	TITLE	
DRAWN	SS	6/10/05	
CHECKED		SIZE PART NO.	
APPROVED		X X DPD-XX-00-X1	
		SCALE: NTS	SHEET 1 OF 1