


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/27/05	
A		CHANGED TERMINALS	9/02/09	
B		CHANGED TERMINALS	5/06/11	

APPROVED: _____
 DATE: _____ TITLE: _____

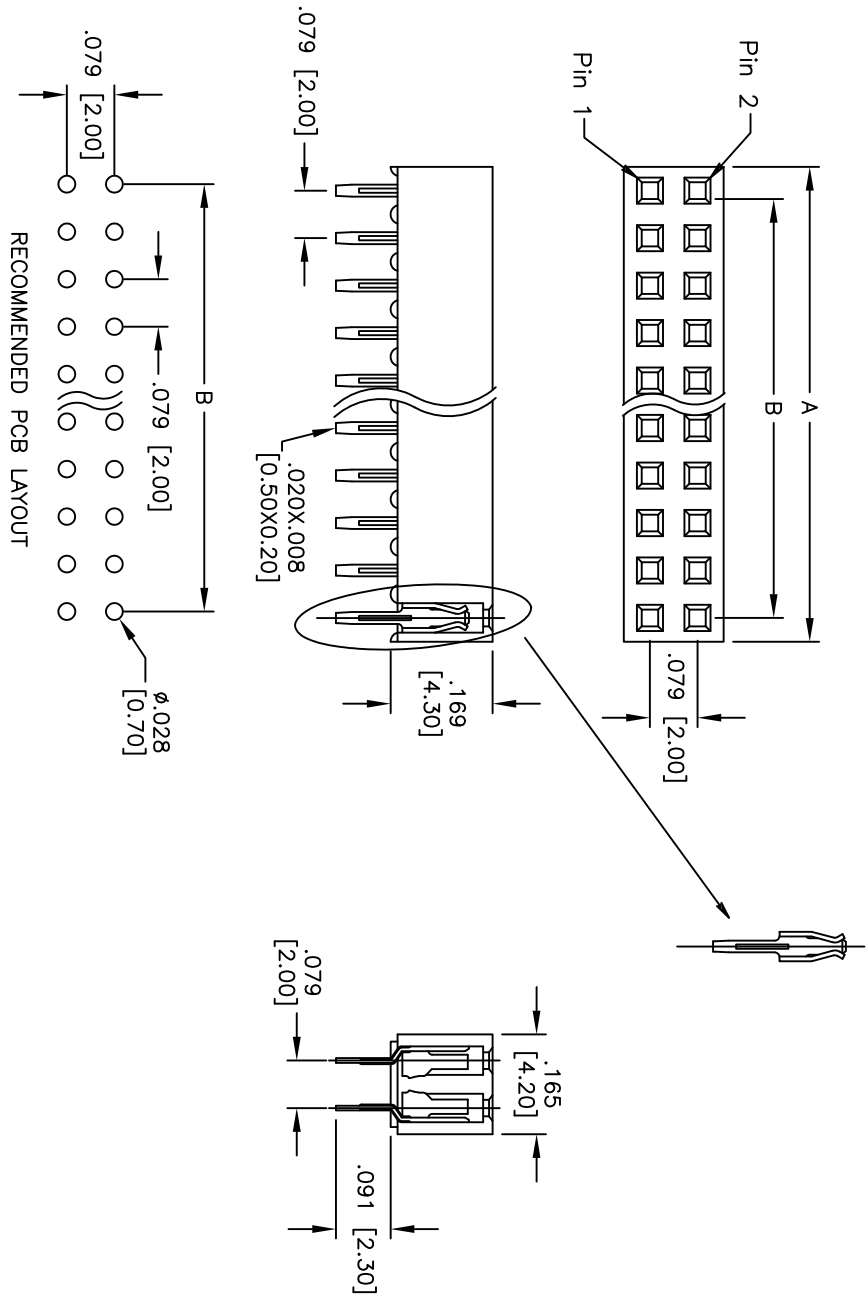

Positions: 02 thru 80
 A = .079 [2.00] x No. of Positions per Row
 B = .079 [2.00] x No. of Spaces

SPECIFICATIONS:
 Material: Insulator: Nylon, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate overall
 Electrical: Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. Initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE	
INCHES	HOLES	.079 x .079 DUAL ROW RECEPTACLE STRIP	
.X ± .10	Ø.X ± .10	.169 [4.30] HEIGHT, GOLD PLATED	
.XX ± .020	Ø.XXX ± .015		
.XXX ± .015	Ø.XXX ± .010		
APPROVALS	DATE		
DRAWN	SS	5/27/05	
CHECKED			
APPROVED			
SIZE	PART NO.	2RS2-XX-G	
X		SCALE: NTS	
REF: S00059T		SHEET 1 OF 1	
			REV. B

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710