


Specifications:  
 Current Rating:4A  
 Voltage Rating:250V AC/DC  
 Contact Resistance:10m ohm. Max.  
 Insulation Resistance:100M ohm. Min.  
 Operating Temperature Range:-25°C ~ +85°C


Material and Finish  
 Insulator:Nylon (UL94V-0)  
 Contact:Brass,Gold Plated  
 Coupling Screw:Brass,Nickel Plated  
 Outer Shell:Nylon Black  
 Mechanical Performance  
 Waterproof Rate:IP67  
 Application Cable OD:4~6mm

How to Order  
 M12-R-XXS-A-AE4


Assembly Screw Type  
 A Code  
 Socket  
 No of Positions(4~5)  
 R/A Type  
 M12

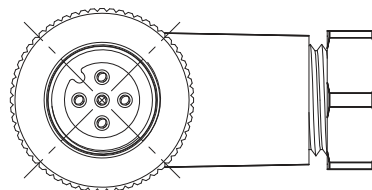



Pin Assignments Front View



4Pin



5Pin

				DRAWN: Joy Liu	GENERAL TOLERANCE: .X=±0.30 .XX=±0.25	 ON-SHORE TECHNOLOGY, INC.
E				CHECKED: Andrew	UNIT: MM	
D				APPROVAL: Bill He	SCALE: 1:1	DESCRIPTION: M12 4PIN SOCKET A CODE R/A ASSEMBLY SCREW TYPE
C					SHEET: 1/1	PART NO: M12-R-XXS-A-AE4
B				PROJECTION: 		
A	14-Feb-2020		Joy Liu			
REV	DATE	FILE	BY			

A

B

C

D