


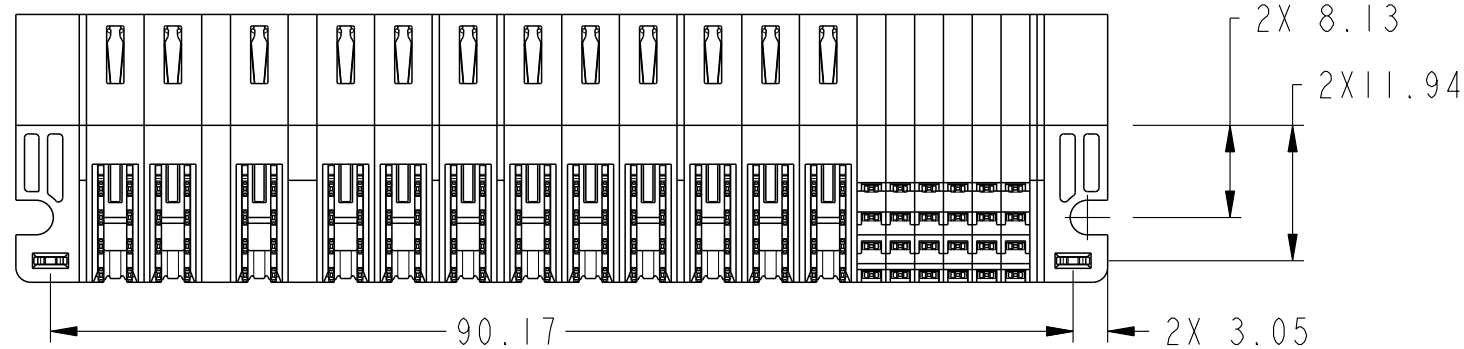
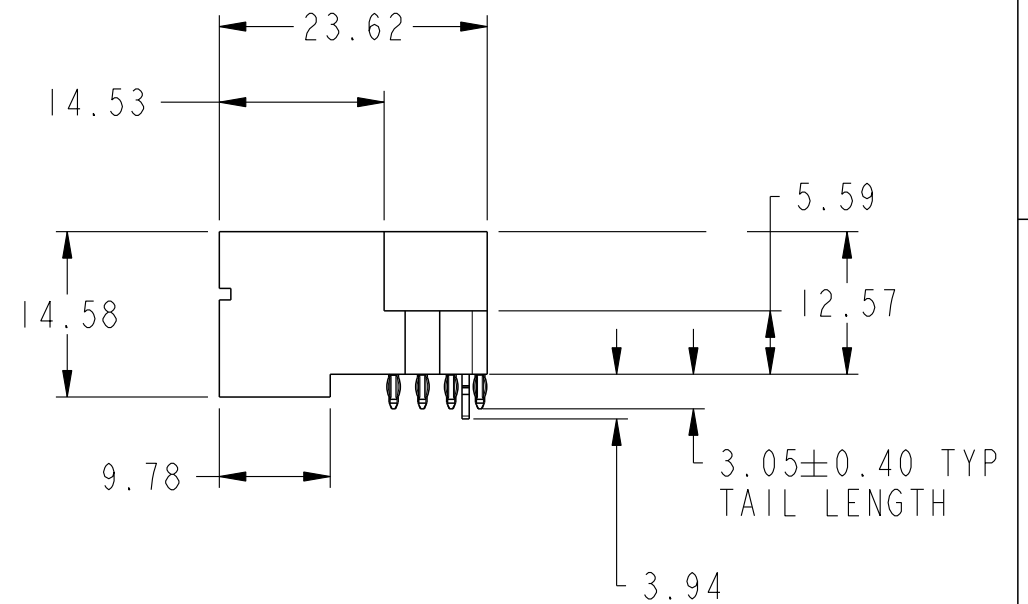


PRODUCT NUMBER SEE SHEET 2

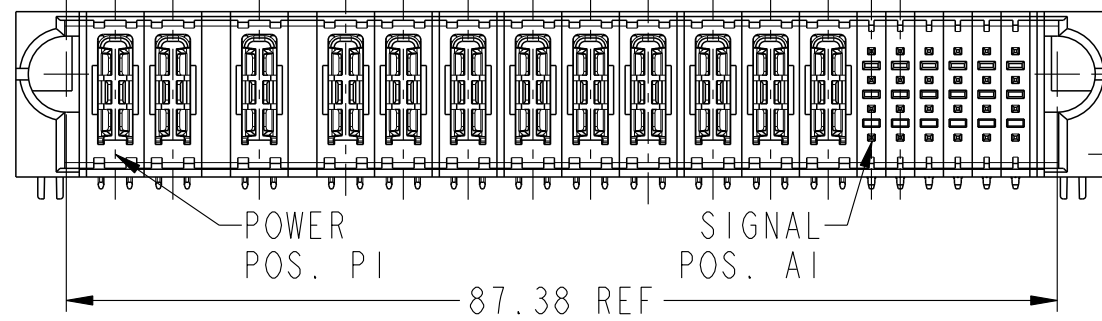

spec ref	*	dr	Bob Xie	2013/06/26	projection	MM	size	A3	scale	3:2	
tolerance std	ASME Y14.5	eng	Zhen-Hua Liu	2015/10/14			ecn no	ELX-DG-22145-1			
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Fancy Zhang	2015/10/16			product family	PwrBlade+	rel level	Released	
surface	<input checked="" type="checkbox"/> linear <input type="checkbox"/> angular	appr	Pei-Ming Zheng	2015/10/16			title	12P+24S		rev	B
ASME Y14.5	0.X ±0.5 0.XX ±0.25 0.XXX ±0.10 0° ±2°	www.fci.com		cat. no.	Product - Customer Drw		dwg no	10106263-C006002		sheet 1 of 3	

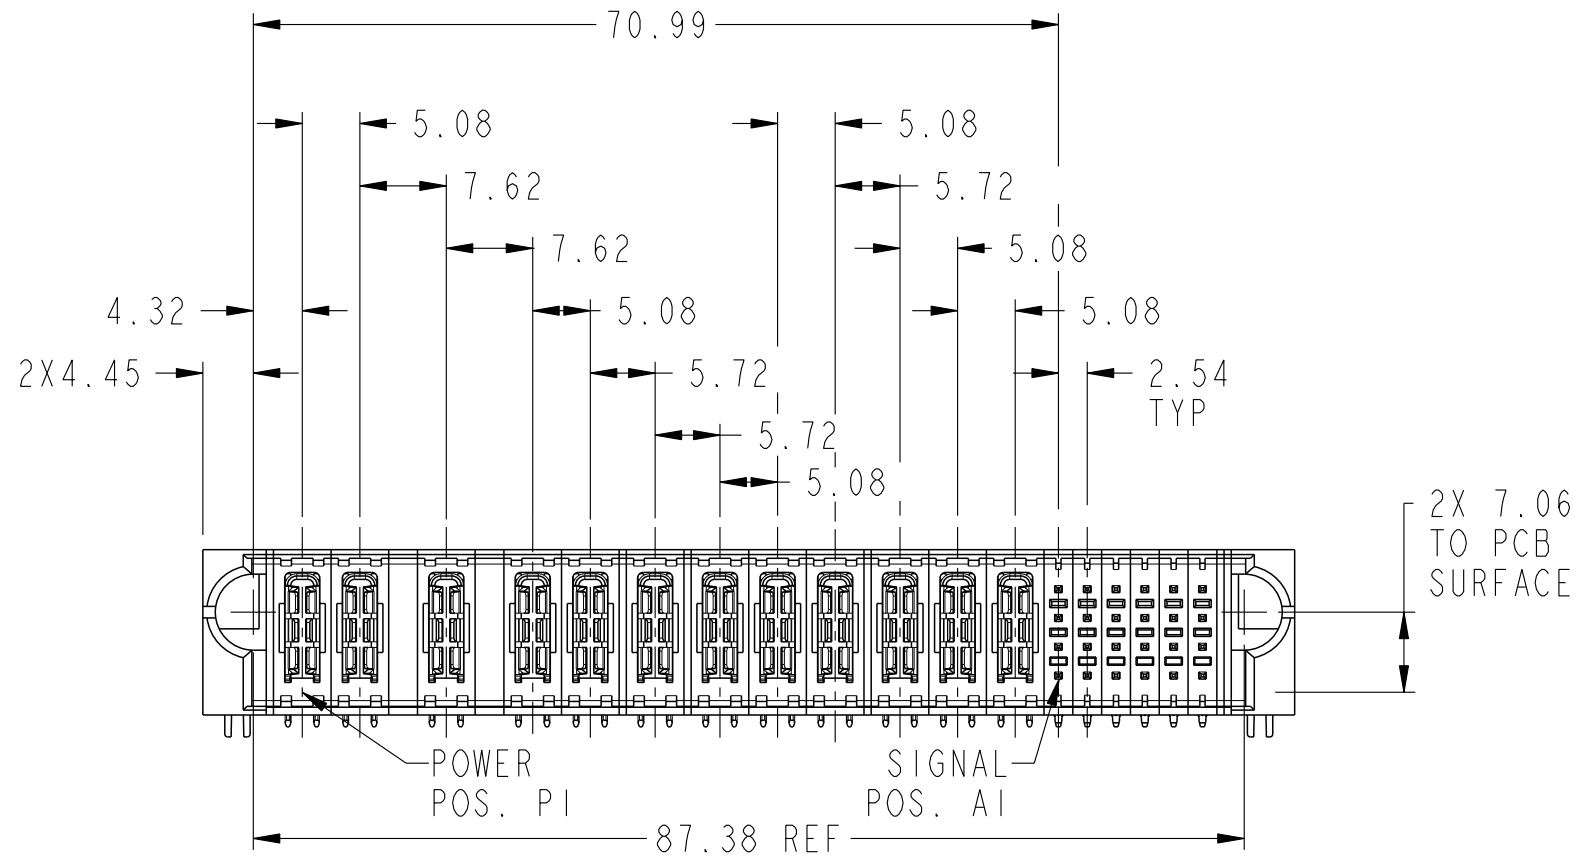

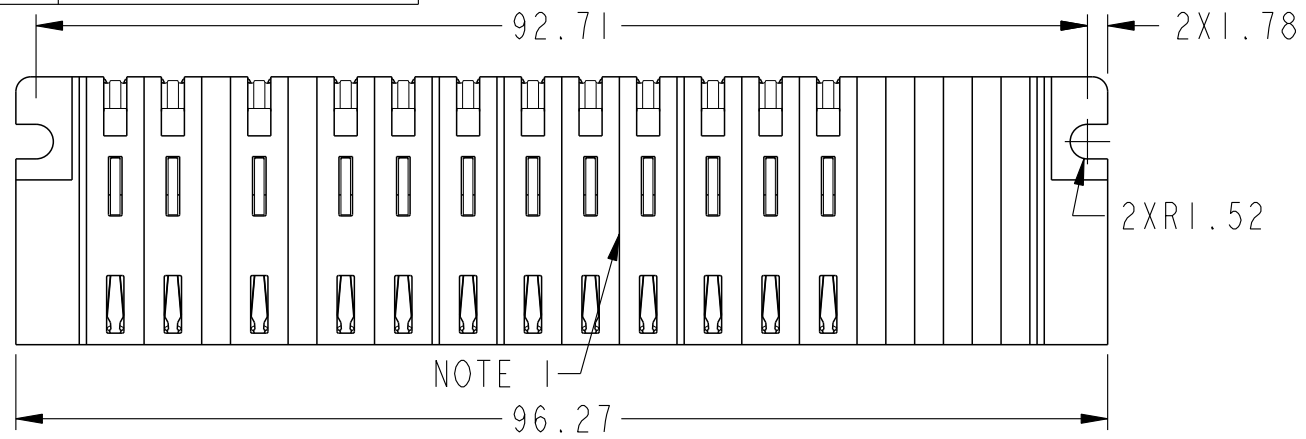


Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC BLACK, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION :GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.



Copyright FCI.

dr	Bob Xie	2013/06/26	projection 	MM 	size	A3	scale	3:2	
eng	Zhen-Hua Liu	2015/10/14			ec n no	ELX-DG-22145-1			
chr	Fancy Zhang	2015/10/16			product family	PwrBlade+		rel level	Released
appr	Pei-Ming Zheng	2015/10/16					title	12P+24S	
www.fci.com			cat. no.	Product - Customer Drw		dwg no	10106263-C006002	rev	B
			sheet 3 of 3						