


Directive 2002/95/EC RoHS compliant

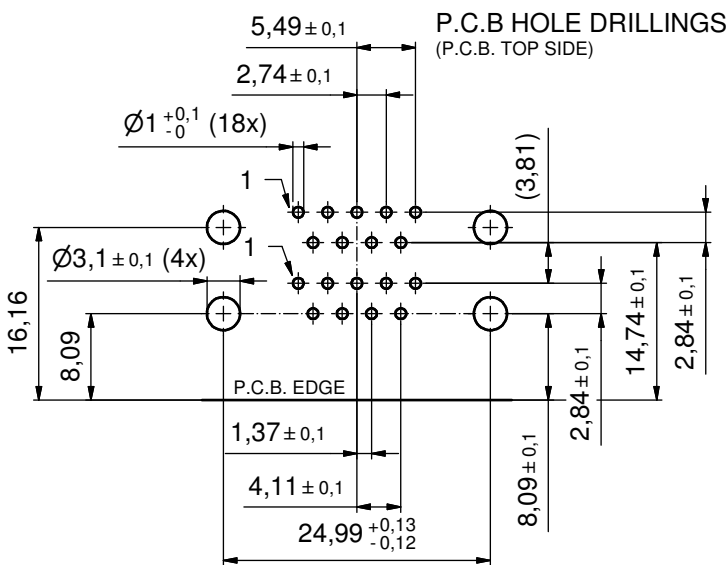

NOTES:

- METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY; PLATING (SEE PART NO):
 - PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
 - PLEASE ADD B for 20µm HARD GOLD over min. 50µm NICKEL
 - PLEASE ADD C for 30µm HARD GOLD over min. 50µm NICKEL
- METAL BRACKETS: ZINC DIE CAST; 300µm COPPER/40-120µm NICKEL/120-200µm TIN
- THREADED LOCKS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
- FIXING PLATE: PBT GF UL 94 V-0, BLACK
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKET: 163 □ 15359X CONEC ABC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	finish:	tolerance		scale: 2:1
			dim. in mm	material: SEE NOTES
		date	name	title:
		drawn 23.07.13	Henneboel	D-SUB DUAL PORT 15,88mm
	appd. 23.07.13	Koch	9pos. MALE / 9pos. MALE	
	norm		threaded lock, metal plate and fixing plate	
	d-old		dwg no:	
a Original			16K1A3288	DIN-A3
rev. description date name			part no: 163 □ 15359X (see note 3)	sh: 1

Directive 2002/95/EC RoHS compliant

CONEC