

## SFP 1-20/120AC


Order No.: 2856702



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2856702>

DIN rail module with device surge protection type 3 and mains suppression filter against high-frequency interference voltages. Integrated power display switches off automatically when there is a malfunction due to overload. Mounting on NS 35.

### Commercial data

GTIN (EAN)	 4 017918 952648
sales group	J041
Pack	1 pcs.
Customs tariff	85363010
Catalog page information	Page 230 (TT-2011)

### Product notes

WEEE/RoHS-compliant since:  
06/23/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Product description

Device protection with interference filter

## Technical data

### Standards

Housing material	ABS, aluminum
Inflammability class according to UL 94	V0
Color	aluminum
Standards for air and creepage distances	DIN VDE 0110-1
	IEC 60664-1: 1992-10
	IEC 61643-1
Surge voltage category	III
Pollution degree	2
Degree of protection	IP20
Design	Rail-mountable module, one-piece
Mounting type	DIN rail: 35 mm
Number of positions	2
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (operation)	-25 °C ... 40 °C
For country-specific use in	USA, CN, BR
Direction of action	L-N & L(N)-PE
Width	112.00 mm
Height	79.00 mm
Length	93.00 mm

### Protective circuit

IEC category	III
	T3
EN type	T3
Nominal voltage $U_N$	120 V AC
Arrester rated voltage $U_C$ (L-N)	150 V AC
Arrester rated voltage $U_C$ (L-PE)	150 V AC
Nominal frequency $f_N$	50 Hz
	60 Hz
Nominal current $I_N$	20 A (40°C)
Operating effective current $I_C$ at $U_C$	≤ 10 mA
Ground conductor current $I_{PE}$	≤ 0.5 mA
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (L-N)	3 kA

Nominal discharge surge current $I_n$ (8/20) $\mu$ s (L-PE)	3 kA
Max. discharge surge current $I_{max}$ (8/20) $\mu$ s maximum (L-N)	10 kA
Max. discharge surge current $I_{max}$ (8/20) $\mu$ s maximum (L-PE)	10 kA
Combined surge $U_{oc}$	6 kV (3 kA)
Energy absorption symmetrical	170 J
Energy absorption, asymmetrical	2x 170 J
Protection level $U_p$ (L-N)	$\leq 450$ V (at 6 kV/3 kA)
Protection level $U_p$ (L-PE)	$\leq 450$ V (at 6 kV/3 kA)
Protection level $U_p$ (N-PE)	$\leq 450$ V (at 6 kV/3 kA)
Residual voltage at $I_n$ , (L-N)	$\leq 450$ V
Residual voltage at $I_n$ , (L-PE)	$\leq 450$ V
Residual voltage at $I_n$ , (N-PE)	$\leq 450$ V
Response time $t_A$ (L-N)	$\leq 25$ ns
Response time $t_A$ (L-PE)	$\leq 25$ ns
Response time $t_A$ (N-PE)	$\leq 25$ ns
Inductivity in series	2x 1 mH $\pm 30$ % (with current compensation)
Capacity (L-N)	2 $\mu$ F $\pm 10$ % (X2, FOW X2-250V)
Capacity (L-PE)	2.2 nF $\pm 20$ % (Y, FOW X2-250V)
Capacity (L-PEN)	2.2 nF $\pm 20$ % (Y, FOW X2-250V)
Max. required back-up fuse	20 A (gL / gG)
	20 A (MCB, > 125 V, AIC: 14 kA)
Input attenuation aE, sym.	Typ. 40 dB ( $\geq 500$ kHz / 50 $\Omega$ )
Input attenuation aE, asym.	Typ. 30 dB ( $\geq 1$ MHz / 50 $\Omega$ )
Message: Surge protection fault	Remote indicator contact

**Non-heating apparatus connection, power supply**

Connection name	Input/output
Connection method	Screw terminal blocks
Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Connection method	3-conductor (shielded)
Screw thread	M3
Stripping length	8 mm
Conductor cross section stranded min.	4 mm <sup>2</sup>

Conductor cross section stranded max.	4 mm <sup>2</sup>
Conductor cross section solid min.	4 mm <sup>2</sup>
Conductor cross section solid max.	6 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	12
Conductor cross section AWG/kcmil max	10

#### Remote indicator contact

Connection name	Remote fault indicator contact
Switching function	PDT contact
Connection method	Pluggable screw connection
Screw thread	M2
Tightening torque	0.25 Nm
Stripping length	7 mm
Conductor cross section stranded min.	0.14 mm <sup>2</sup>
Conductor cross section stranded max.	1.5 mm <sup>2</sup>
Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	1.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	28
Conductor cross section AWG/kcmil max	16
Maximum operating voltage U <sub>max.</sub> AC	250 V AC
Max. operating current I <sub>max</sub>	1 A (250 V AC)
	0.25 A (250 V DC)
	1 A (48 V DC)
Min. permissible switching capacity	(1.00 A / 48 V DC)
	(100 mA / 12 V AC)
Switching capacity max. perm.	(0.25 A / 250 V DC)
	(1.0 A / 48 V AC)

#### Connection, protective circuit

Standards/regulations	IEC 61643-1
	EN 61643-11/A11

#### Protective circuit, filter

Discharge resistor	≤ 390 kΩ
Clamping voltage ringwave (L-N)	100 V (category A 100 kHz 6 kV/200 A)
	195 V (category B 100 kHz 6 kV/500 A)

Clamping voltage ringwave (L-PE)	390 V (category A 100 kHz 6 kV/200 A)
	390 V (category B 100 kHz 6 kV/500 A)

**Certificates / Approvals**




Certification


CSA, CSAus-COMP, CUL, GOST, UL

**Diagrams/Drawings**

Diagram

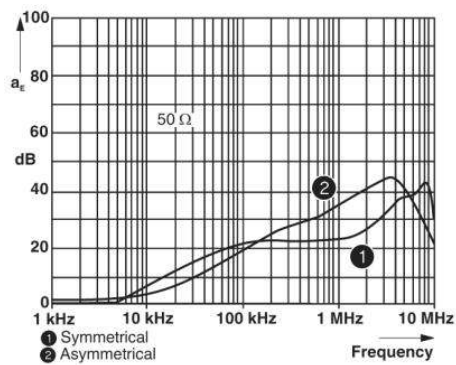


Dimensioned drawing

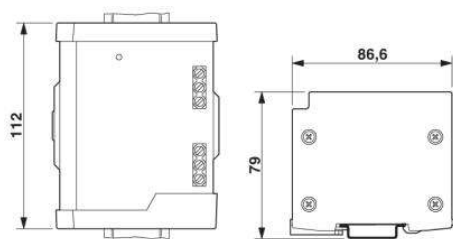

Circuit diagram

---

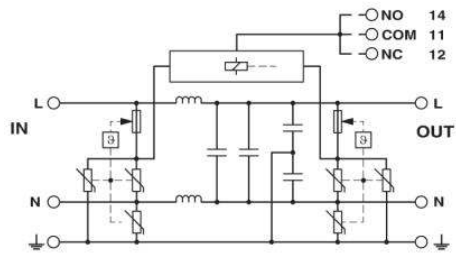

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;