


Data sheet | Item number: 787-2810

DC/DC Converter; 24 VDC input voltage; 5/10/12 VDC adjustable output voltage; 0.5 A output current; DC OK contact

www.wago.com/787-2810

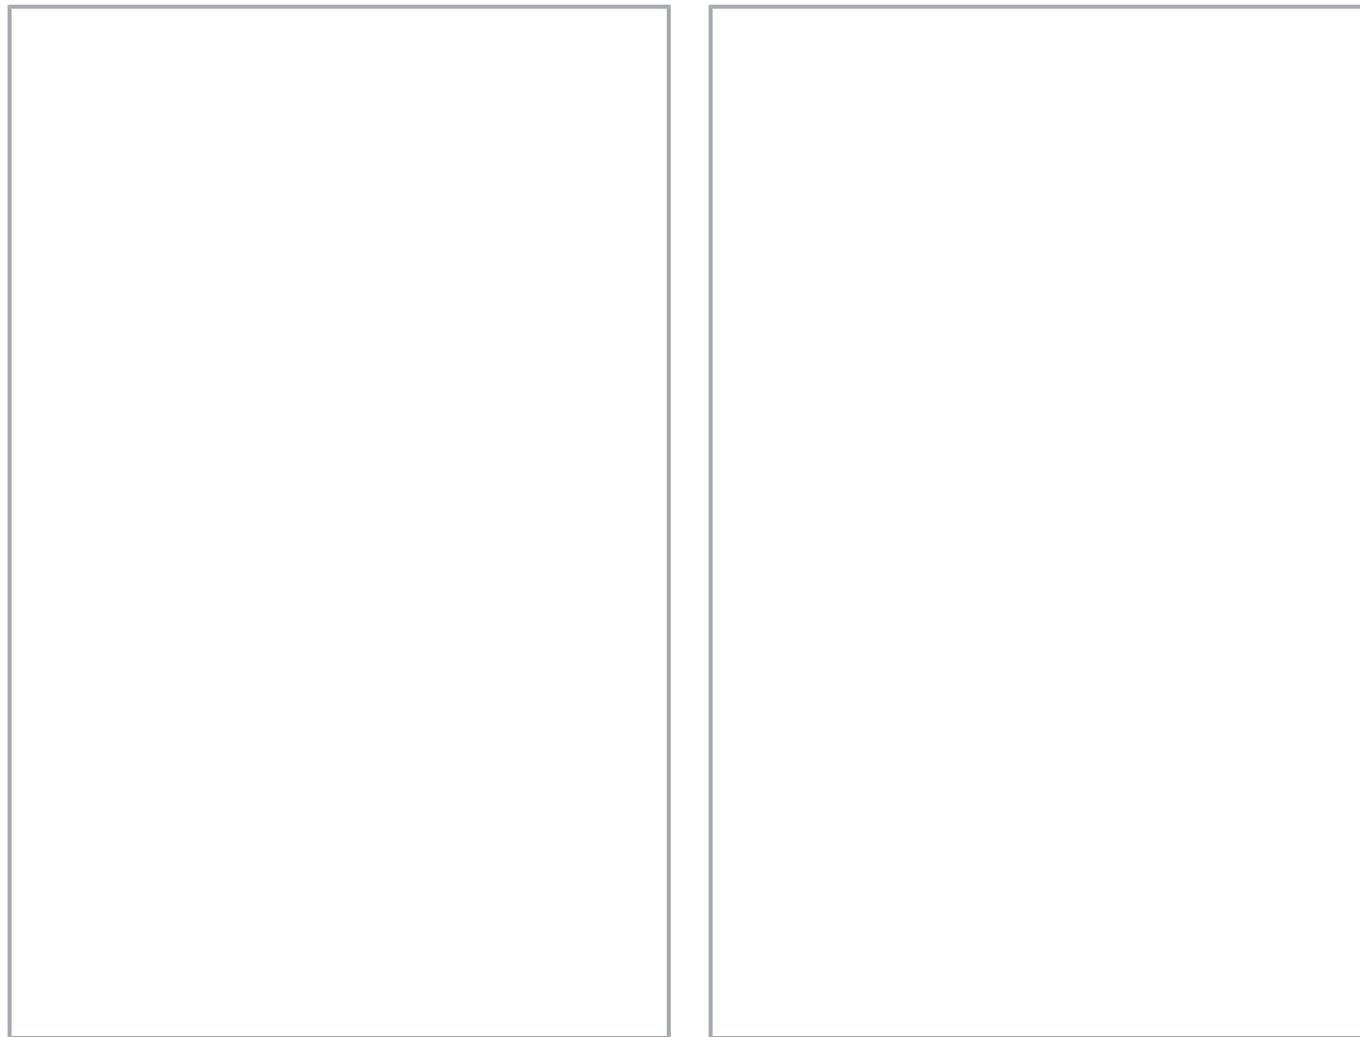

Subject to changes. Please also observe the further product documentation!


WAGO GmbH & Co. KG
Hansastra. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Features:

- DC/DC converter in a compact 6 mm housing
- DC/DC converters (787-28xx) supply devices with 5, 10, 12 or 24 VDC from a 24 or 48 VDC power supply with an output power up to 12 W.
- Output voltage monitoring via DC OK signal output
- Can be commoned with 857 and 2857 Series devices
- Comprehensive range of approvals for multiple applications

Data

Technical data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Input

Nominal input voltage $U_{i\text{ nom}}$	DC 24 V
Input voltage range	DC 15 ... 30 V
Nominal mains frequency range	0 Hz
Input current I_i	$\leq 0.5 \text{ A}$
Inrush current	$\leq 0.5 \text{ A}$ (at nominal input voltage)

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 5 / 10 / 12 V (Adjustable via DIP switch)
Output voltage range	$\pm 3 \%$
Nominal output current $I_{o\text{ nom}}$	0.5 A
Nominal output power	2.5 W
Deviation	$\leq 3 \%$
Residual ripple	$\leq 20 \text{ mV}$ (peak-to-peak)

Signaling and Communication

Signaling	1 x LED DC OK (green) 1 x Short circuit LED (red) 1 x Active signal output (U_i , max. 4 mA)
Operation status indicator	Green LED (U_o) Red LED (short circuit)

Efficiency/power losses

Power loss P_i	$\leq 0.21 \text{ W}; \leq 0.7 \text{ W}$ (nominal load)
Efficiency (typ.)	82.5 % (at nominal input voltage and nominal output)

Circuit protection

Internal fuse	No
---------------	----

Safety and protection

Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	yes
Pollution degree	2

Subject to changes. Please also observe the further product documentation!

Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	No
Series operation	No
MTBF	> 1,800,000 h

Connection data

Number of jumper slots	8
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 857 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	6 mm / 0.236 inches
Height	94 mm / 3.701 inches
Depth from upper-edge of DIN-rail	97.8 mm / 3.85 inches

Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

Material Data

Fire load	0.418 MJ
Weight	36.4 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	95% (no condensation permissible)
Derating	No derating
Climatic category	3K3 (per EN 60721; except for low air pressure)

Standards and specifications

Conformity marking	CE
--------------------	----

Subject to changes. Please also observe the further product documentation!

Standards/specifications	EN 61000-6-2 EN 61000-6-3 EN 60950-1 UL 61010-2-201
--------------------------	--

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	bag
Country of origin	DE
GTIN	4055143440745
Customs tariff number	85044083900

Environmental Product Compliance

CAS-No.	11120-22-2 1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance	Diboron trioxide Lead Lead monoxide Lead silicate
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	eabc3905-ffc5-4667-9155-f05b53673875
SCIP notification number (Belgium)	0adddd40-e104-4c72-ab7b-1d1debecdcb27
SCIP notification number (Bulgaria)	2338fea6-e376-4709-bd5d-70813548af58
SCIP notification number (Czech Republic)	a9ce542d-abc0-4b1f-9c23-01162ffb77ed
SCIP notification number (Denmark)	65351928-1118-4b60-8187-a66b7f4600a6
SCIP notification number (Finland)	24cd08db-1286-42fb-8732-484102a9d921
SCIP notification number (France)	51ad6168-048f-4d4f-a67c-7161b0440fe5
SCIP notification number (Germany)	18db0ecd-84a3-4e81-8e09-aec2199e33d4
SCIP notification number (Hungary)	e50bcb28-ed96-4031-a132-ccc833e6d2df
SCIP notification number (Italy)	110cb643-a819-4932-a51d-cdf356faed29

Subject to changes. Please also observe the further product documentation!

SCIP notification number (Netherlands)	f3c80b51-245f-442a-b193-968183274aea
SCIP notification number (Poland)	437bb647-6a14-4f72-a293-a2eb4e98b4de
SCIP notification number (Romania)	dc656d91-7c1a-4097-b447-dbe00e114880
SCIP notification number (Sweden)	538d88fe-495d-428b-9f4b-9493b7138130

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
EAC	Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC_Certificate_RU_C-DE.AM02.B.00115_19
UL	Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199 Vol3 Sec1

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Optional accessories

Tool

Operating tool	Item no.: 210-720 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured	www.wago.com/210-720
----------------	--	--

Marking accessories

Marking strip	Item no.: 2009-110 Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white	www.wago.com/2009-110
---------------	--	--

Marker

Item no.: 2009-115 WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white	www.wago.com/2009-115
---	--

Item no.: 793-501 WMB marking card; as card; not stretchable; plain; snap-on type; white	www.wago.com/793-501
--	--

Item no.: 793-502 WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white	www.wago.com/793-502
---	--

Item no.: 793-503 WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white	www.wago.com/793-503
--	--

Subject to changes. Please also observe the further product documentation!

Item no.: 793-504

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; www.wago.com/793-504
white

Item no.: 793-505

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; www.wago.com/793-505
white

Item no.: 793-506

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; www.wago.com/793-506
white

Item no.: 793-566

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; www.wago.com/793-566
white

Item no.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on www.wago.com/793-5501
type; white

Downloads**Documentation****Bid Text**

787-2810 pdf - Datei	2019 年6月24 日	pdf 92.1 kB	Download
787-2810 docx - Datei	2019 年6月24 日	docx 20.5 kB	Download
787-2810 X81 - Datei	2019 年2月19 日	xml 6.4 kB	Download

Instruction Leaflet

DC/DC-Wandler	V 1.1.1 2020 年3月31 日	pdf 2.4 MB	Download
---------------	-------------------------	---------------	--------------------------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 年8月18 日	pdf 2.2 MB	Download
---	-------------------------	---------------	--------------------------

CAD/CAE-Data**CAD data**

2D/3D Models 787-2810	URL	Download
-----------------------	-----	--------------------------

Subject to changes. Please also observe the further product documentation!

CAE data

EPLAN Data Portal 787-2810	URL	Download
ZUKEN Portal 787-2810	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-2810 DC/DC Converter; 24 VDC input voltage; 5/10/12 VDC adjustable output voltage; 0.5 A output current; DC OK contact	URL	Download
--	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastraße 27

32423 Minden

Phone: +49 571 887-0 | Fax: +49 571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.