



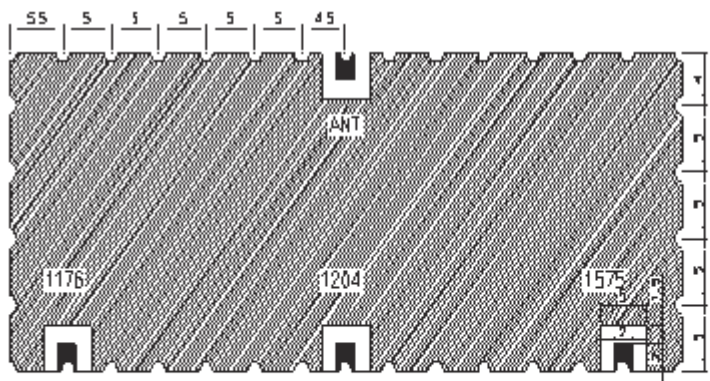

Ceramic Triplexer

Part Number: AM1176/1204/1575TR282

MULTIBAND	Low	Mid	High
Center frequency(Fo)	1176MHz	1204MHz	1575.42MHz
Bandwidth(BW)	20MHz	14MHz	20MHz
Insertion Loss(dB max)	4.5	4.5	3.0
Ripple in BW(dB max)	2.0	2.0	1.0
Return Loss in BW(dB max)	15.0	15.0	15.0
Attenuation@1166-1186 MHz		40dB	40dB
@1197-1211MHz	40dB		40dB
@1565.42-1585.42MHz	40dB	35dB	
Input Power	3.0 W max		
Nominal Characteristic Impedance	50 Ohm		

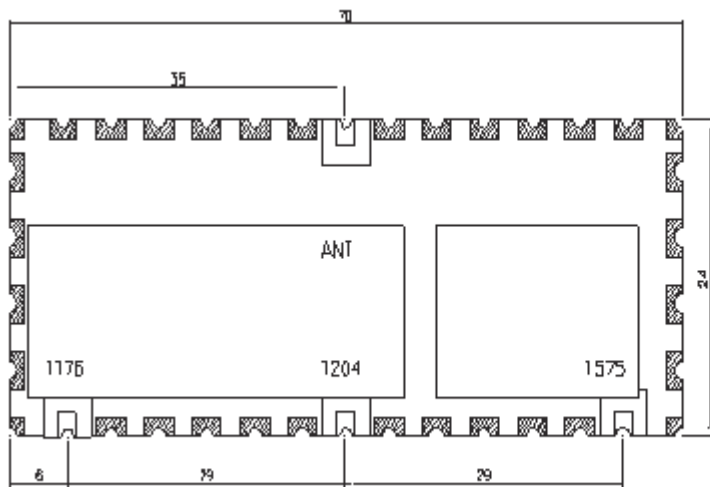

■ : I/O PORT
 ▨ : GROUND
 TOLERANCE UNLESS OTHERWISE SPECIFIED : ±0.3
 DIMENSIONS : mm