THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – , – .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR–16–013330	20APR2017	BW	RS

NOTES:

1. SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107–3275
2. 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107–3275
3. Ag PLATING
4. THIS ITEM MUST BE WHITE
5. REFERENCE INSTRUCTION SHEET : 411–3274

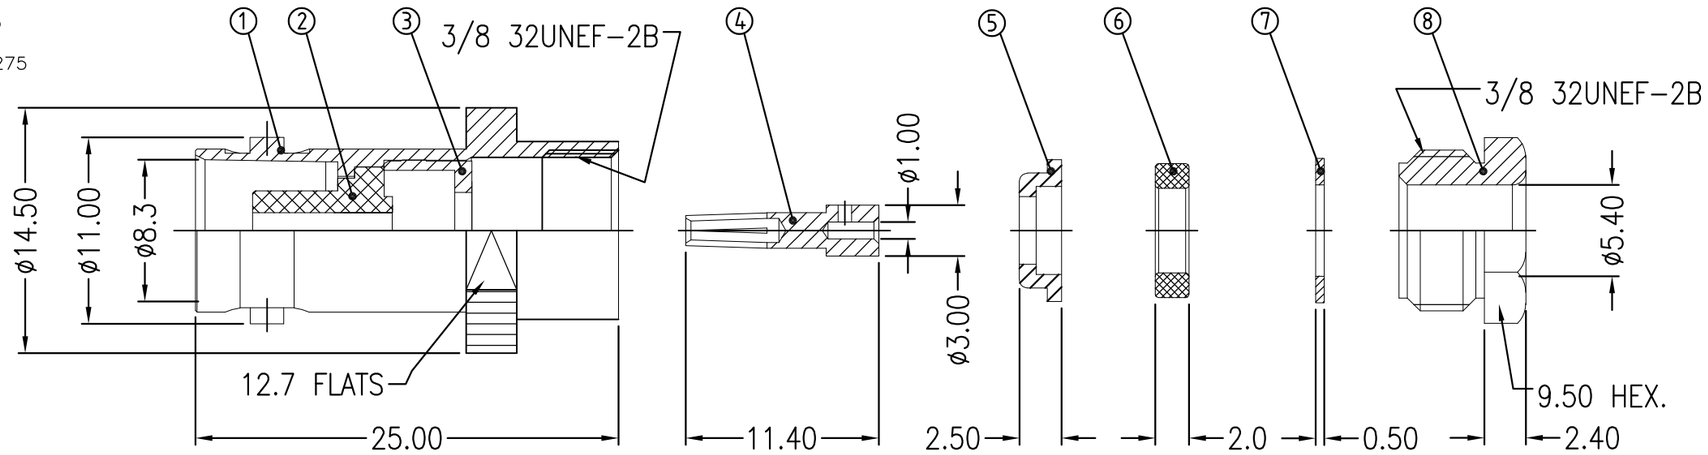



RECOMMENDED CABLE STRIPPING DIM'S

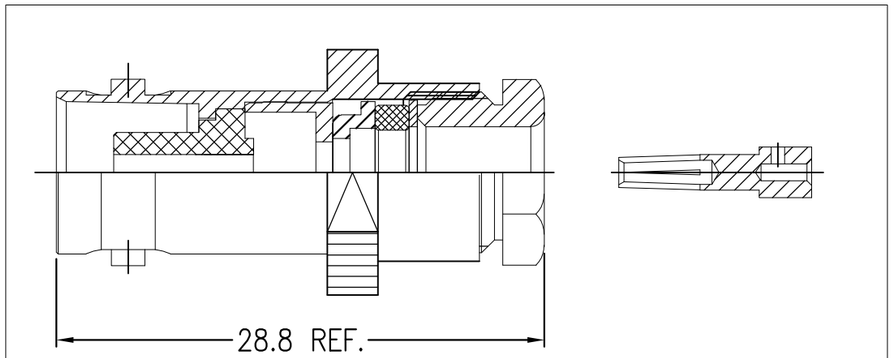

ASSEMBLY DIAGRAM

QUANTITY PER ASSY		PARTS LIST		
2	1			
6––0	1––0	MATERIAL	DESCRIPTION	ITEM
1	1	BRASS 3	NUT	8
1	1	BRASS 3	WASHER	7
1	1	SILICON RUBBER 4	GASKET	6
1	1	BRASS 3	LOCK RING	5
1	1	PHOSPHOR BRONZE 3	CONTAT	4
1	1	BRASS 3	RING	3
1	1	PTFE	INSULATION	2
1	1	BRASS 3	BODY	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN BILL WONG 20APR2017
CHK ROGER SONG 20APR2017
APVD ROGER SONG 20APR2017
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT 0

CUSTOMER DRAWING

TE Connectivity

NAME
BNC STRAIGHT JACK SOLDER(PS) RG58 50 OHM
–
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–1478409	—

SCALE	SHEET	REV
1:1	1 OF 1	C