

ITEM	PART#	DESCRIPTION	QTY	UOM
A, B	874390600	1.5mm Rcpt Hsg Nyl Nat 6Ckt	2	PC
C	874210000	1.5mm Rcpt Term Crim 2.5Sn	12	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B6	1X24AWG DISC SR-PVC BK UL10002	BLACK
A2	B5	1X24AWG DISC SR-PVC BK UL10002	BLACK
A3	B4	1X24AWG DISC SR-PVC BK UL10002	BLACK
A4	B3	1X24AWG DISC SR-PVC BK UL10002	BLACK
A5	B2	1X24AWG DISC SR-PVC BK UL10002	BLACK
A6	B1	1X24AWG DISC SR-PVC BK UL10002	BLACK

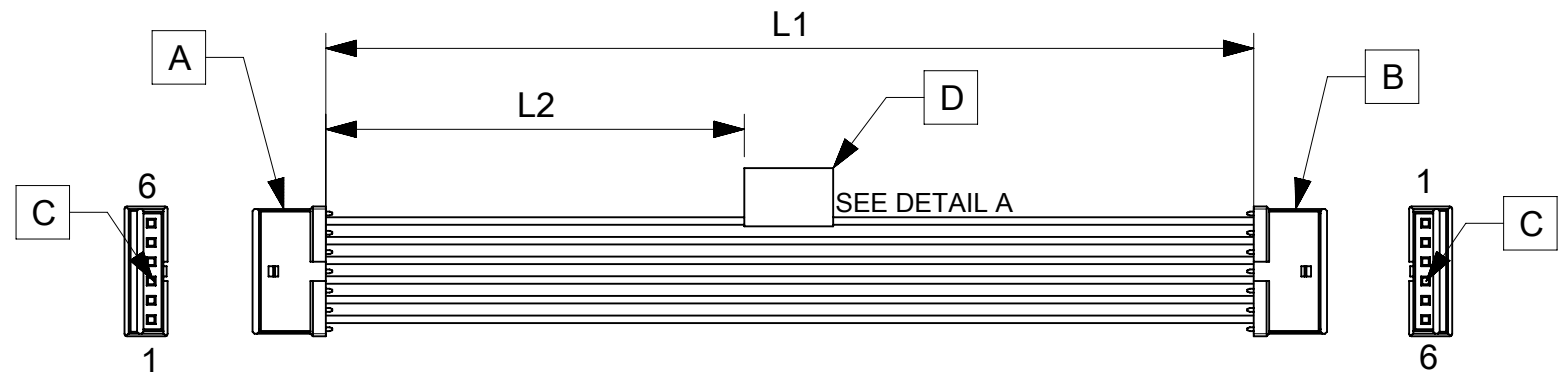


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2183961060	50±3	13	PICO-SPOX 1.5 R-R 6CKT 50MM DISC Sn
2183961061	100±5	38	PICO-SPOX 1.5 R-R 6CKT 100MM DISC Sn
2183961062	150±8	63	PICO-SPOX 1.5 R-R 6CKT 150MM DISC Sn
2183961063	300±10	138	PICO-SPOX 1.5 R-R 6CKT 300MM DISC Sn
2183961064	600±10	288	PICO-SPOX 1.5 R-R 6CKT 600MM DISC Sn

NOTES

1. Cable assembly must pass 100% for continuity and polarity.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
27/05/2021	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	DIMENSION UNITS: mm SCALE: NTS		CURRENT REV DESC:					
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 665607 DRWN: ARAJU 2021/05/27 CHK'D: RDESAI01 2021/05/31 APPR: RDESAI01 2021/05/31			SEE TABLE		
	ANGULAR TOL ± °		INITIAL REVISION:					
	4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±		DRWN: ARAJU 2021/05/27 APPR: RDESAI01 2021/05/31			PRODUCT CUSTOMER DRAWING		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING: A4-SIZE	SERIES: 218396	DOCUMENT NUMBER: 2183961060		DOC TYPE: PSD	DOC PART: 000
MATERIAL NUMBER: SEE TABLE		CUSTOMER: GENERAL MARKET		SHEET NUMBER: 1 OF 1				