


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16				
	D	ECR-14-011637	22AUG2014	HZ	RZ

- 1. SEE TABLE FOR MAXIMUM CONNECTOR INSERTION LOSS AT 1300nm
- 2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702

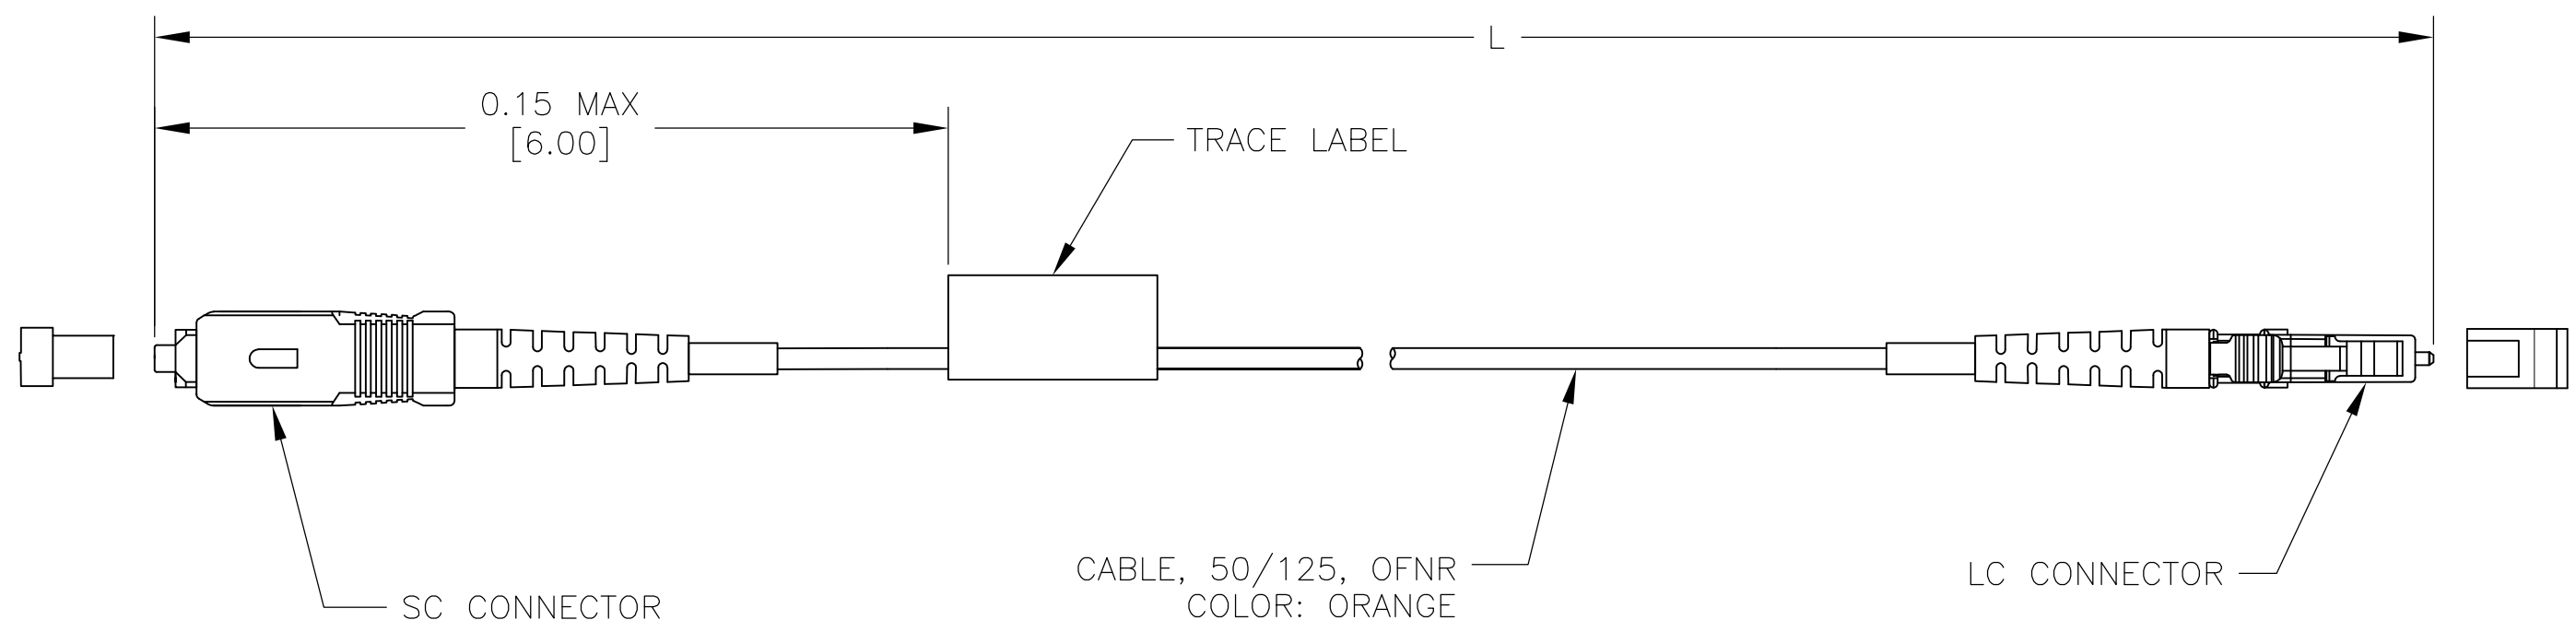

0.52	0.22	15.00±0.15 [591.0±6.0]	1-6374612-5
0.52	0.22	10.00±0.15 [393.7±6.0]	1-6374612-0
0.51	0.21	5.00±0.08 [196.9±3.0]	6374612-5
0.51	0.21	4.00±0.08 [157.5±3.0]	6374612-4
0.50	0.20	3.00±0.05 [118.1±2.0]	6374612-3
0.50	0.20	2.00±0.05 [78.7±2.0]	6374612-2
0.50	0.20	1.00±0.05 [39.4±2.0]	6374612-1
MAX IL (dB) SC	MAX IL (dB) LC	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S.VASU 02 SEP 05	<b>STE</b> TE Connectivity													
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 02 SEP 05														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.DUNCAN 02 SEP 05	NAME CABLE ASSY, FIBER OPTIC, 50/125um, 2.0mm OFNR, AMP SC (NG) TO LC, RoHS													
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	PRODUCT SPEC -	APPLICATION SPEC -	
0 PLC	± -															
1 PLC	± -															
2 PLC	± -															
3 PLC	± -															
4 PLC	± -															
ANGLES	± -															
MATERIAL -		FINISH -	WEIGHT -	RESTRICTED TO -												
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1												
			REV D													