# CC6360 TYPE 12
# COMPACT CABINET COOLER
# AIR-TO-WATER FLUSH-MOUNT MODEL

| Model | Weight | Rating @ 40°C ΔT BTU / hr | Amps Current Draw at 115 volts AC | Fan Size | Dimensions-Inches (H x W x D) |
|---|---|---|---|---|---|
| CC6360 | 32 lbs | 21,800 | 0.9 | 3 x 6" | 29 x 13-7/8 x 7-7/8 |

Efficiency: 159.7 Watts / °C ΔT based on average internal cabinet temperature.

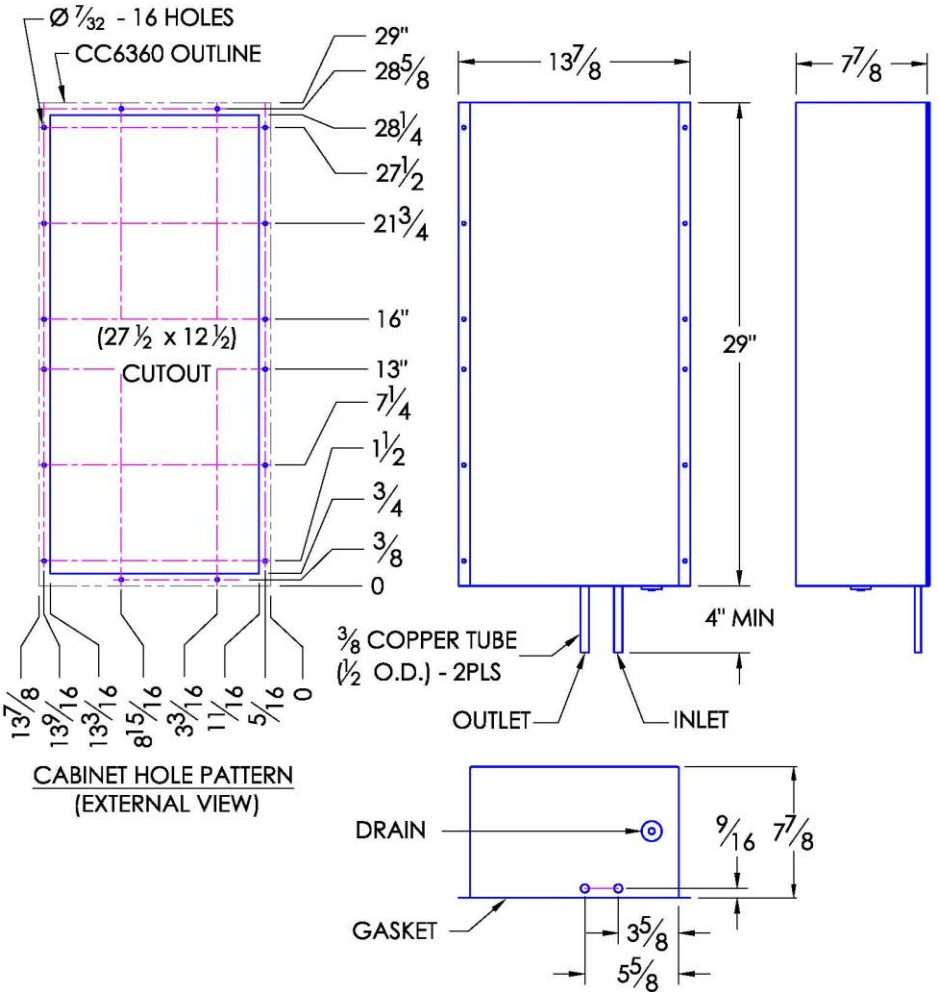

Outside View

Inside View

## SPECIFICATIONS

1. UL Listed for TYPE 12 environments.
2. CC6360 Rated cooling: 6,388 Watts mounted to an uninsulated 72" x 36" x 24" Cabinet with 1 GPM of water at 20°C, 40°C ambient air and 60°C cabinet air temperature.
3. Designed for surface mounting on the outside of cabinet.
4. Housing is aluminum (color is black).
5. External water inlet and outlet connections.
6. Equipped with mounting gasket to maintain air tight seal.
7. Available with AC (115 & 230V) and DC (12, 24, & 48V) fans. DC version includes junction box, consult website.
8. Vertical mounting only.
9. Coolant water pressure: Pressure tested to 100 psi. Safe working pressure is 60 psi.
10. Recommended coolant flow rate (gallons per minute): 1 GPM
11. **For design, quote, and sizing assistance: call (866) 936 - 6736.**

c UL us LISTED
*UL File #SA9567*

Proudly made in USA

BSI
*ISO 9001:2008*
*FM 554949*


NOREN
1010 O'Brien Drive
Menlo Park, CA 94025
650.322.9500
norenproducts.com


**CC6360 TYPE 12**

CCS-PBD-7.2.2-883345-B

Subject to change without notice.