



APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/30/05	
A		ADDED DIM.	11/3/11	
B		ADDED DIM. & SHAPE	6/6/12	

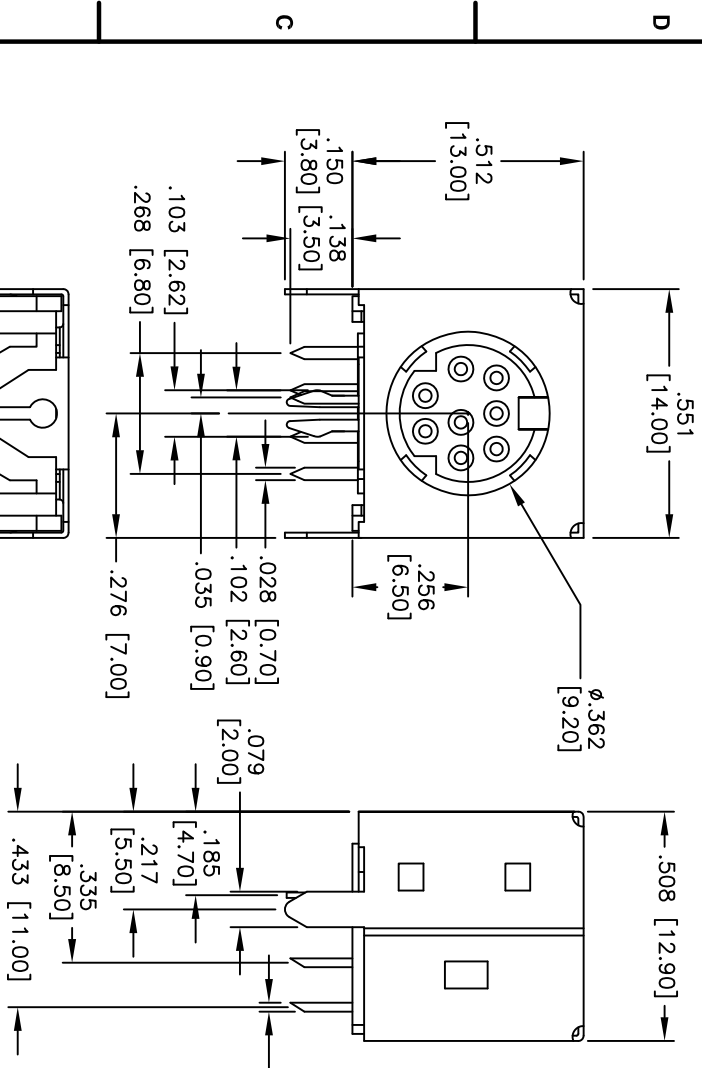

**SPECIFICATIONS:**

Material: Insulator: PBT, glass filled, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Shield: Copper Alloy, Tin plated  
 Plating: Gold over Nickel underplate on contact area, Tin over Copper underplate on tails  
 Electrical: Operating voltage: 100 VAC/12 VDC max.  
 Current rating: 1 Amp max./2 Amps max.  
 Contact resistance: 30 mohms max. initial  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 250 VAC for 1 minute  
 Temperature Rating: Operating temperature: -25°C to +70°C  
 Environmental: Lead free, RoHS compliant.

MATING FACE CONFIGURATIONS					
MDJ-003-FS	MDJ-004-FS	MDJ-005-FS	MDJ-006-FS	MDJ-007-FS	MDJ-008-FS

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES ± .10 XX ± .020 XXX ± .015		HOLE SIZES ØXX ± .10 ØXXX ± .015		DATE	
DRAWN	SS	12/30/05	TITLE		
CHECKED			MINI DIN JACK, RIGHT ANGLE, FULL SHIELD		
APPROVED			SIZE	PART NO.	REV.
			X	MDJ-00X-FS	B
			REF:	S0003T	SHEET 1 OF 1
			SCALE:	NIS	