

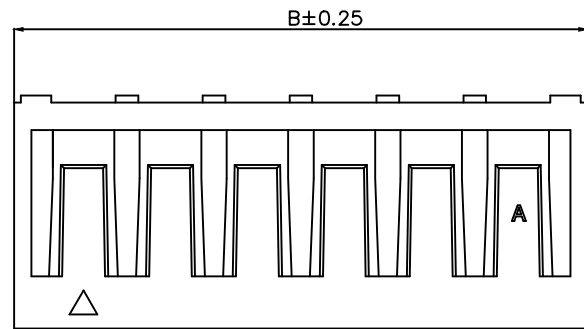
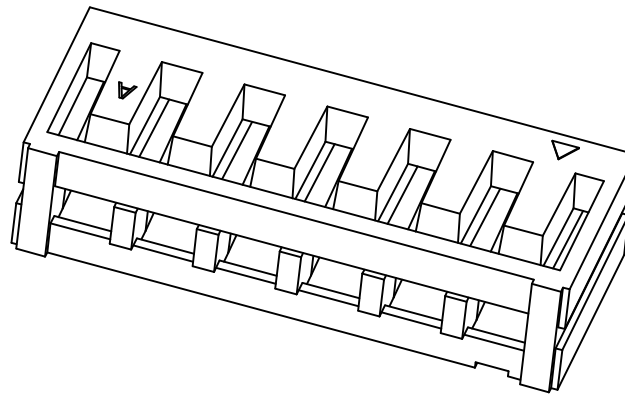


NOTE:

- 1 .ELECTRICAL CHARACTERISTICS
 - 1-1 RATING CURRENT: 3A AC/DC
 - 1-2 RATING VOLTAGE: 250V AC/DC
 - 1-3 INSULATION RESISTANCE: 1000M OHMS MIN
 - 1-4 WITHSTANDING VOLTAGE: 800V AC/1MINUTE
 - 1-5 OPERATING TEMPERATURE: -40°C~+105°C
- 2. MATERIAL:
 - PA66, UL 94V-0, NATURAL COLOR
- 3. USED WITH AFCI 10156617
- 4. PRODUCT SPEC: GS-12-1595
- 5. ORDERING CODE: 10156616-XX 0 X LF

NUMBER OF PINS PACKAGE
 02~16: 02~16PINS 0: BAG

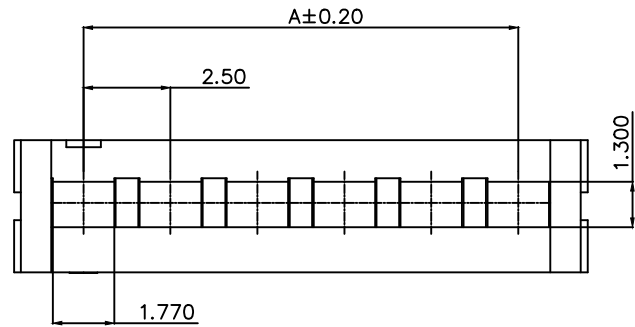

POS	DIMENSIONS(MM)		POS	DIMENSIONS(MM)	
	A	B		A	B
2	2.50	6.50	10	22.50	26.50
3	5.00	9.00	11	25.00	29.00
4	7.50	11.50	12	27.50	31.50
5	10.00	14.00	13	30.00	34.00
6	12.50	16.50	14	32.50	36.50
7	15.00	19.00	15	35.00	39.00
8	17.50	21.50	16	37.50	41.50
9	20.00	24.00			

Amphenol FCI

© 2016 AFCI

mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 406	ISO 101	MINITEK	
ltr	ecn no	dr	date	title	
A	New release	Jason	2020-2-19	2.5PITCH BOARD-IN, R/A , HOUSING	
tolerances unless otherwise specified		angles	linear	mm	dwg no
		0°±x'	.X±.3	←	sheet 1 of 1
			.XX±.20	→	size
			.XXX±.10	scale 2:1	A3
		dr	Jason Wang	2020-2-19	Amphenol FCI
		enr	Jason Wang	2020-2-19	10156616
		chr	-	-	type
		app	Tim Yao	2020-2-19	Product Customer Drawing
sheet	revision	A			
index	sheet	1			