
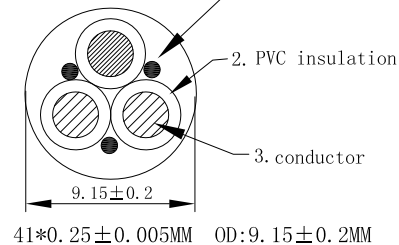
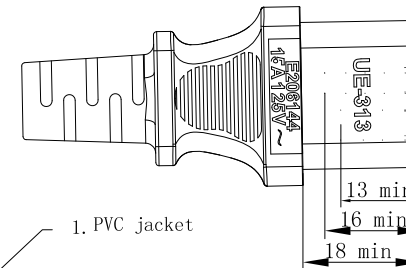
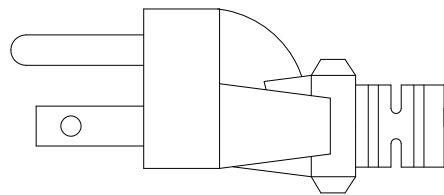


Items	Content Revised	Date
1		

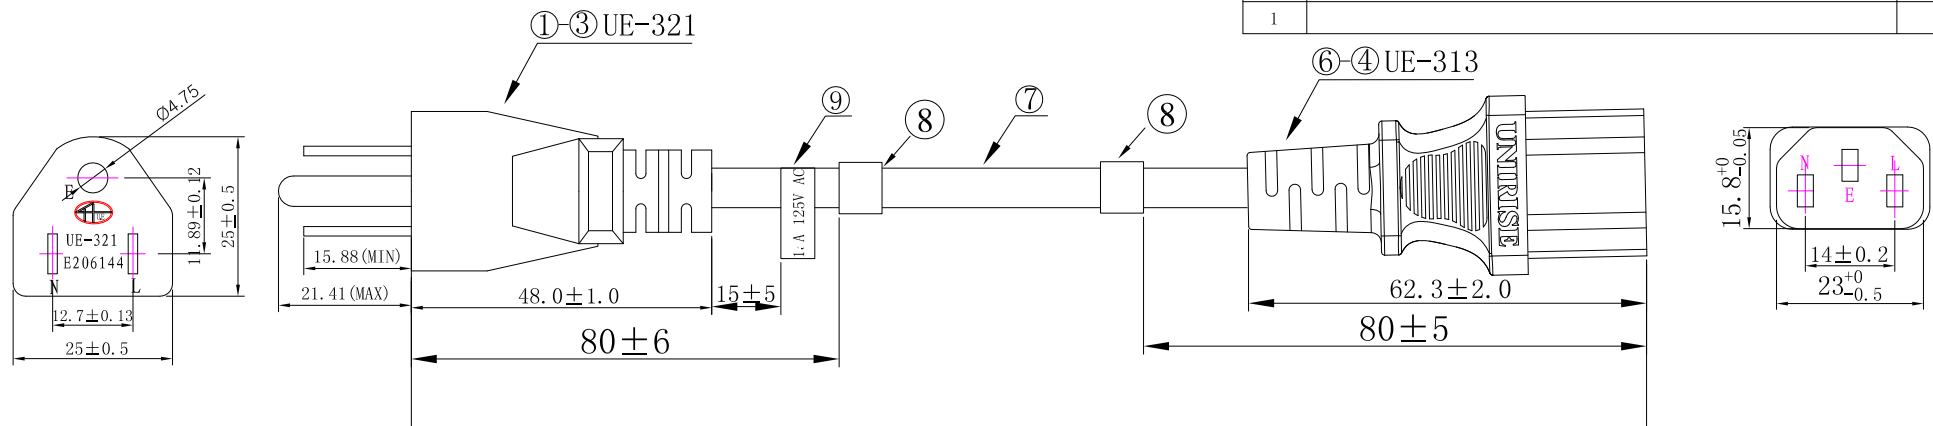

Technical requirements:

1. Plug: a:UE-321, Current (A) :13, Voltage (V) :125
b:UE-313, Current (A) :13, Voltage (V) :125
2. Cord: Soft SJT #16/3C 105°C unirise
3. High Voltage Tested: 1500V/S No Attacked, No Flicker
4. No nick, Spot, Mottle Nn Appearance and Wording is Clearly
5. The All Material Compliance with RoHS and REACH

BOM表

9	39002005	UL Label 13A 125V AC	1PCS	----
8	39005021	47x13mm PET Paster Length label	2PCS	----
7	205353021043	SJT 16/3C 105°C Soft	1PCS	
6	306560619	PVC of plug 77A	/	
5	316313900	Inside Shelf (S8741PL-39)	1PCS	White
4	315313902	Blade of UE-313 (98740BS-0)	3PCS	----
3	306310619	PVC of plug 77A	/	
	315321900	Blade of UE-321	1PCS	----
2	315222900	NO Polarity Blade	2PCS	----
1	316321900	Inner frame	1PCS	White
Items	Part Number	Description	Q' TY	Colour

CORD MARKING: E176096 (UL) SJT VW-1 105°C 300V 3x2.08mm² (16 AWG)
Or C(UL) SJT FT1 105°C 300V 3x2.08mm² (16 AWG) UNIRISE

CUSTOMER CONFIRM	PWCD-515PC13-13A-XXF-YYY	XXF = LENGTH YYY = COLOR
Drawing No.: PWCD-515PC13-13A-XXF-		Page: Version:A
Power Supply Cord: UE-321+UE-313		Approved by: jason
Customer:		Checked by: king
Colour:		Drawn by: songyu
Sample Part NO.: W009-007-2013	Unit: mm	Sheet:
		DATE: 2013-07-09