

2. **Features**

- * Stable and reliable in performances
- * Compact size
- * RoHS compliance

3. Applications

- * Machine-to-machine wireless communication.
- * Smart home devices.
- * GSM/3G position routers &tracking systems.

4. Description

Unictron's WC75D0 FPCB antenna is designed for cellular 3G / GSM bands applications, covering frequencies 824~960 MHz & 1710~2170 MHz. Fabricated with proprietary design and processes, WC75D0 shows excellent performance and is fully compatible.

5. **Electrical Specifications**

(Antenna is attached on a 2.0mm-thick ABS + PC material plate)

5-1. Electrical Table (824~960 MHz Band)

Characteri	stics	Specifications	Unit			
Outline Dimensions		75.0 x 8.5 x 0.15	mm			
Working Frequency		824~960 MI				
VSWR		3 Max. (typical)				
Characteristic Impedar	nce	50	Ω			
Polarization		Linear Polarization				
Peak Gain		0.8 (typical)	dBi			
Efficiency	(@890 MHz)	46 (typical)	%			



詠業科技股份有限公司

Unictron Technologies Corporation Website:www.unictron.com

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES tron CORPORATION AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE SALE OF APPARATUS OR DEVICES WITHOUS/30 PERMISSION

Prepared by : Xenia

Designed by : Tom

Checked by : Chinling


TITLE : 75.0 x 8.5 x 0.15 (mm) 3G / GSM FPCB Antenna	DOCUMENT	H2B4KF1F1N0200	REV.		
(WC75D0) Engineering Specification	NO.		В		
		PAGE 2 OF	8		


Document Control

Approved by : Herbert

5-2. Electrical Table (1710~2170 MHz Band)									
Characteris	stics	Specifications	Unit						
Working Frequency		1710~2170 MHz							
VSWR		3 Max. (typical)							
Characteristic Impedar	nce	50	Ω						
Polarization		Linear Polarization							
Peak Gain	(@1950 MHz)	2.7 (typical)	dBi						
Efficiency		64 (typical)	%						


5-3. Return Loss & VSWR

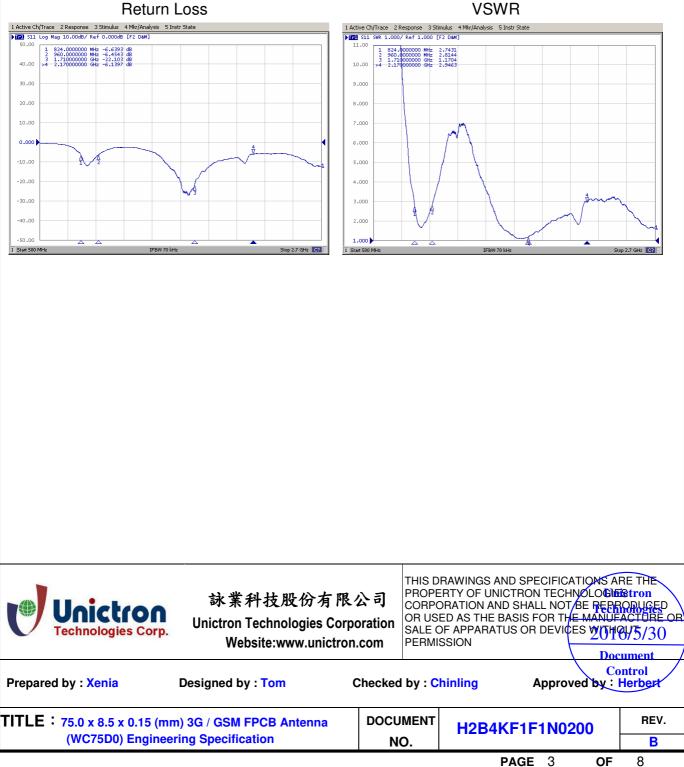


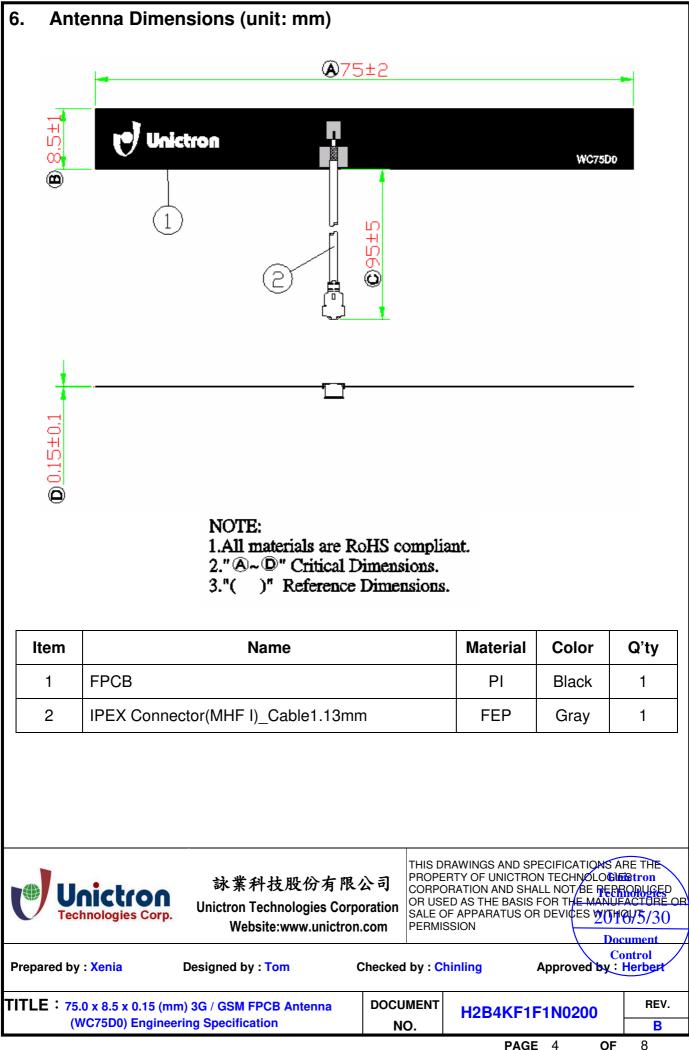







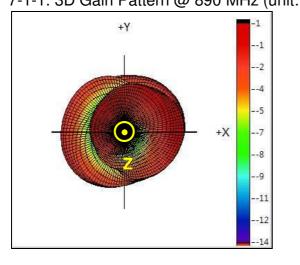

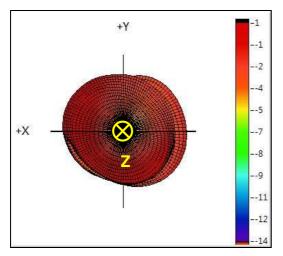

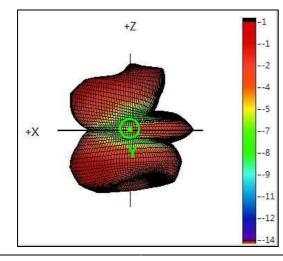

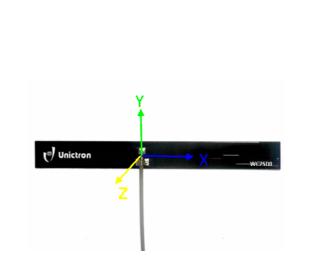

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF UNICTRON TECHNOLOGIES tron CORPORATION AND SHALL NOT BE REPROPUGED OR USED AS THE BASIS FOR THE MANUFACTURE SALE OF APPARATUS OR DEVICES W1140/5/30 OB PERMISSION

> Document Control

Approved by : Herbert

```
Prepared by : Xenia
```

Technologies Corp.

Designed by : Tom

Checked by : Chinling

TITLE : 75.0 x 8.5 x 0.15 (mm) 3G / GSM FPCB Antenna	DOCUMENT	H2B4KF1F1N0200	REV.	
(WC75D0) Engineering Specification	75D0) Engineering Specification NO.			
		PAGE 5 OF	8	


詠業科技股份有限公司

Unictron Technologies Corporation


Website:www.unictron.com

7-1-2. 3D Efficiency Table																
Frequency(MHz)	824	830	840	850	860	870	880	890	895	900	910	920	930	940	950	960
Efficiency(dB)	-4.2	-4.3	-4.7	-5.0	-4.4	-3.6	-3.4	-3.4	-3.4	-4.0	-4.3	-4.5	-4.1	-4.3	-4.8	-5.2
Efficiency(%)	37.7	37.4	33.8	31.4	36.4	43.8	45.9	46.0	46.2	39.9	37.5	35.8	38.5	37.5	33.3	29.9
Peak Gain(dBi)	0.5	0.2	-0.3	-0.6	-0.1	0.7	0.8	0.8	0.9	0.6	0.6	1.1	1.6	1.5	0.6	0.0

7-1-3. 3D Efficiency vs. Frequency

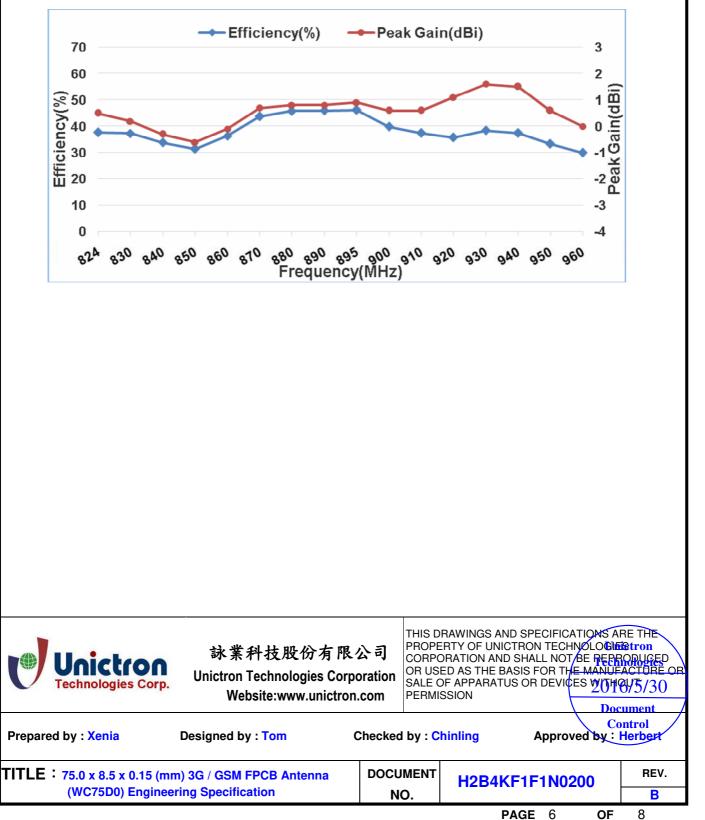

7-2. 1710~2170 MHz Band

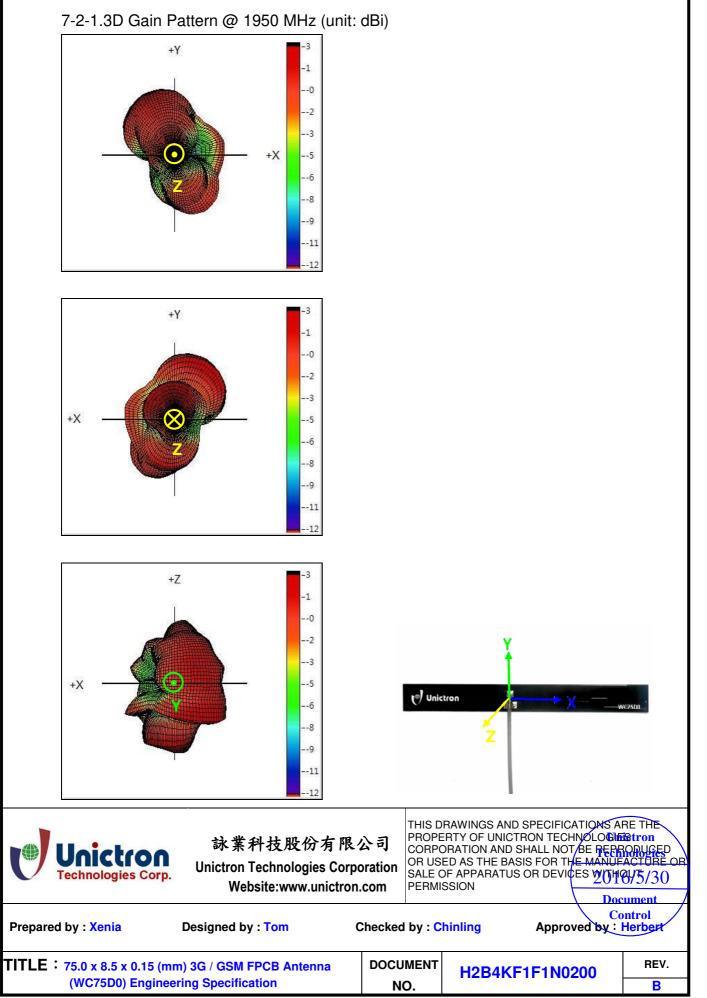

8

7-2-2. 3D Efficiency Table																
Frequency(MHz)	1710	1740	1770	1800	1830	1860	1890	1920	1950	1980	2010	2040	2070	2100	2130	2170
Efficiency(dB)	-2.5	-1.7	-1.5	-1.6	-1.8	-1.8	-1.6	-1.9	-1.9	-2.0	-2.0	-3.2	-3.0	-2.8	-3.8	-3.7
Efficiency(%)	56.2	68.1	70.2	68.9	65.6	66.7	68.6	65.0	64.3	63.7	63.5	48.3	50.2	52.4	41.5	42.9
Peak Gain(dBi)	2.9	3.4	3.9	3.9	3.3	3.1	3.0	2.8	2.7	2.4	2.3	0.7	0.7	1.4	0.6	1.3

