

**Ratings**

Voltage: 300 V  
 Temperature: -25 to 80 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 8  
 Gauge: 20 AWG 0.52 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\varnothing$ 0.16 mm x 26  
 Resistance at 20 °C: 36.7  $\Omega$  /km max

**Insulator**

Material: PVC  
 Color: red, black, white, yellow, blue, green, orange, purple  
 Diameter:  $\varnothing$ 1.55  $\pm$ 0.10 mm  
 Nominal thickness: 0.28 mm  
 Resistance at 20 °C: 10 M $\Omega$  /km min

**Filler**

Material: cotton rope



**Outer jacket**

Material: PVC  
 Color: gray  
 Diameter:  $\varnothing$ 7  $\pm$ 0.30 mm  
 Nominal thickness: 0.94 mm

**Wire marking:** E339579 UL AWM STYLE 2464 20 AWG 80°C  
 300V VW-1 --- cUL AWM I/II A 80°C 300V FT1 TENSILITY

**Tests**

Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113  $\pm$ 2 °C for 7 days:  
 Minimum tensile strength 70 % original  
 Minimum elongation 65 % original  
 Heat shock: 121  $\pm$ 1 °C /1 hour, no observed degradation  
 Deformation: 121  $\pm$ 1 °C /1 hour,  $\leq$  50 %  
 Cold bend: -10  $\pm$ 2 °C /1 hour, no observed cracking

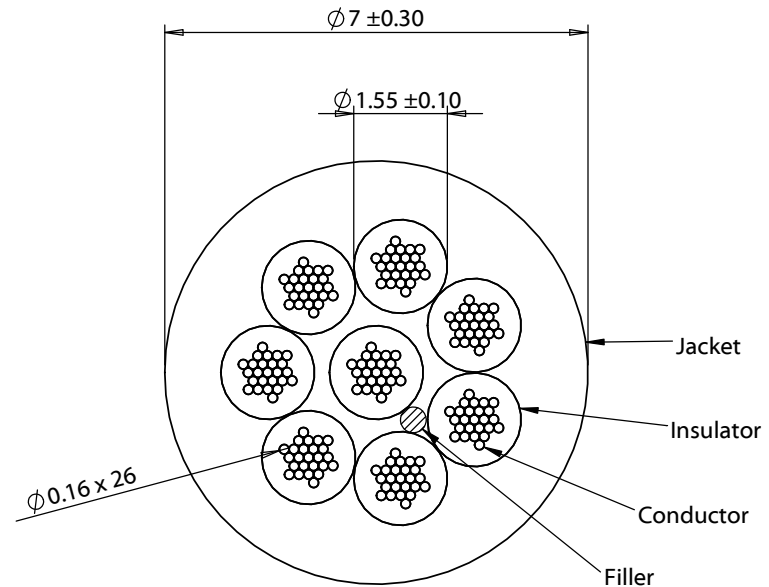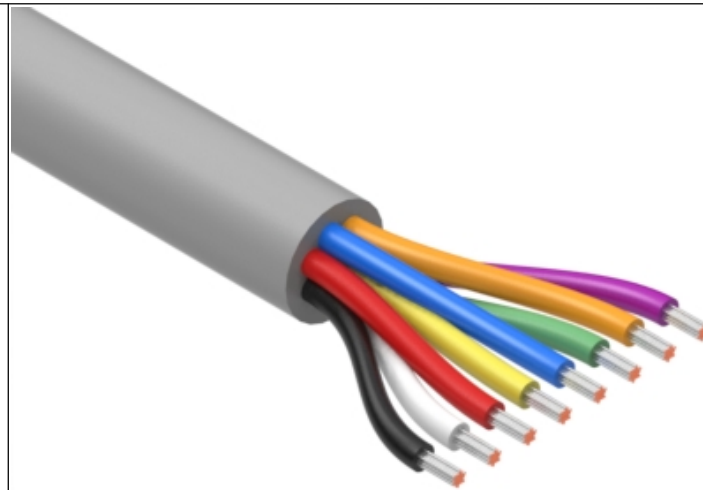

Revision:	Date:	Description:	Prepared:	Notes:	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	5/16/2019	Initial release	AW <small>Digitally signed by AW Date: 2019.05.16 14:15:54 -07'00'</small>	RoHS compliant	
			Verified:	Function test: no open, no short circuit, no intermittent	Size: Part number:
			JP <small>Digitally signed by JP Date: 2019.05.17 12:22:50 -07'00'</small>	Description:	A 30-01315
			Dimensions are in millimeters. Tolerances: X: $\pm$ 0.5 mm X.X: $\pm$ 0.3 mm X.XX: $\pm$ 0.05 mm	Wire, 8C TS, 20 AWG, UL2464, 300V, 80C, 7 mm, VW-1, PVC, 60P, gray	Scale: 8:1
					Sheet 1 of 1

5

4

3

2

1