
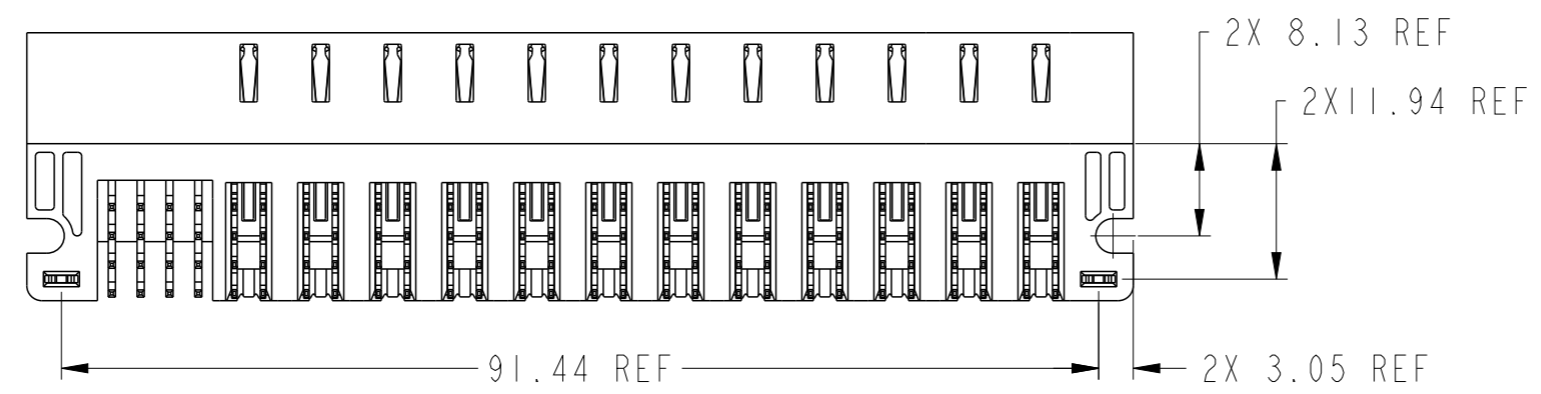
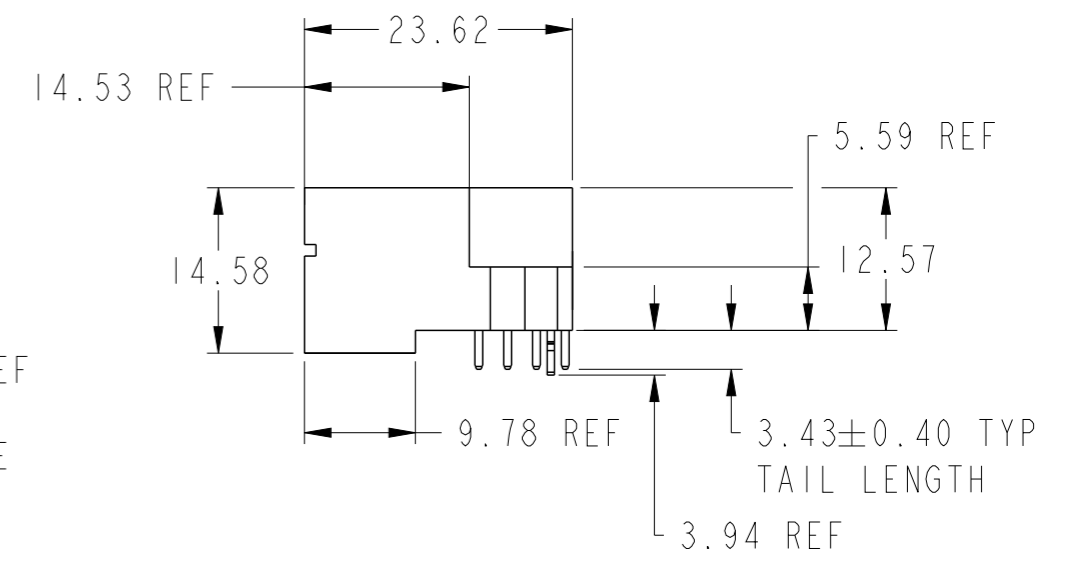
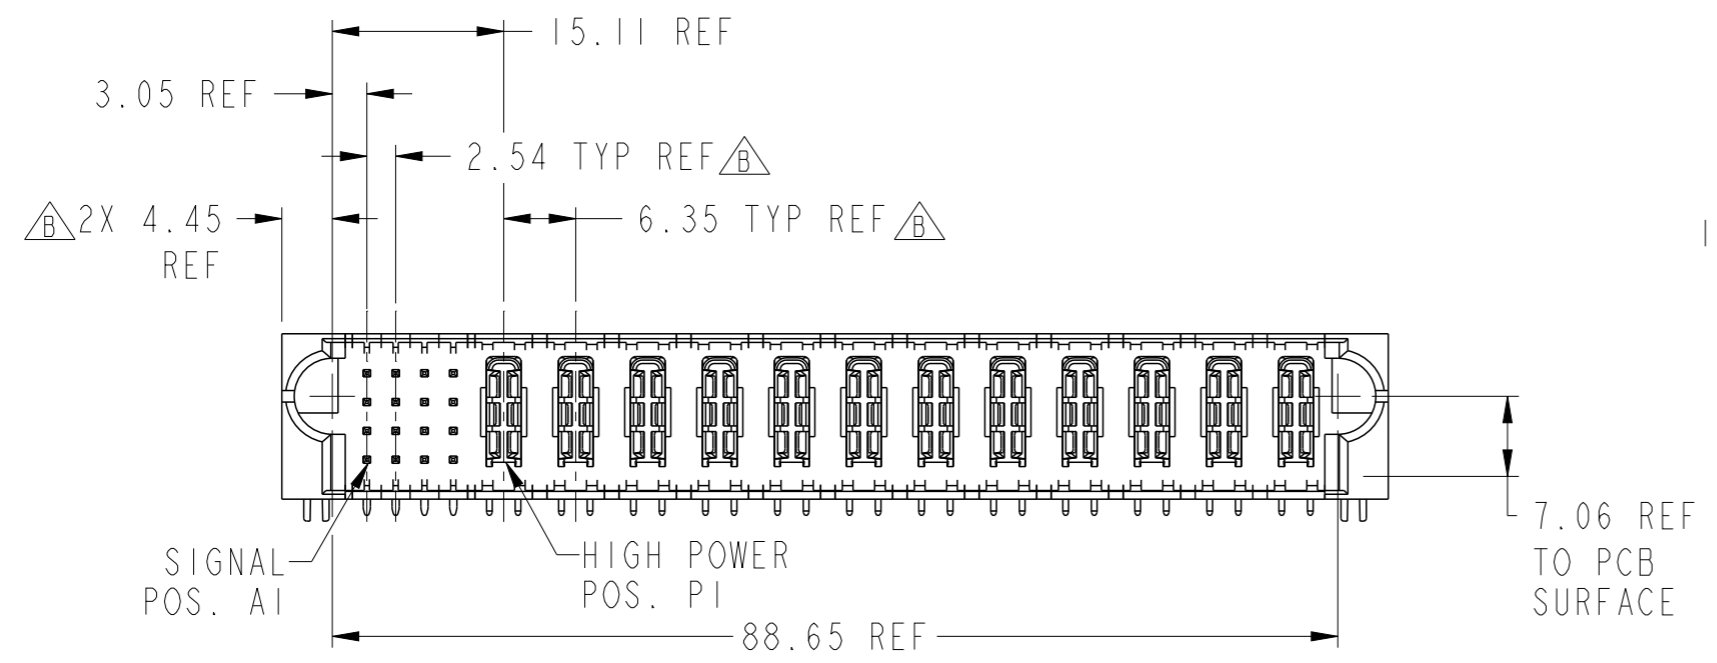



PART NUMBER 10106124-C004001LF

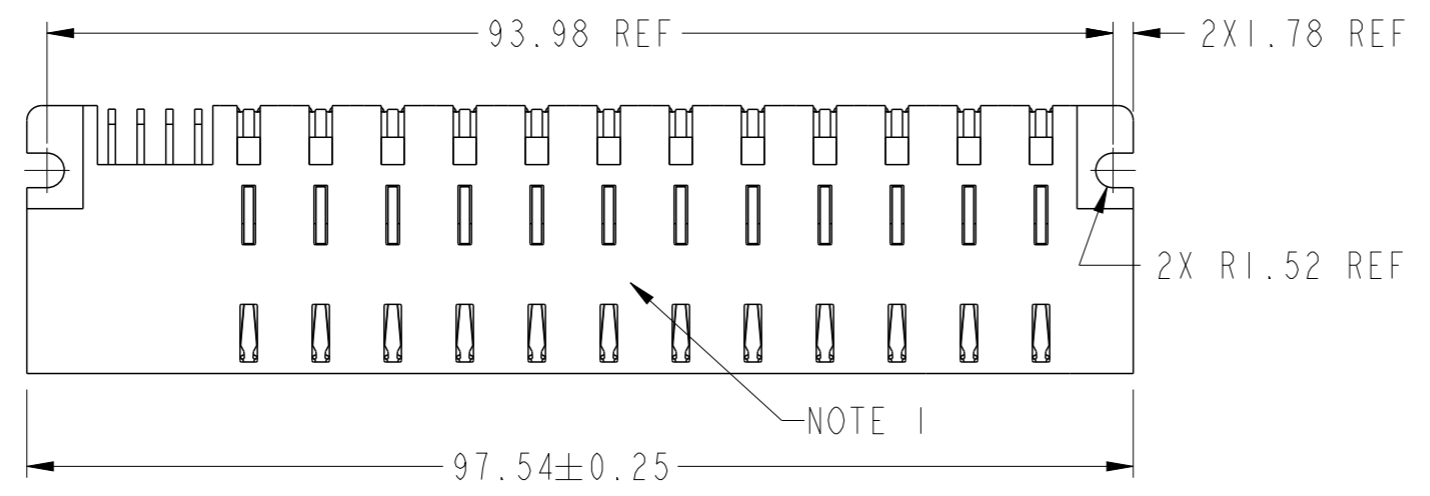

Copyright FCI.

spec ref	-	dr	Peng-Bing Fu	2012/03/20	projection	MM	size	A3	scale	3:2														
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	2012/11/13			ecn no	ELX-DG-013143-1	rel level	Released														
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Shao-Qi Kuang	2012/11/15							product family	PwrBlade+												
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.50</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.10</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.50		0.XX	±0.25		0.XXX	±0.10	angular	0°	±2°	appr	Pei-Ming Zheng	2012/11/15			part no	16S + 12HP	dwg no	10106124-C004001	rev	B
linear	0.X	±0.50																						
	0.XX	±0.25																						
	0.XXX	±0.10																						
angular	0°	±2°																						
ASME Y14.5		www.fci.com			cat. no.	Product - Customer Drw		sheet 1 of 3																

PRODUCT NO.	ROWS	SIGNAL														HIGH POWER														E2
		E1	1	2	3	4	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12												
10106124-C004001LF	DCBA	HA	HHUU	TTTT	SSSS	RRRR	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	HA									

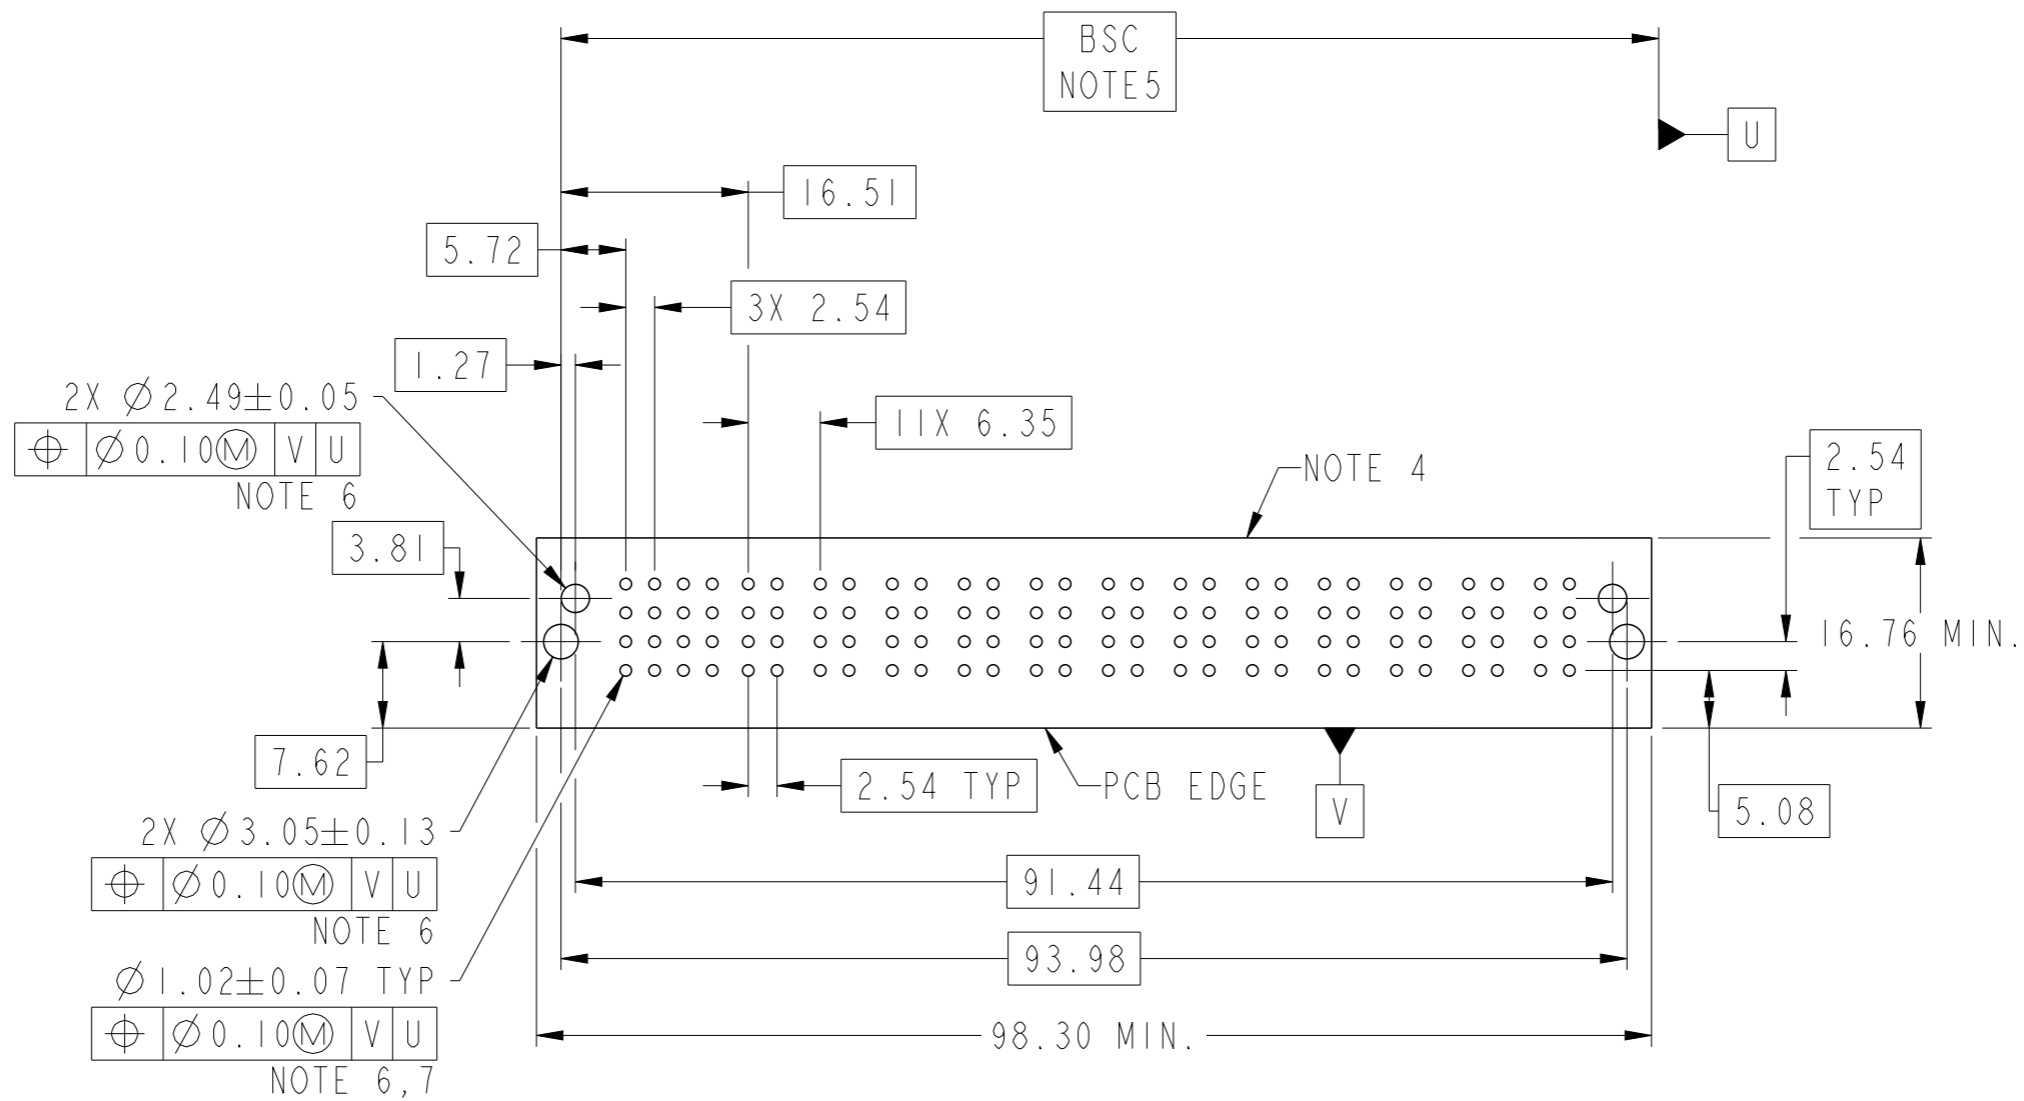

CODE	DESCRIPTION
H1	STD HIGH POWER CONTACT
HA	METAL HOLD DOWN
H	FBLM, SIGNAL CONTACT ROW D
R	STD SIGNAL CONTACT, ROW A
S	STD SIGNAL CONTACT, ROW B
T	STD SIGNAL CONTACT, ROW C
U	STD SIGNAL CONTACT, ROW D

spec ref	-	dr	Peng-Bing Fu	2012/03/20	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	2012/11/13			ecn no	ELX-DG-013143-1	rel level	Released
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Shao-Qi Kuang	2012/11/15						
surface	linear	appr	Pei-Ming Zheng	2012/11/15			part no	16S + 12HP	dwg no	10106124-C004001
ASME Y14.5	angular	www.fci.com		cat. no.	Product - Customer Drw		rev	B	sheet 2 of 3	



Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- $\triangle B$ 9) A $\triangle B$ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.



Copyright FCI.

spec ref -		dr	Peng-Bing Fu	2012/03/20	projection	MM	size	A3	scale	3:2	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Peng-Bing Fu	2012/11/13		← →	ecn no		ELX-DG-013143-1		
ASME Y14.5		chr	Shao-Qi Kuang	2012/11/15			product family		PwrBlade+		rel level
surface <input checked="" type="checkbox"/>		linear	appr	Pei-Ming Zheng	2012/11/15	16S + 12HP		dwg no	10106124-C004001		rev
ASME Y14.5	angular	www.fci.com		cat. no.	Product - Customer Drw		sheet 3 of 3				
		0.X	±0.50								
		0.XX	±0.25								
		0.XXX	±0.10								
		0°	±2°								